?Y

SOT-89 NPN Silicon NPN transistor in a SOT-89 Plastic Package.

E


, 2SB1132

Low saturation voltage, complements the 2SB1132.


V

Medium power amplifier applications.

J



A



PIN1 Base PIN 2 Collector PIN 3 Emitter

.

h_{FE} Classifications Symbol	P	Q	R
h_{FE} Range	82 180	120 270	180 390
Marking	HDAP**	HDAQ**	HDAR**


ώ ̈ Ξ ̃Ạ ⌟

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	32	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current-Continuous	I_C	1.0	A
Collector Base-Continuous(Pulse)	I_{CP}	2.0	A
Collector Power Dissipation	P_C	500	mW
Collector Power Dissipation	P_C(Tc=25)	2.0	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

≠ ∧ Ξ ̃Ạ ⌟


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	I_C=50 A I_E=0	40			V
Collector to Emitter Breakdown Voltage	V_{CEO}	I_C=1.0mA I_B=0	32			V
Emitter to Base Breakdown Voltage	V_{EBO}	I_E=50 A I_C=0	5.0			V
Collector Cut-Off Current	I_{CBO}	V_{CB}=20V I_E=0			0.5	A
Emitter Base Cut-Off Current	I_{EBO}	V_{EB}=4.0V I_C=0			0.5	A
DC Current Gain	h_{FE}	V_{CE}=3.0V I_C=100mA	82		390	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=500mA I_B=50mA		0.15	0.4	V
Transition Frequency	f_T	V_{CE}=5.0V I_C=50mA f=100MHz		150		MHz
Collector Output Capacitance	C_{ob}	V_{CB}=10V I_E=0 f=1.0MHz		15		pF

≠ ∃ ÃΈ ∀ ƒ

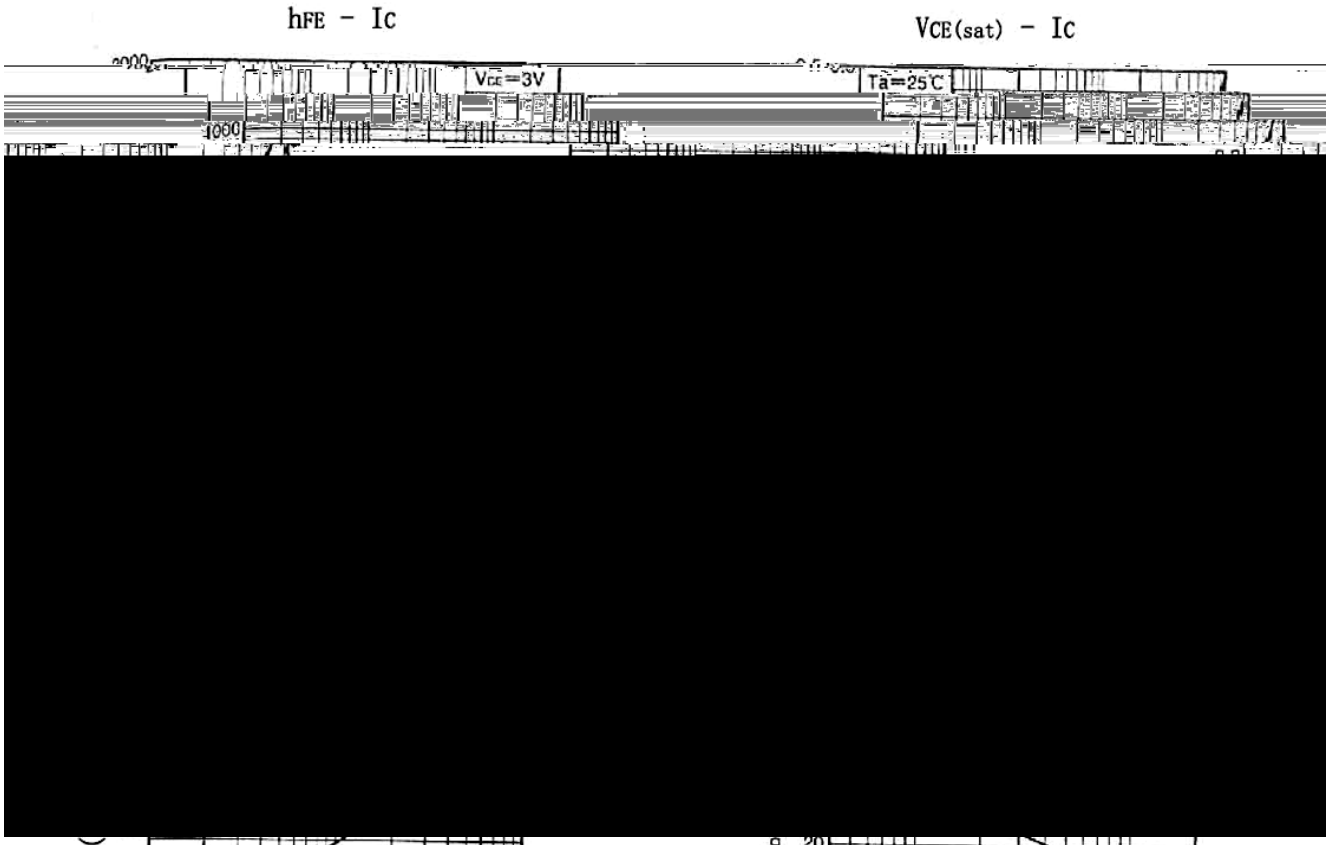




ᵘ ĖÒĻ ʃ

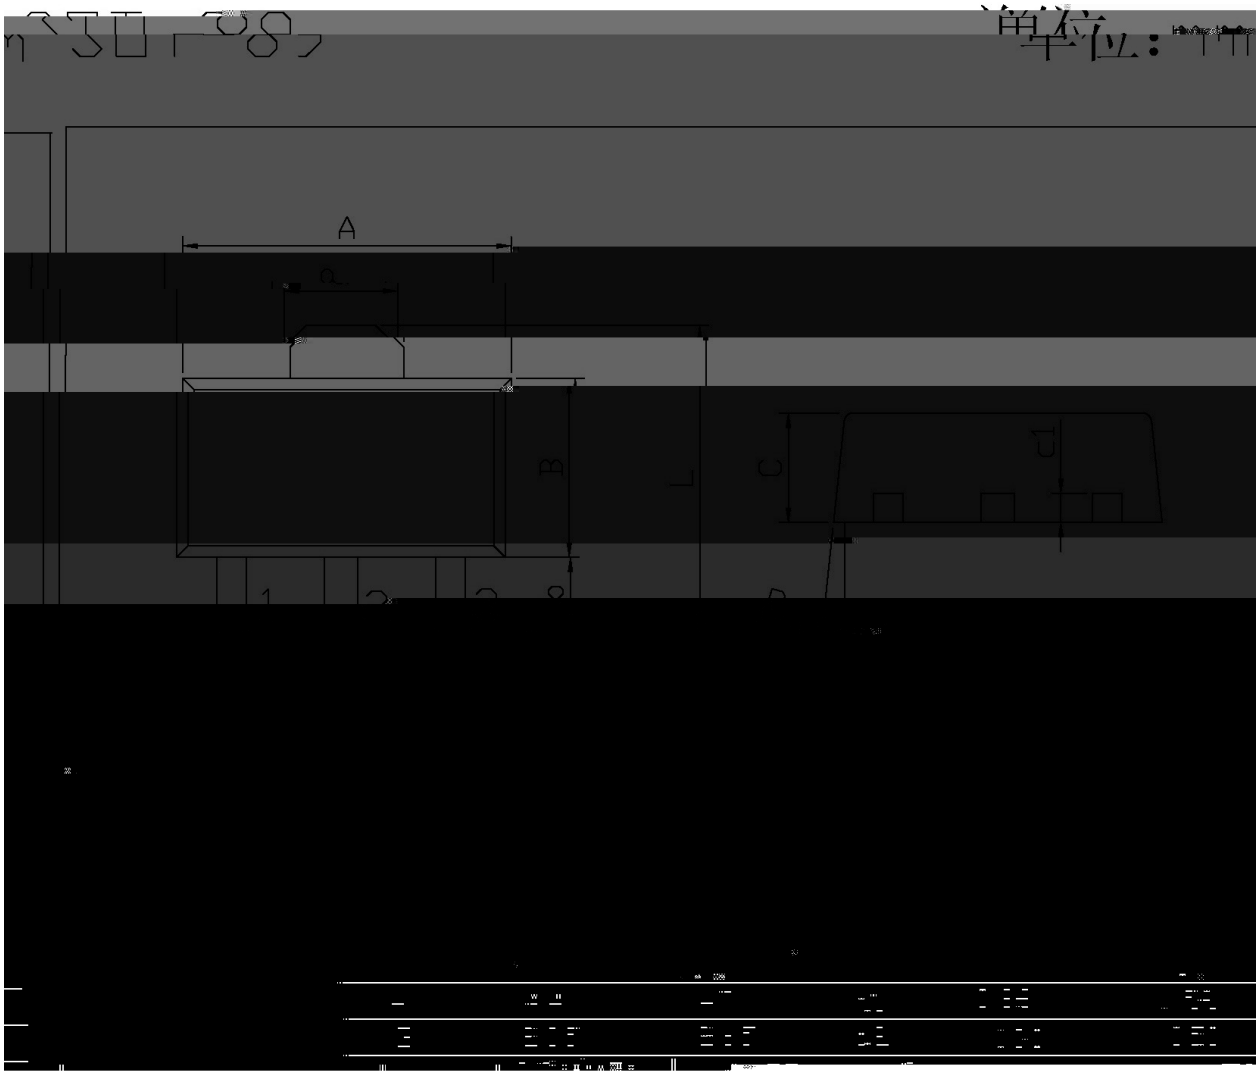

Ł. Ļ Ω

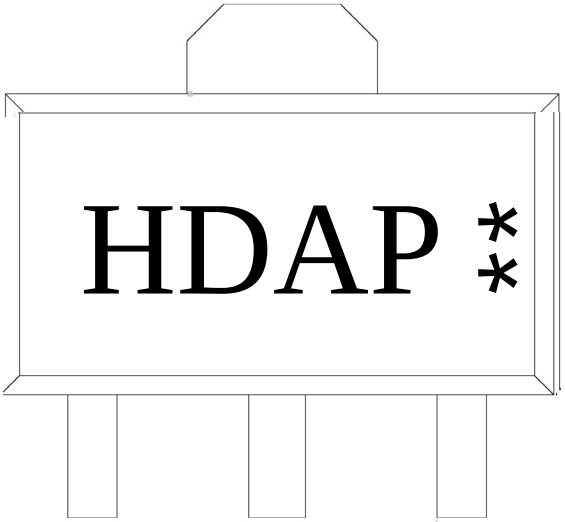

H

DA

P h_{FE}

**

Note:


H: Company Code.

DA: Product Type.

P h_{FE} Classifications Symbol

**: Lot No. Code, code change with Lot No.

Wh p shudwxuh Suriloh iru LU Uhiorz Vroghulqj+Se0luhh,

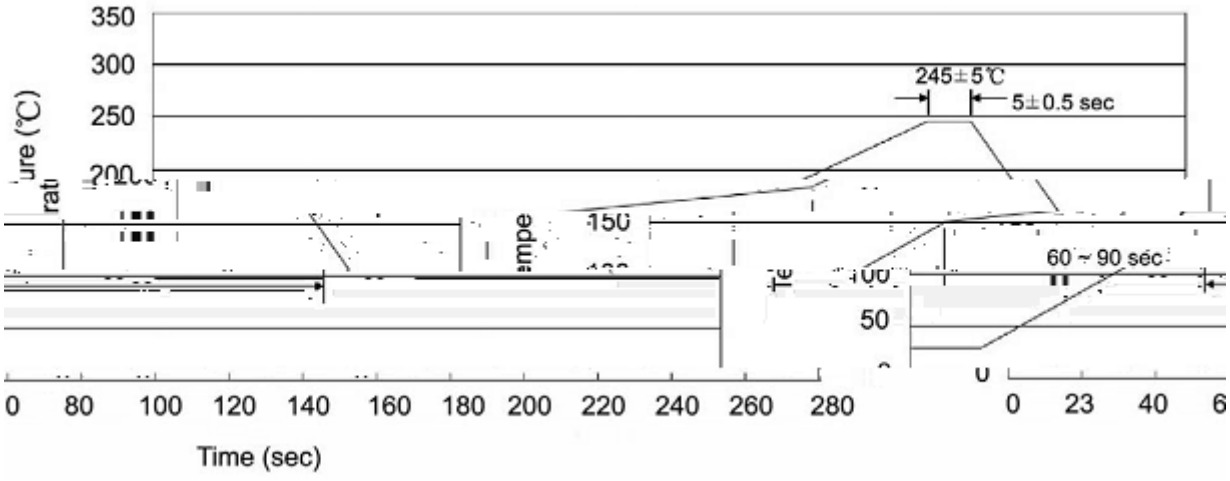

	Note:
1 25 150 60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2 245±5 5±0.5sec;	2.Peak Temp.:245±5 , Duration:5±0.5sec.
3 2 10 /sec.	3. Cooling Speed: 2~10 /sec.

5 d ° Ê % q ‘ ^ Å A € Đ V (` 0 Â ’ A