
TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

$V_{CE(sat)}$, 2SA720

Low $V_{CE(sat)}$,complementary pair with 2SA720.

Audio frequency power amplifier and driver.

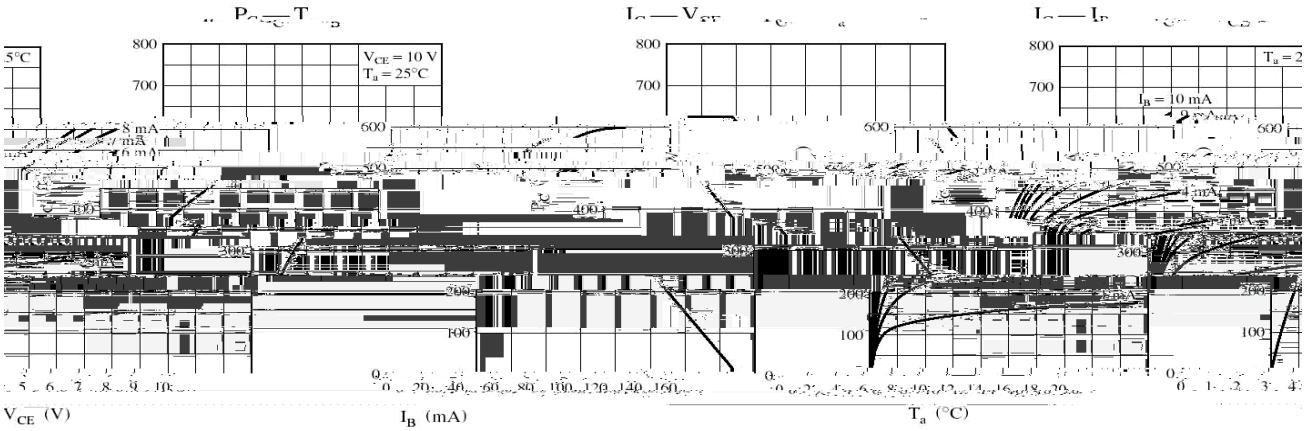


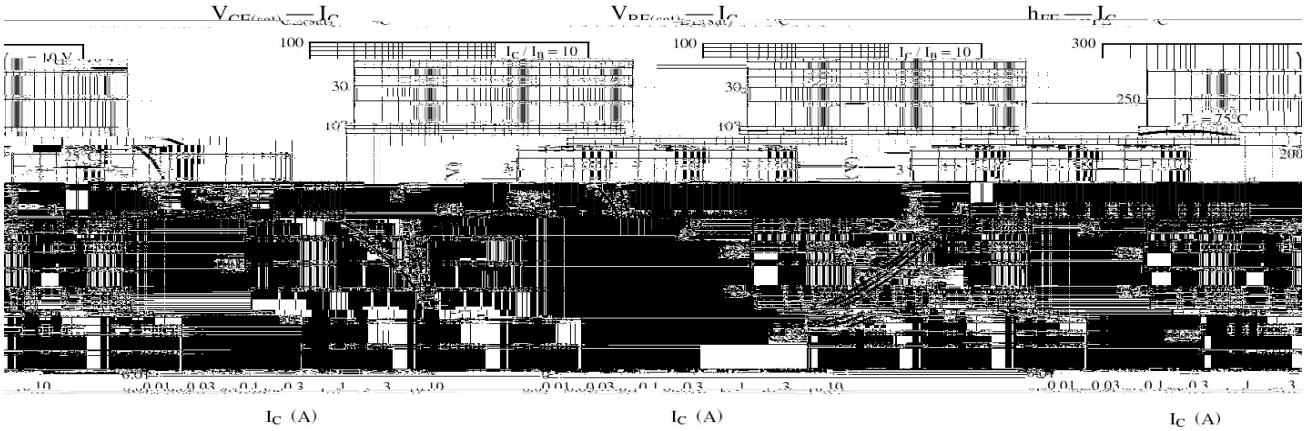


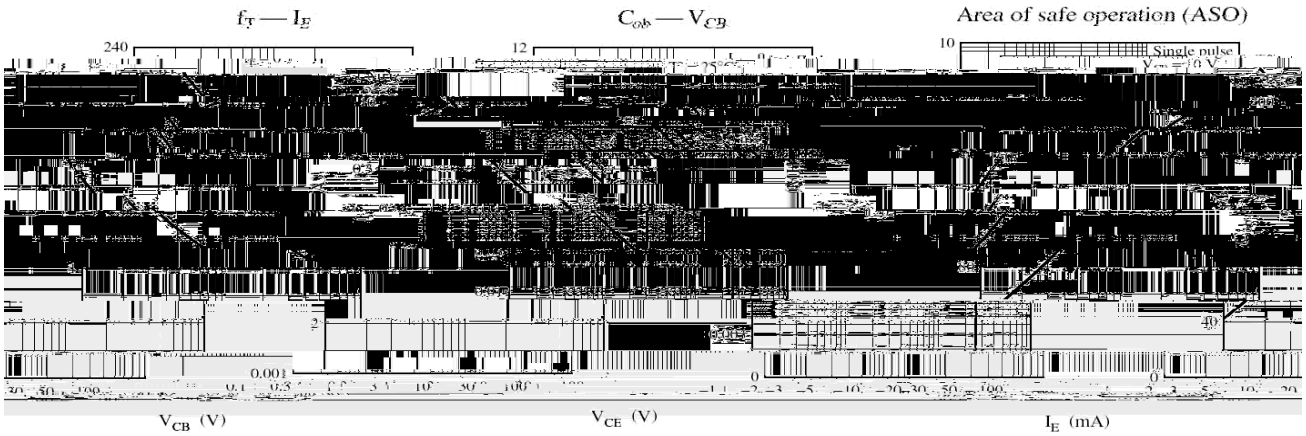
PIN1 Base PIN 2 Collector PIN 3 Emitter

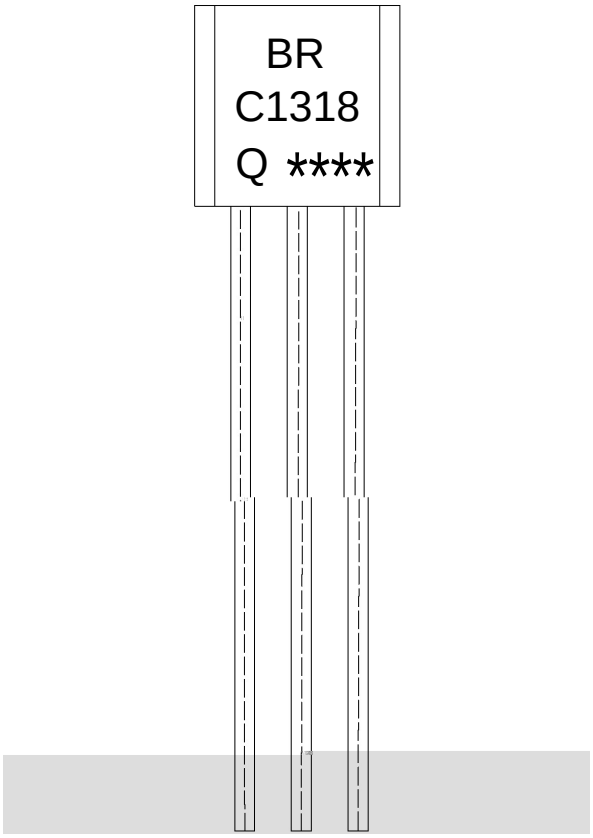
h_{FE} Classifications Symbol	Q	R	S
h_{FE} Range	85~170	120~240	170~340

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	60	V
Collector to Emitter Voltage	V_{CEO}	50	V
Emitter to Base Voltage	V_{EBO}	7.0	V
Collector Current - Continuous	I_C	500	mA
Collector Current – Continuous(Pulse)	I_{CP}	1.0	A
Collector Power Dissipation	P_C	625	mW


V_{CE} (V)
I_B (mA)
T_a (°C)


I_C (A)
I_C (A)
I_C (A)


Area of safe operation (ASO)
V_{CB} (V)
V_{CE} (V)
I_E (mA)



BR:

C1318

Q: h_{FE}

****

Note:

BR:	Company Code.
C1318:	Product Type.
Q:	h_{FE} Classifications Symbol
****:	Lot No. Code,code change with Lot No.