2SA1585

Rev.E Mar.-2016

蓝箭电子 BLUE ROCKET ELECTRONICS

DATA SHEET

/ Descriptions

TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.


/ Features

, 2SC4115

Low $V_{CE(sat)}$,Excellent current gain characteristics; complementary pair with 2SC4115.

/ Applications

Low Frequency Amplifier.






PIN1 Base PIN 2 Collector PIN 3 Emitter


/ hFE Classifications & Marking

Parameter	Symbol	Rating	Unit

/ Marking Instructions

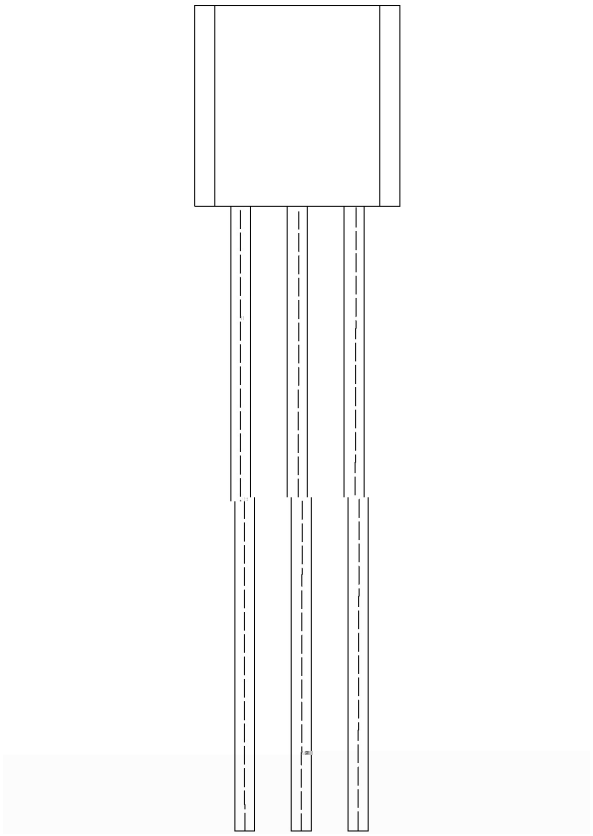

( ) / Temperature Profile for Dip Soldering(Pb-Free)

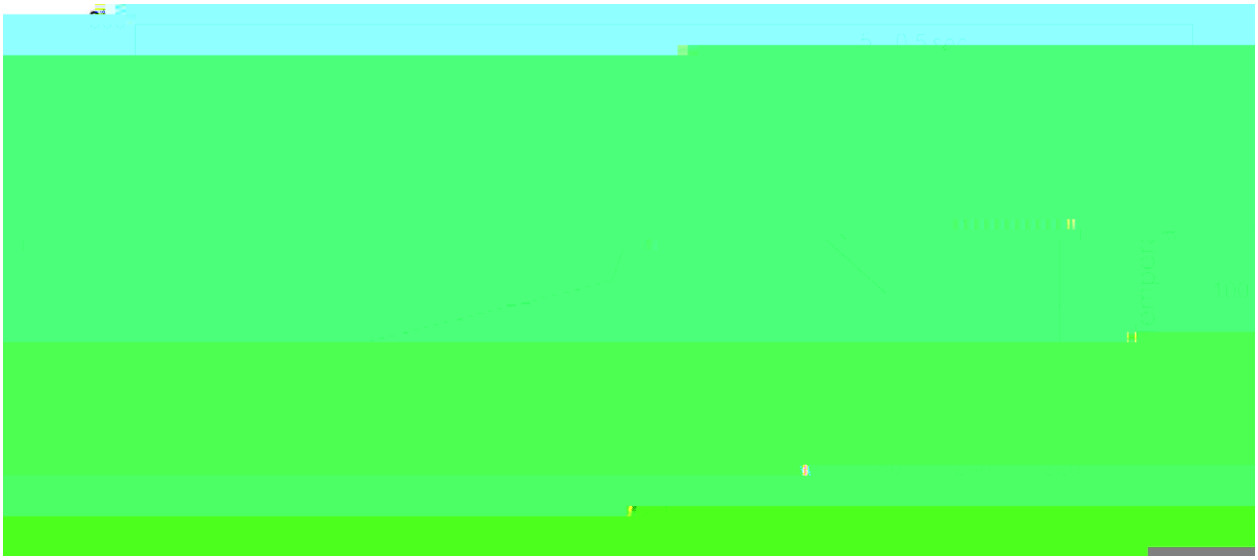

				Note:	
1	25 150	60 90sec;		1.Preheating:25~150 , Time:60~90sec.	
2	255±5	5±0.5sec;		2.Peak Temp.:255±5 , Duration:5±0.5sec.	
3	2 10 /sec.			3. Cooling Speed: 2~10 /sec.	

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension		(unit mm3)
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type	Units					Dimension	(unit mm3)
	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92	3,000	1	120	10	30,000	328×230×42	480×346×235 547×407×268

/ Notices