

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-180	V
Collector to Emitter Voltage	V_{CEO}	-160	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current - Continuous	I_C	-1.5	A
Collector Power Dissipation	P_C	1.5	W
Collector Power Dissipation	P_C(Tc=25)	25	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


Parameter	Symbol	Test Conditions	Min	Typ	Max

/ Electrical Characteristic Curve

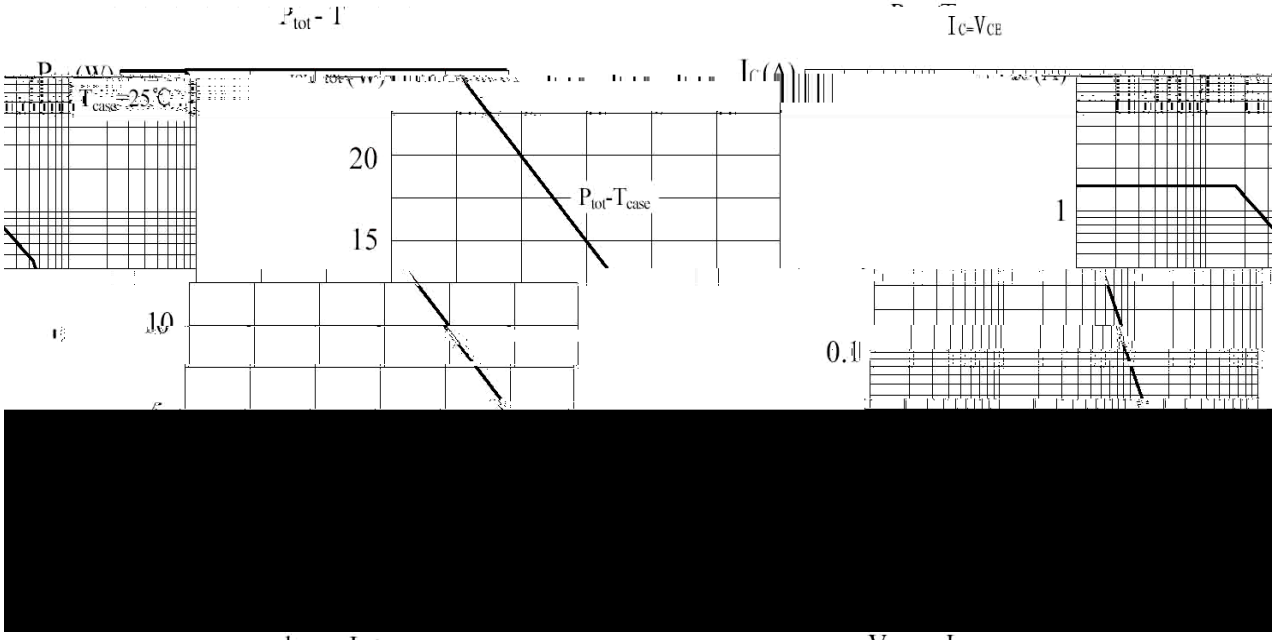


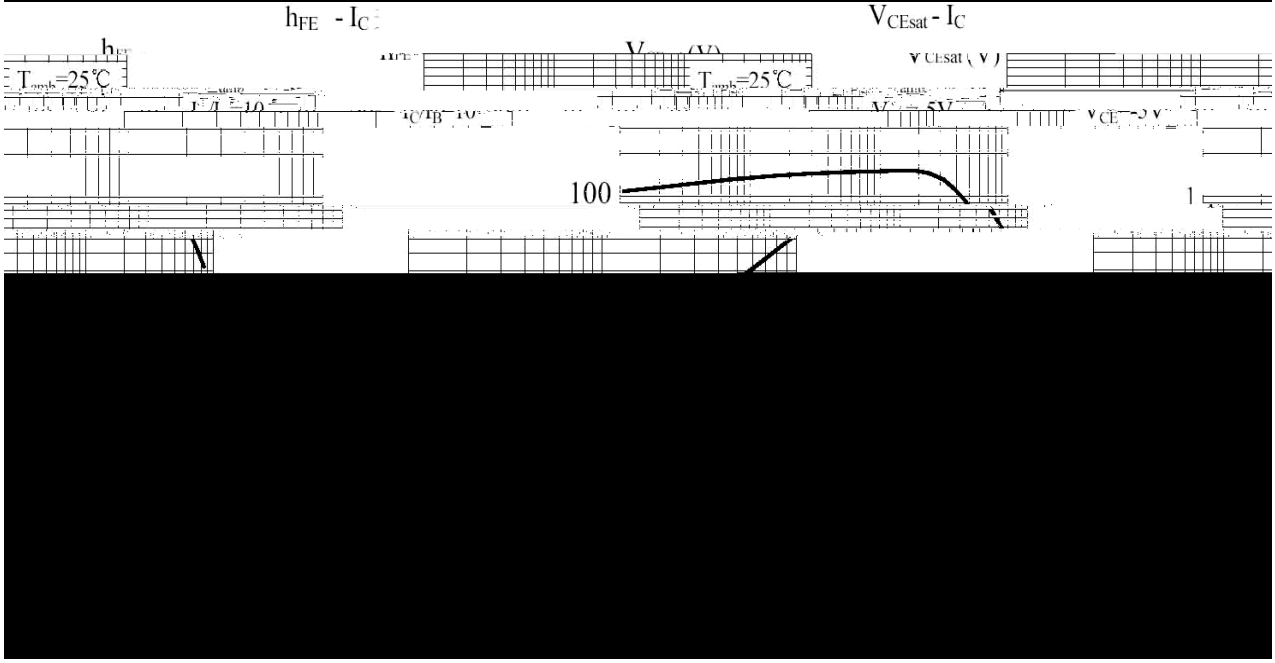

/ Package Dimensions

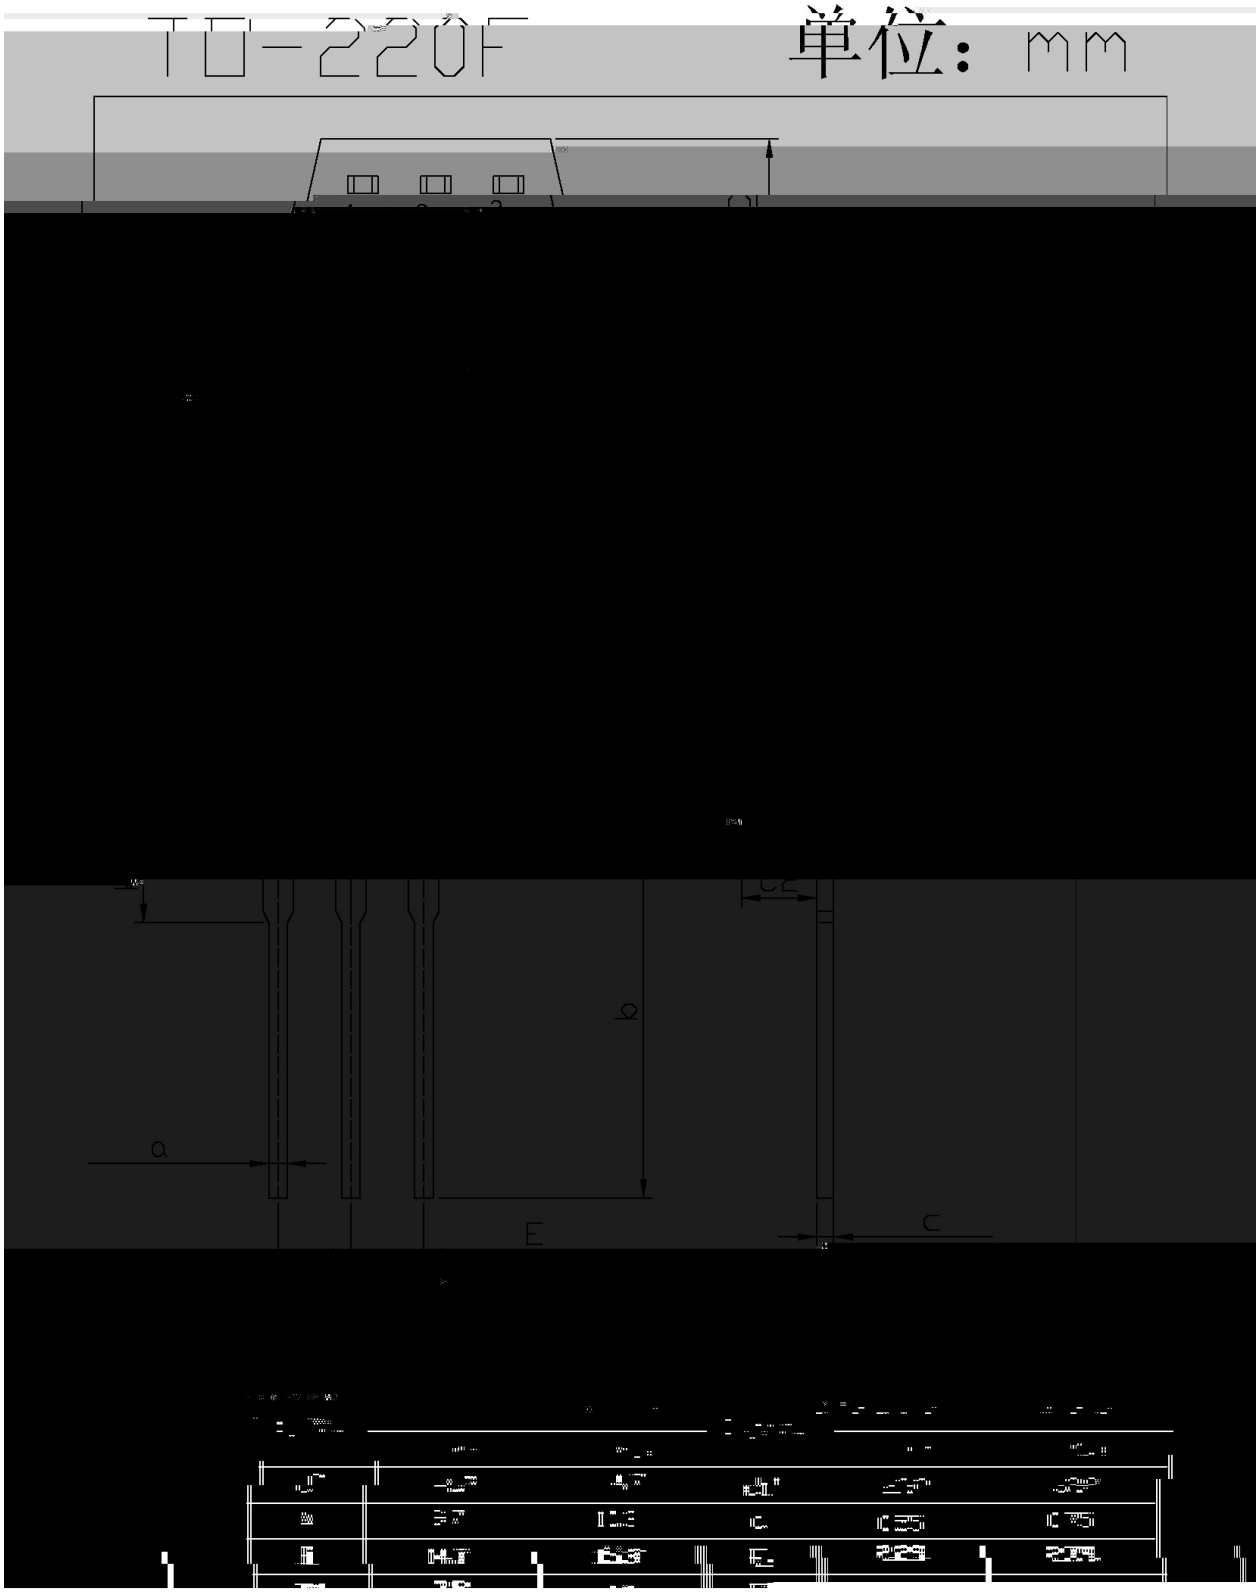

/ Marking Instructions

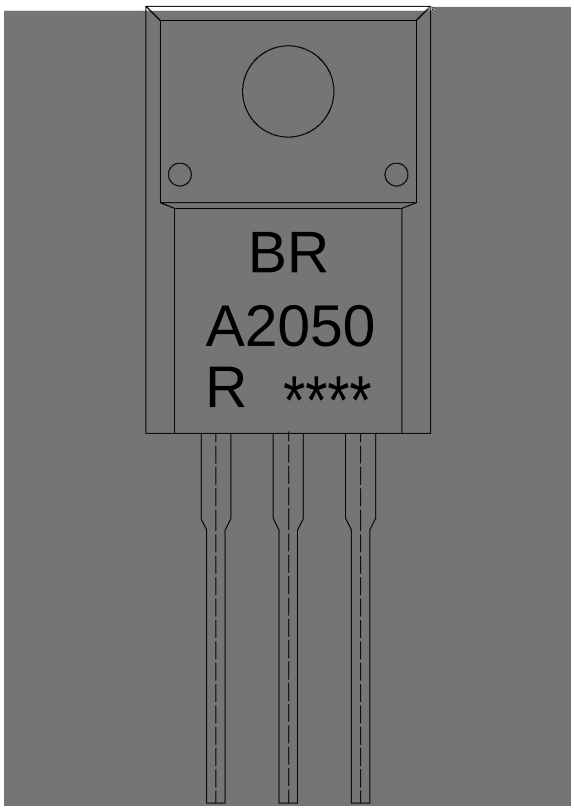

BR

A2050

R: h_{FE}

****

Note:

BR:	Company Code.
A2050:	Product Type.
R:	h_{FE} Classifications Symbol
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)



| | | |