
TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.

2SC1318

Complementary pair with 2SC1318.


AF output amplifier and driver.








PIN1 Base ymPTw2(itCollector -21. 103/TT48Tf49.9667 0 TD63.9403 0199 1 .85/T 0 5 rg5(Si4 287

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-500	mA
Collector Current – Continuous(Pulse)	I_{CP}	-1.0	A
Collector Power Dissipation	P_C	625	mW

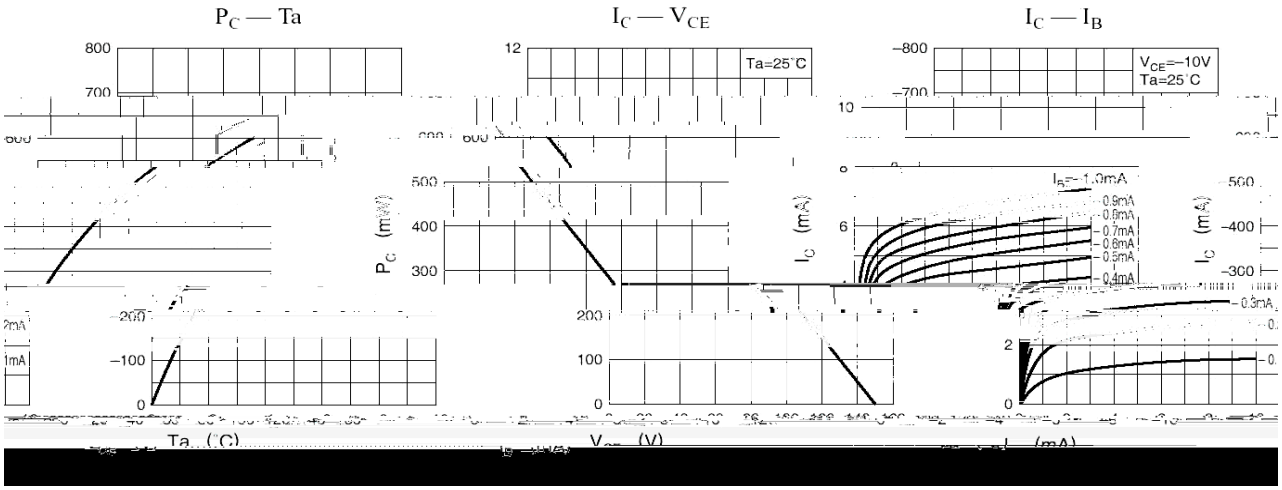
P_C — Ta
I_C — V_CE
I_C — I_B
Ta=25°C
V_CE=−10V
Ta=25°C
P_C (mW)
I_C (mA)
Ta (°C)
V_CE (V)

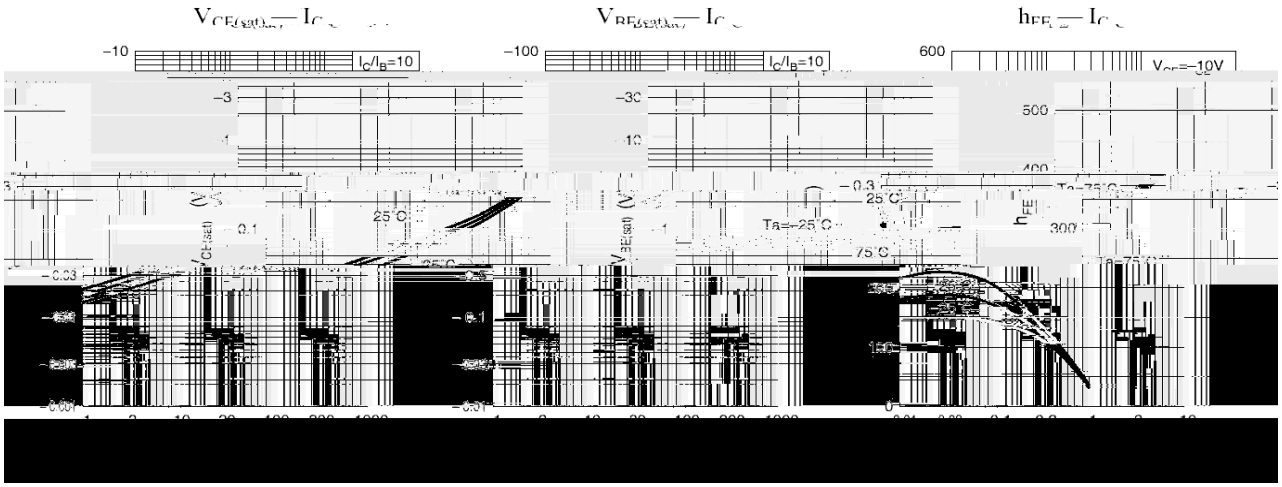
I_C/I_B=10
I_C/I_B=10
V_CE=−10V
25°C
75°C
−25°C
h_FE

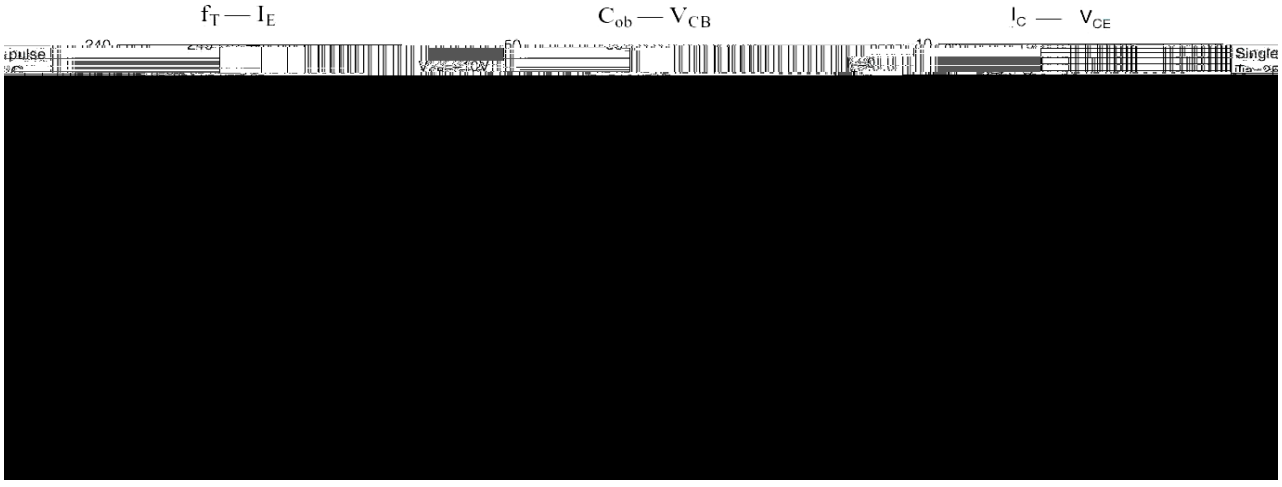
f_T — I_E
C_ob — V_CB
I_C — V_CE
pulse
Single

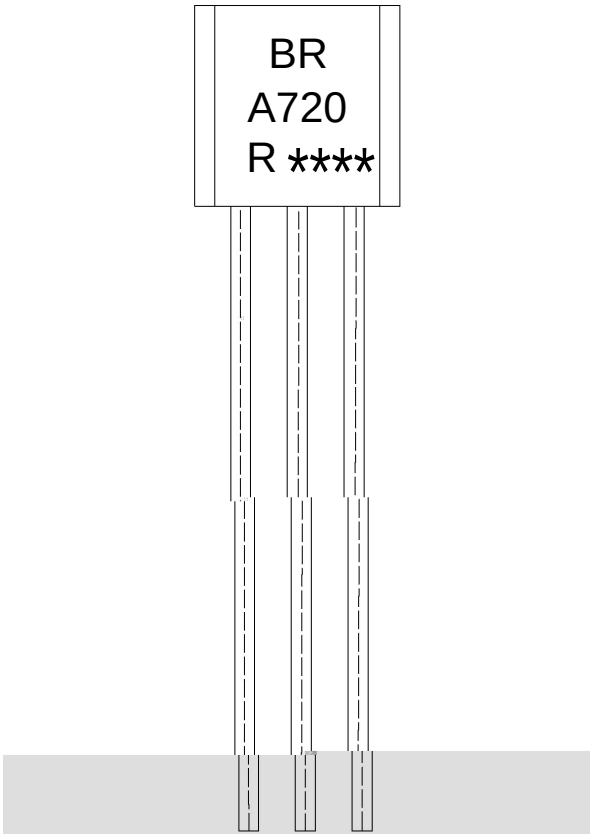

BR:


A720

R: h_{FE}

****

Note:

BR:	Company Code.
A720:	Product Type.
R:	h_{FE} Classifications Symbol
****:	Lot No. Code,code change with Lot No.

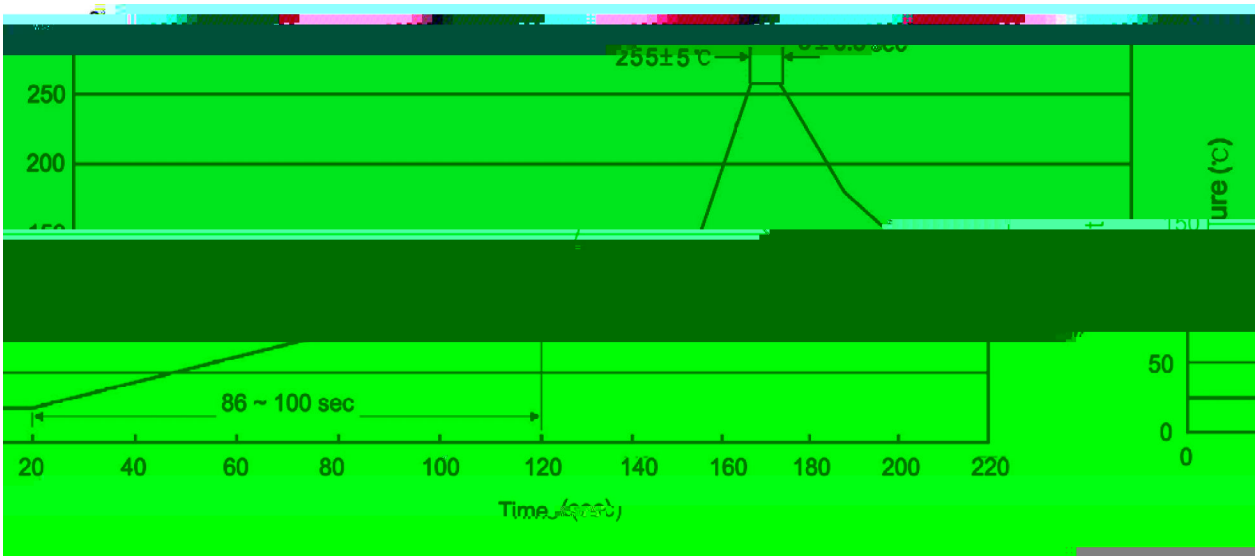

		Note:	
1	25 150 60 90sec;	1.Preheating:25~150 , Time:60~90sec.	
2	255±5 5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.	
3	2 10 /sec.	3. Cooling Speed: 2~10 /sec.	

270±5	10±1 sec.	Temp:270±5	Time:10±1 sec

/ BULK

Package Type	Units					Dimension		(unit mm3)
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375