/ Descriptions

Silicon PNP transistor in a TO-92LM Plastic Package.


/ Features

High collector dissipation, low saturation voltage, complementary pair with 2SC2060.

/ Applications

1 2W output circuits.

/ Equivalent Circuit



/ Pinning




PIN1 Base PIN 2 Collector PIN 3 Emitter

/ h_{FE} Classifications & Marking


h_{FE} Classifications Symbol	P	Q	R
h_{FE} Range	82~180	120~270	180~390

/ Package Dimensions

TO-92LM Unit: mm

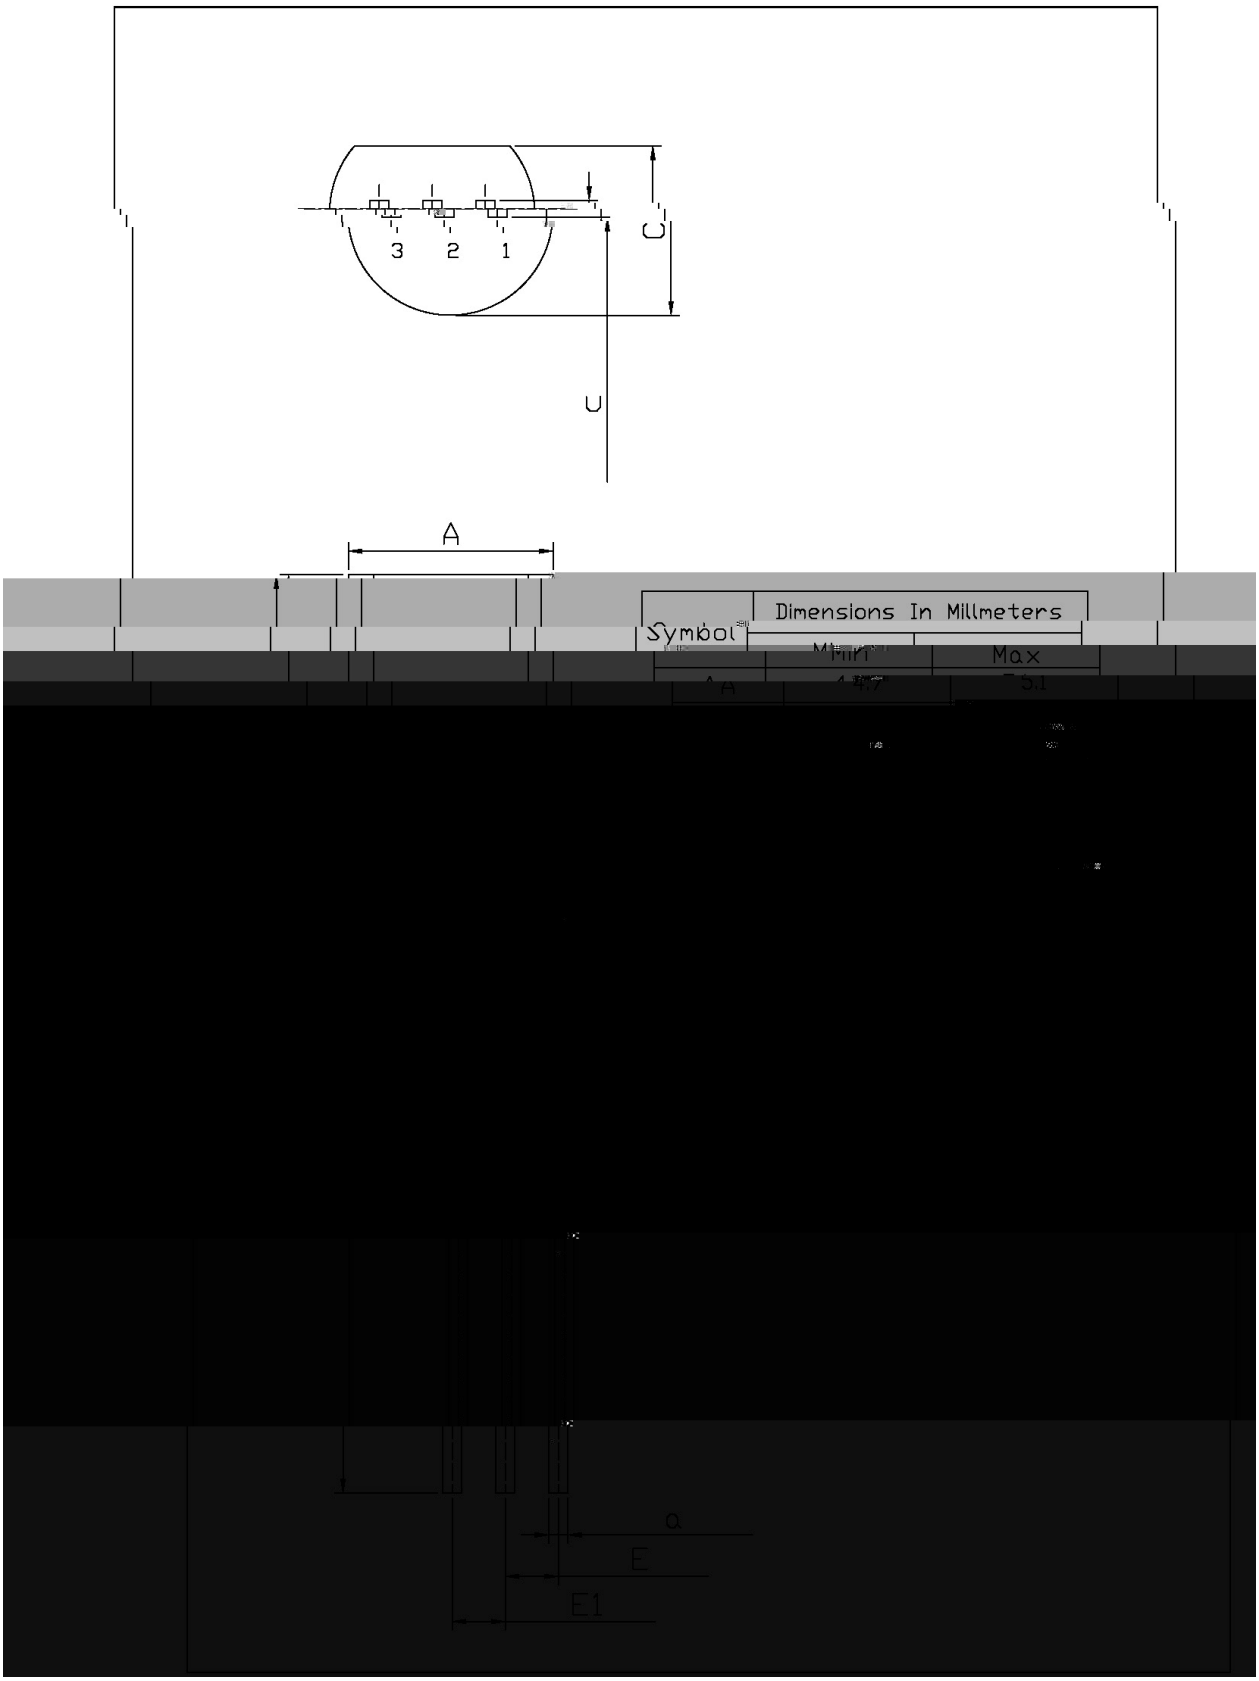


/ Marking Instructions

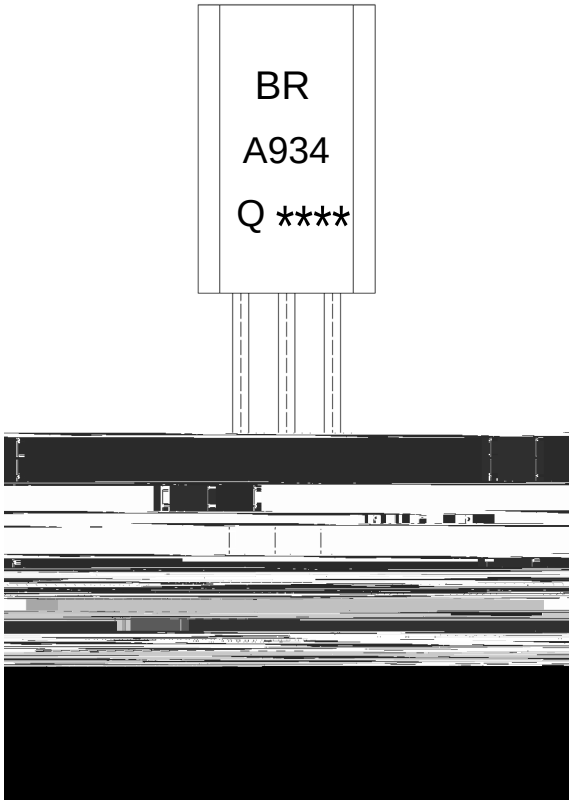

Note:

BR:	Company Code.
A934:	Product Type.
Q:	h_{FE} Classifications Symbol
****:	Lot No. Code,code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

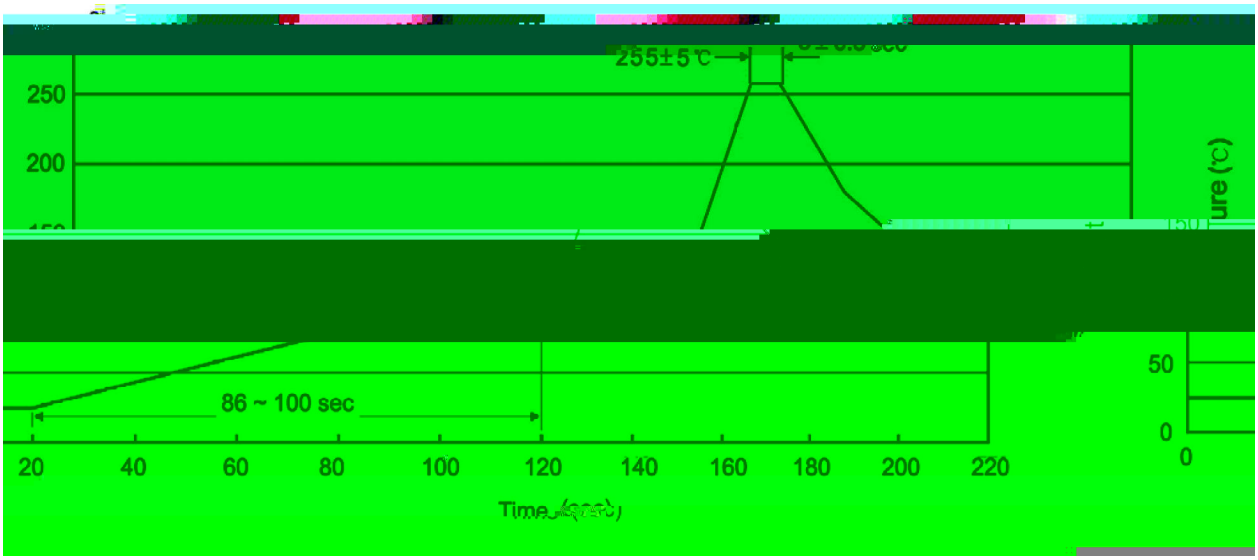

		Note:
1	25 150 60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255 5 5 0.5sec;	2.Peak Temp.:255 5 , Duration:5 0.5sec.
3	2 10 /sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270 5 10 1 sec. Temp.:270 5 Time:10 1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units	Dimension	(unit mm3)