/ Descriptions

TO-220F PNP Silicon PNP transistor in a TO-220F Plastic Package.

/ Features


2SC2073A

Complementary to 2SC2073A.


/ Applications

Power amplifier applications, vertical output applications.

/ Equivalent Circuit



/ Pinning




PIN1 Base PIN 2 Collector PIN 3 Emitter

/ h_{FE} Classifications & Marking


See Marking Instructions.

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-150	V
Collector to Emitter Voltage	V_{CEO}	-150	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-1.5	A
Base Current	I_B	-0.5	A
Collector Power Dissipation	P_C	2.0	W


/ Electrical Characteristic Curve

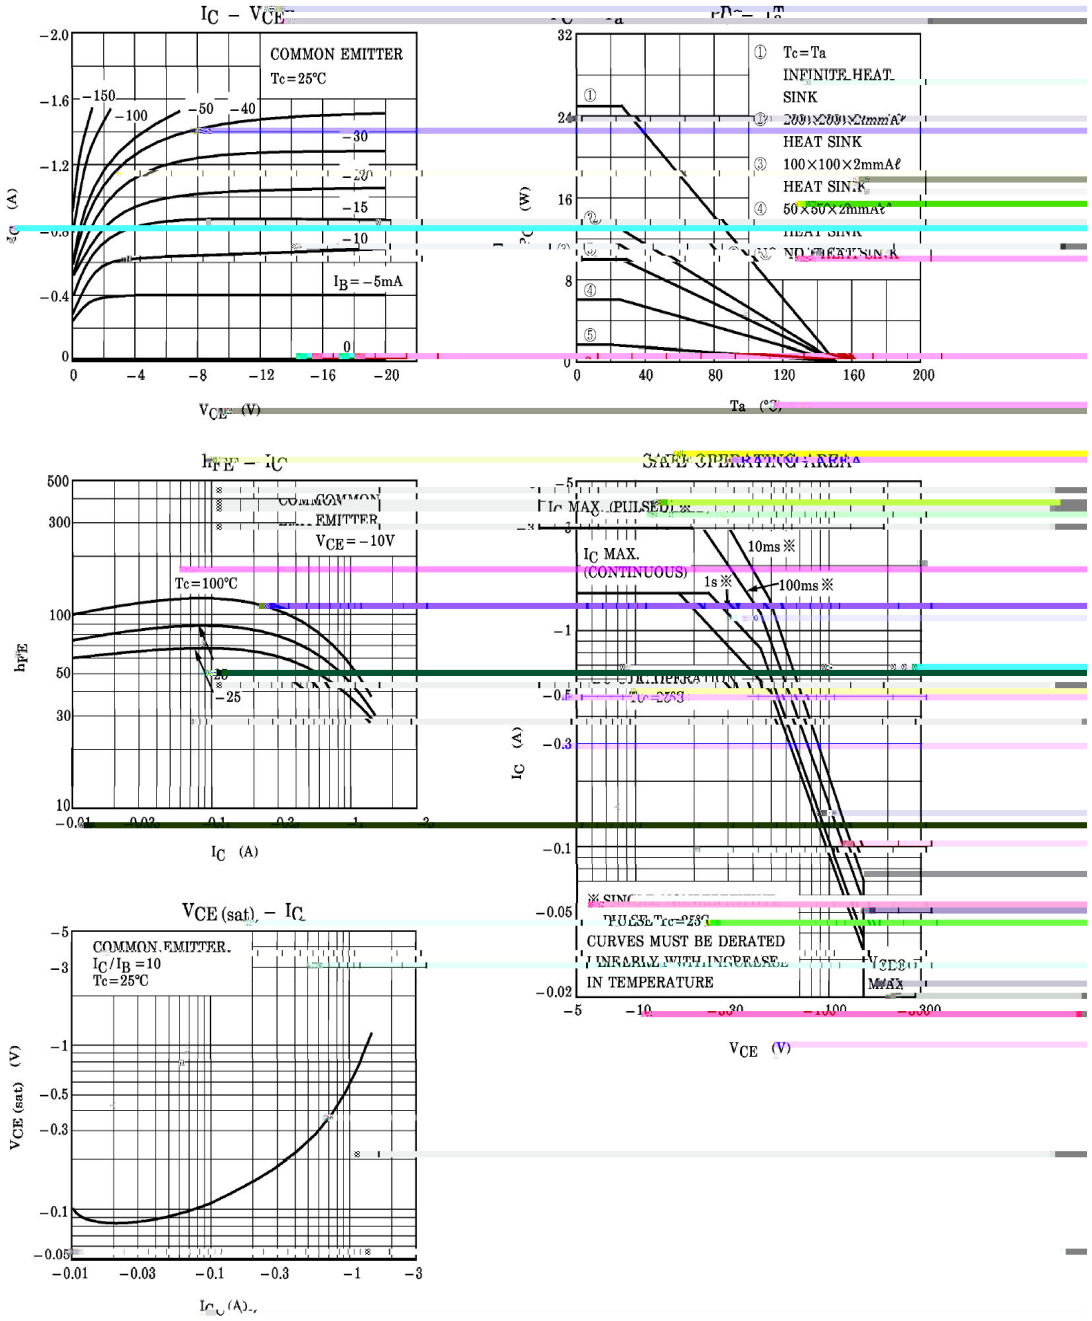

/ Package Dimensions

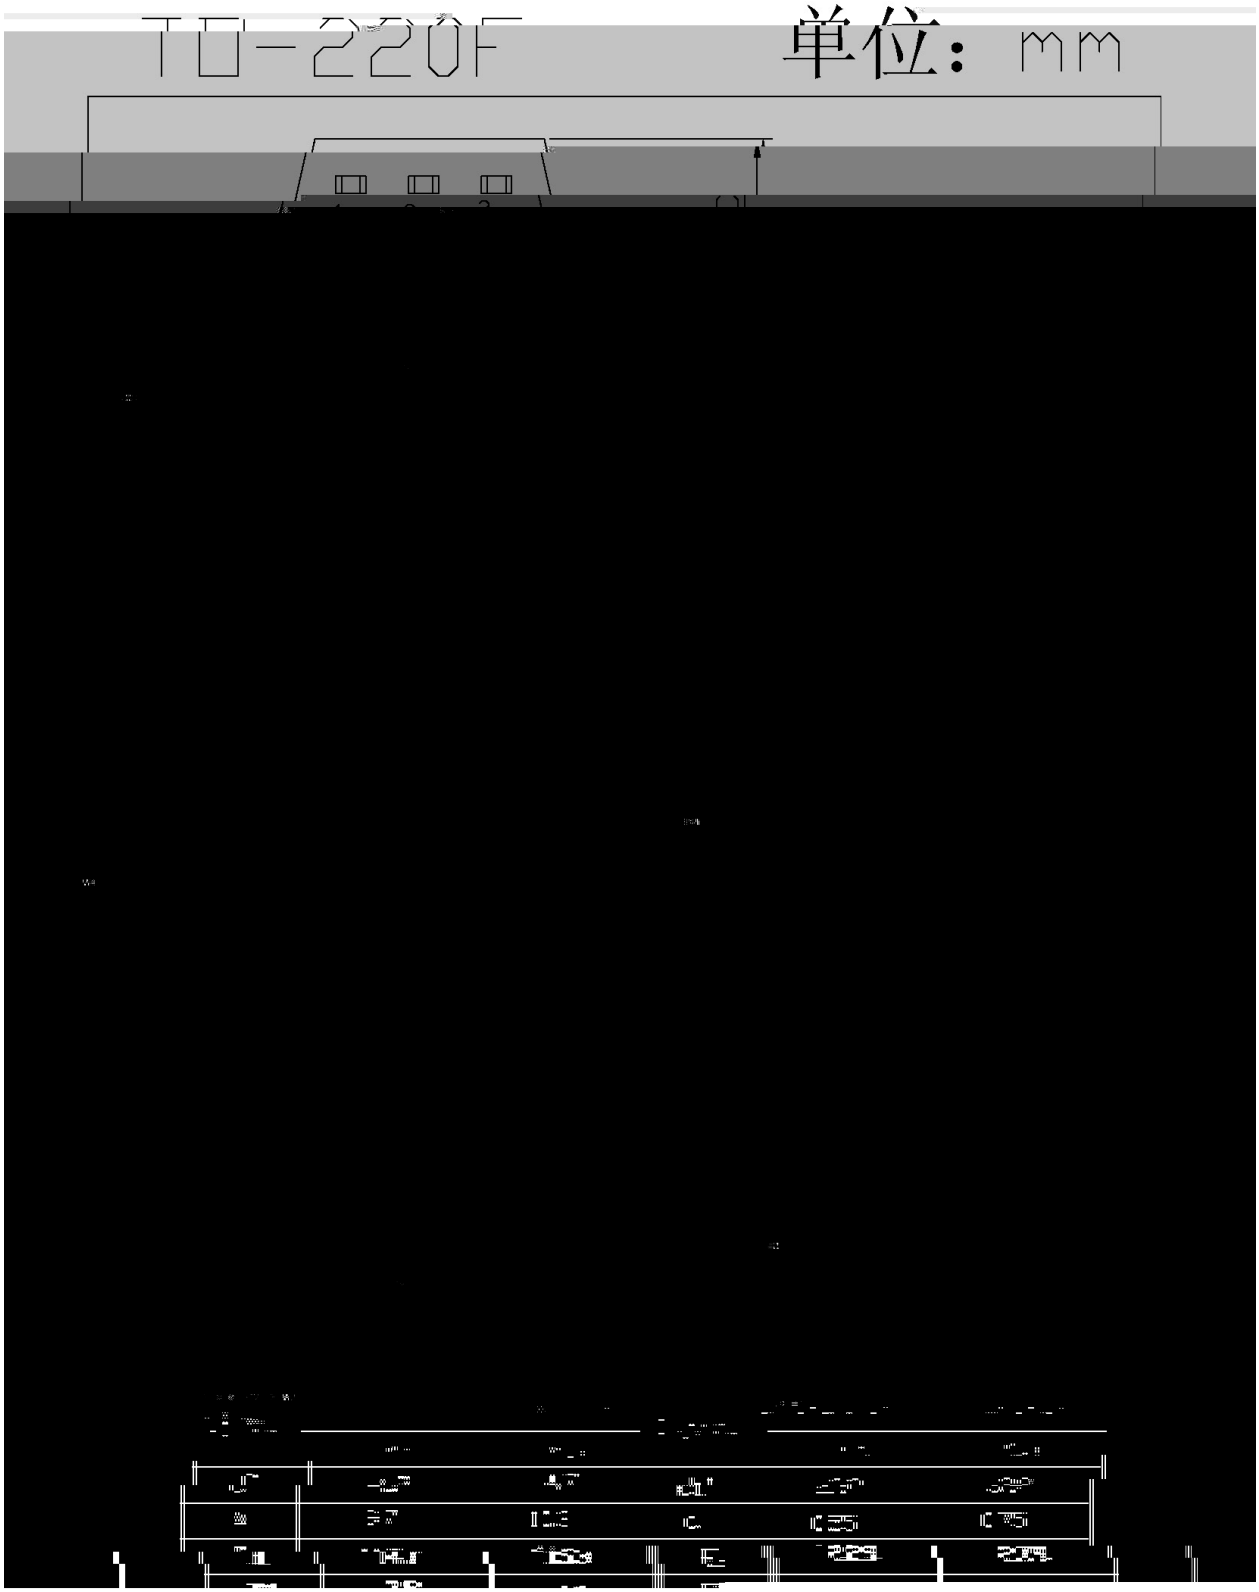

( ) / Temperature Profile for Dip Soldering(Pb-Free)

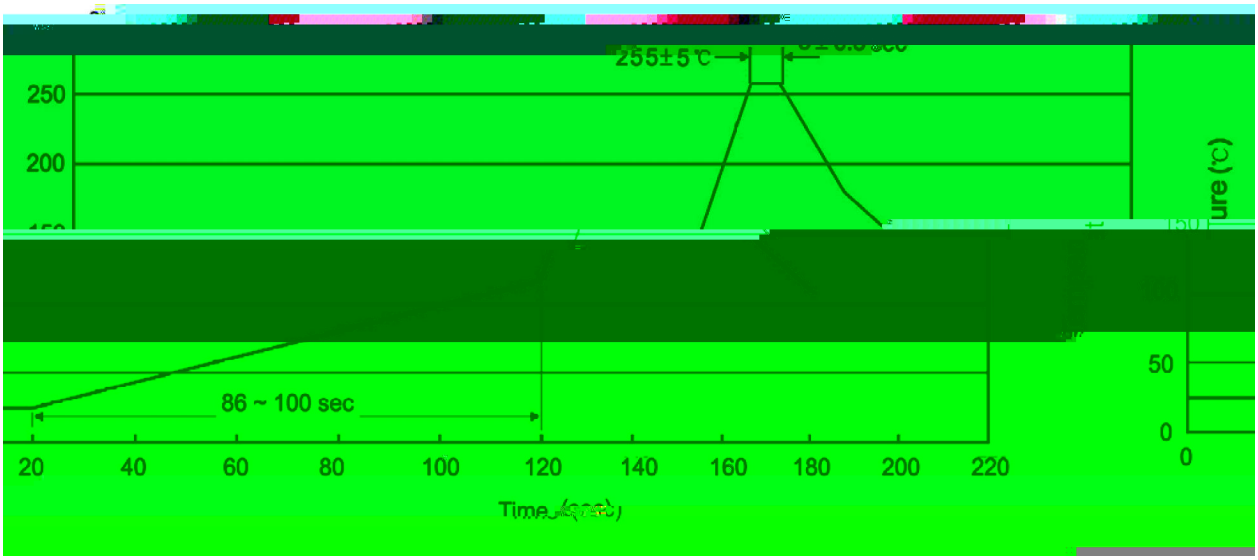

						Note:	
1		25	150		60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2		255±5				5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3				2	10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量				Dimension 包装尺寸 (unit: mm^3)
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	In	