2SB1424

Rev.E Mar.-2016

蓝箭电子 BLUE ROCKET ELECTRONICS

DATA SHEET

/ Descriptions

VRW0;< ṂṂ Ŀ SQS ÆṀ ч s ‖ ㄱ Silicon PNP transistor in a SOT-89 Plastic Package.

/ Features

ت ⊐ я ∪ Ӈ ı ‖ Ḅ [OBJ] ╚ ↄ ╚ ш ` ≠ ớ Ḅ


Low $V_{CE(sat)}$),excellent DC current gain characteristics.

/ Applications


ᵹ ˘ ѽ ᶻ

General purpose amplifier.

/ Equivalent Circuit



/ Pinning



PIN1 χ Base PIN 2 χ Collector PIN 3 χ Emitter

/ Marking


h_{FE} Classifications Symbol	Q	R
h_{FE} Range	120˙ 270	180˙ 390
Marking	HAEQ⁑	HAER⁑


v ˝Ω Parameter	٩ N Symbol	˝Ω Ö Rating	D Ч Unit
Collector to Base Voltage	V_{CBO}	-20	V
Collector to Emitter Voltage	V_{CEO}	-20	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current-Continuous	I_C	-3.0	A
Collector Current -Continuous(Pulse)	I_{CP}	-5.0	A
Collector Power Dissipation	P_C	0.6	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55˙ 150	


v ˝Ω Parameter	٩ N Symbol	╩ :ϯ ţ Test Conditions	ω ņ Ö Min	Ɛ ʒ Ö Typ	ω ᶻ Ö Max	D Ч Unit
Collector to Base Breakdown Voltage	V_{CBO}	I_C=-50μA I_E=0	-20			V
Collector to Emitter Breakdown Voltage	V_{CEO}	I_C=-1.0mA I_B=0	-20			V
Emitter to Base Breakdown Voltage	V_{EBO}	I_E=-50μA I_C=0	-6.0			V
Collector Cut-Off Current	I_{CBO}	V_{CB}=-20V I_E=0			-0.1	μA
Emitter Base Cut-Off Current	I_{EBO}	V_{EB}=-5.0V I_C=0			-0.1	μA
DC Current Gain	k_{IH}	V_{CE}=-2.0V I_C=-0.1A	120		390	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=-2.0A I_B=-0.1A			-0.5	V
Transition Frequency	i_W	V_{CE}=-2.0V I_C=-0.5A f=100MHz		240		MHz

Collector


/ Electrical Characteristic Curve

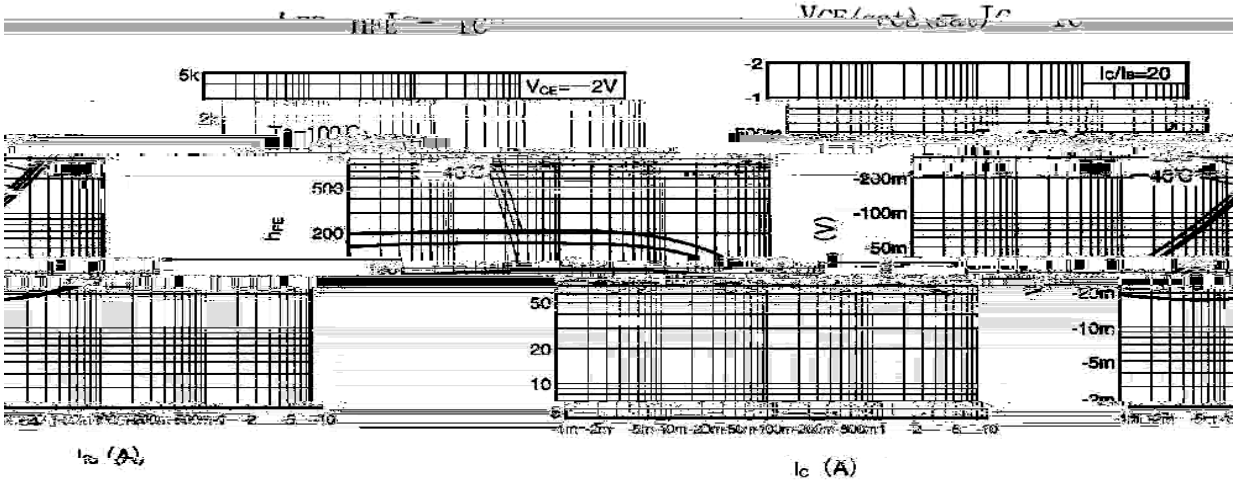

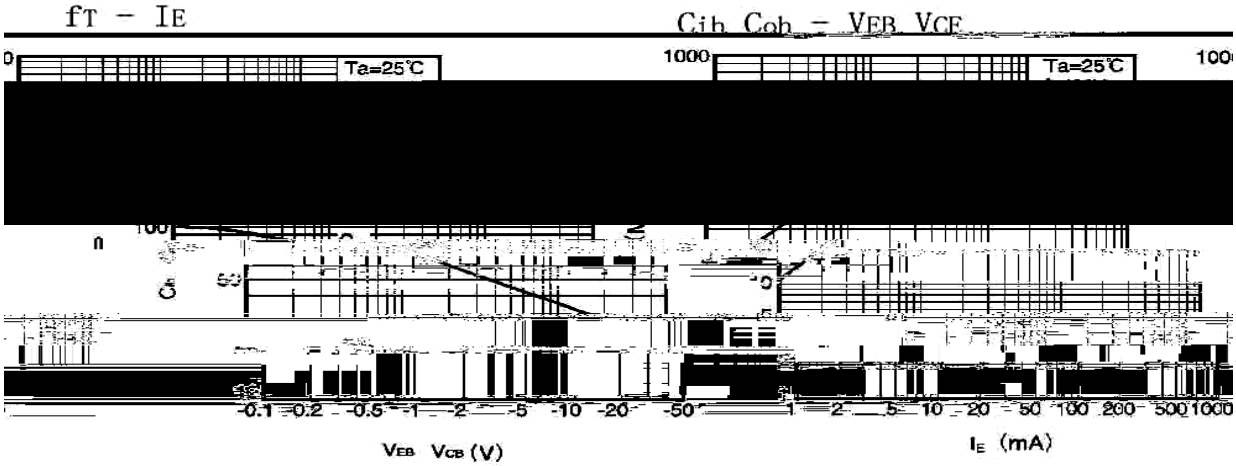

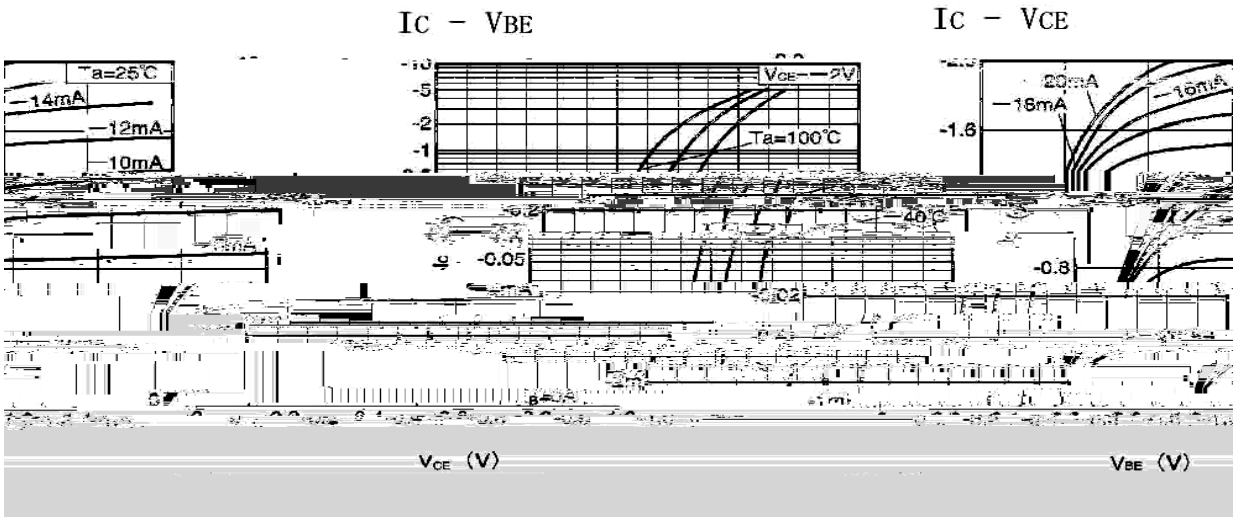

/ Package Dimensions

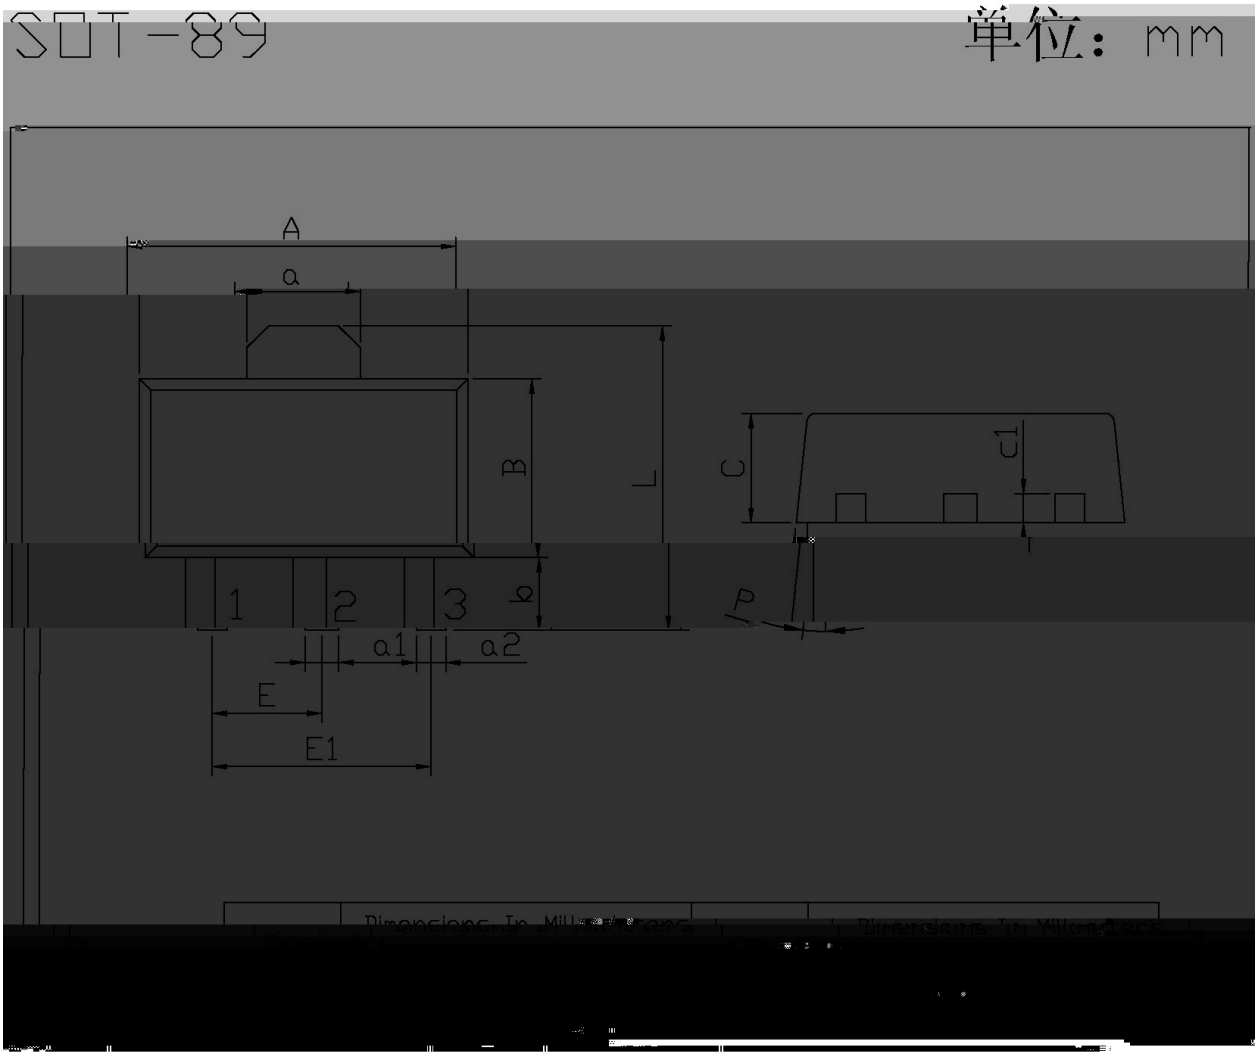



/ Marking Instructions



ب ˝ χ

H χ ѭ ϗ и Ґ

AE χ ѭ ϳ N Ґ

Q: ѭ h_{FE} ‘ 6 Ґ

-- χ ѭ ı ғ ӈ̈ N Ґ ı ֏ ı ғ ӈ̈ N Ψ ק

Note:


H: Company Code.

AE: Product Type.

Q: h_{FE} Classifications Symbol

**: Lot No. Code, code change with Lot No.

( ) /

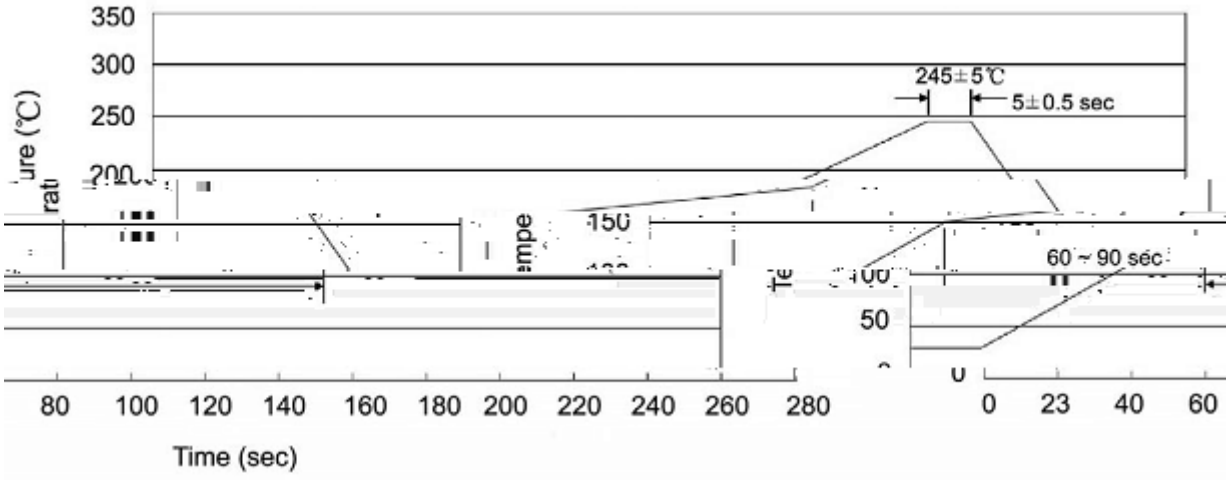

ب ˝ χ

1 Ĺ ♬ □ ỷ 25 Ḱ 150 ł ı ˋH ڑ 60 Ḱ 90sec;

2 Š Ө □ ỷ 245 ° 5 ł ı ˋH ڑ ˋY ㅅ ㎛ 5 ° 0.5sec;

3 ì ˙ ㅓ ˛ ɔ ෯ ỷ ㎛ 2 Ḱ 10 ł /sec.

Note:

1.Preheating:25~150 ł , Time:60~90sec.

2.Peak Temp.:245 ° 5 ł , Duration:5 ° 0.5sec.

3. Cooling Speed: 2~10 ł /sec.

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ 260 ° 5 ł ˋH ڑ χ 10 ° 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

ɔ ` ㅛ Ł / REEL

Package Type	Units					Dimension		(unit mm^3)
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	8	56,000	7 ρ ×12	180×120×180	385×257×392

/ Notices