
Silicon NPN transistor in a SOT-323 Plastic Package.

High h_{FE} and V_{CEO}




ώ ̈ Ξ ̃Ạ / Absolute Maximum Ratings(Ta=25 ɹ)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	60	V
Collector to Emitter Voltage	V_{CEO}	50	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	100	mA
Collector Power Dissipation	P_C	150	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


≠ ∧ Ξ ̃Ạ / Electrical Characteristics(Ta=25 ɹ)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	V_{CB}=60V I_E=0			0.1	μA
Emitter Base Cut-Off Current	I_{EBO}	V_{EB}=5.0V I_C=0			0.1	μA
DC Current Gain	h_{FE}	V_{CE}=6.0V I_C=1.0mA	90	200	600	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=100mA I_B=10mA		0.15	0.3	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	I_C=100mA I_B=10mA		0.86	1.0	V
Base to Emitter Voltage	V_{BE}	V_{CE}=6.0V I_C=1.0mA	0.55	0.62	0.65	V
Transition Frequency	f_T	V_{CE}=6.0V I_C=10mA		250		MHz
Collector Output Capacitance	C_{ob}	V_{CB}=6.0V I_E=0 f=1.0MHz		3.0		pF


≠ Ǝ ÃˊE ᛋ ƒ / Electrical Characteristic Curve

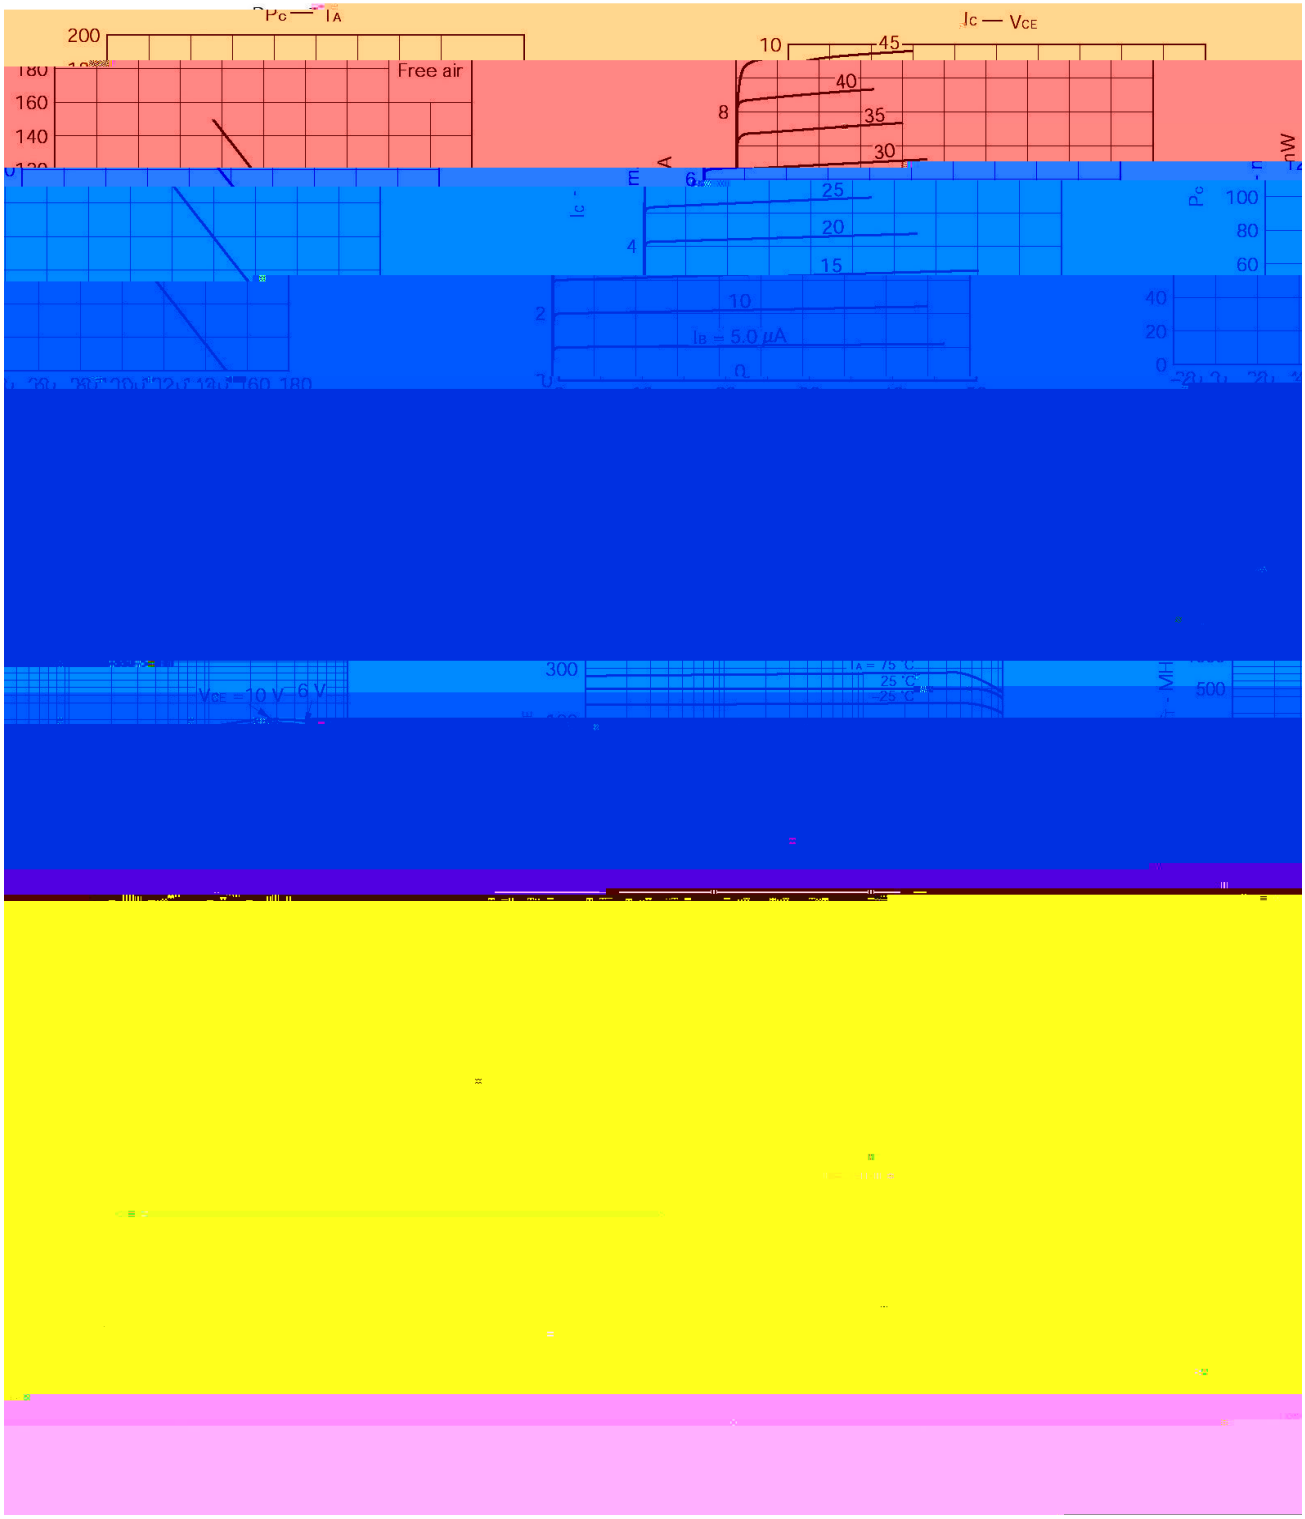

ᵘ ĖÒĻ ʃ / Package Dimensions

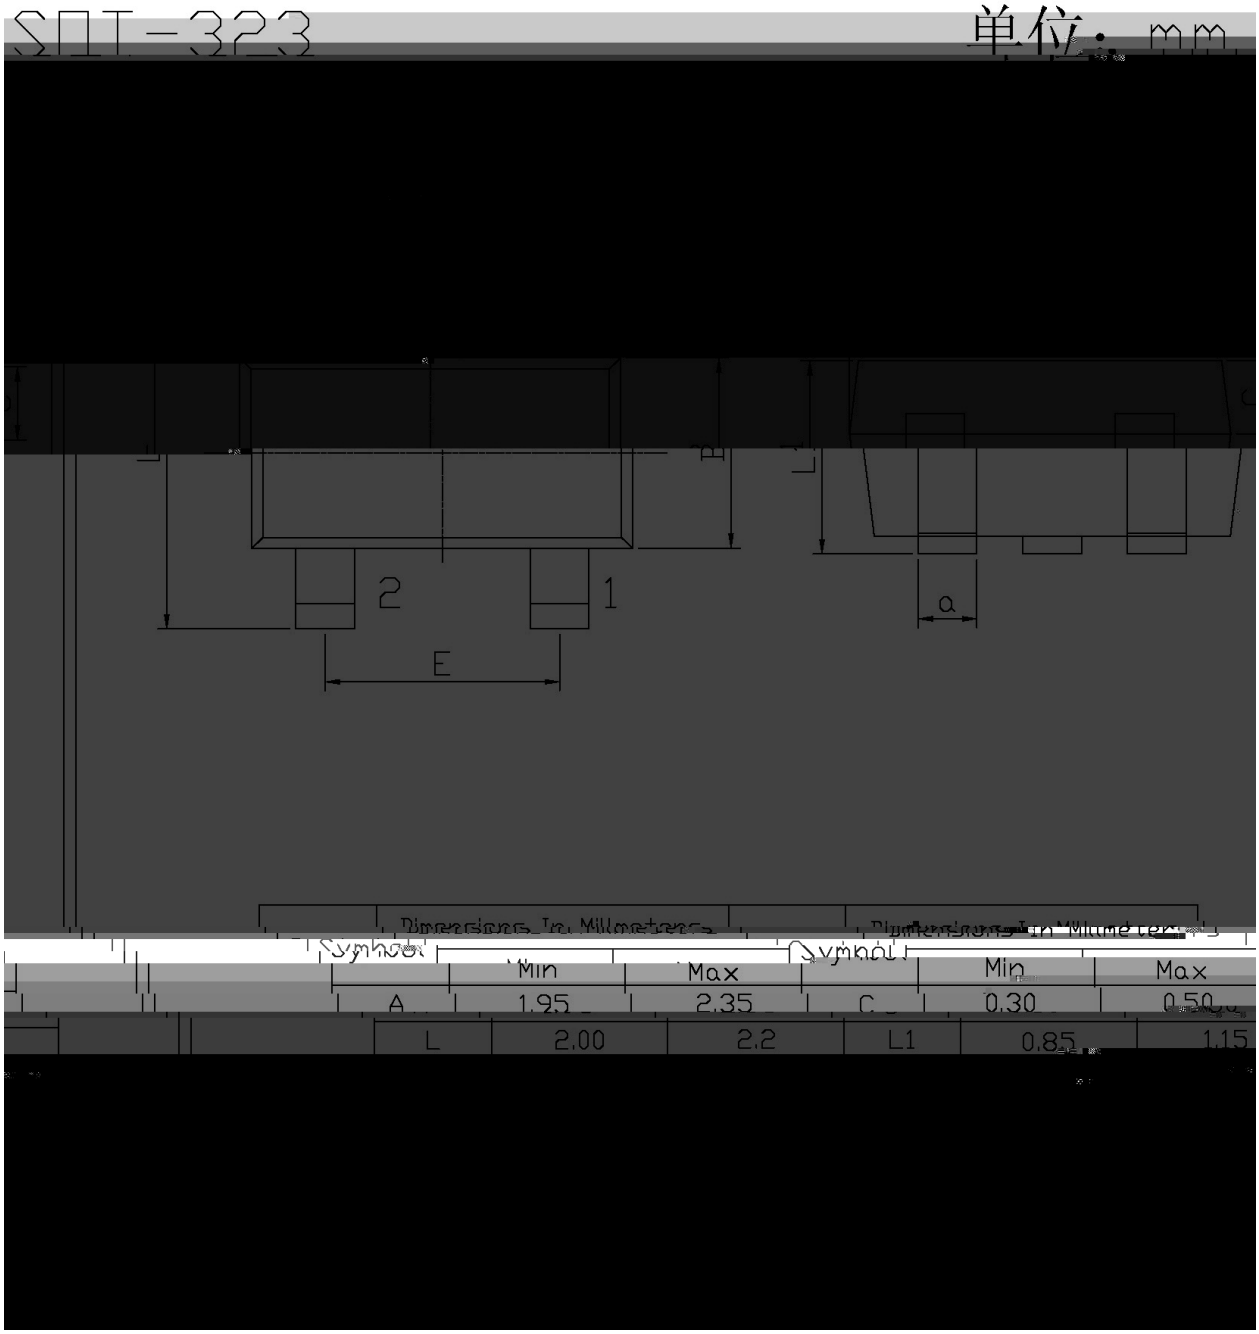

Ł. Ł'Ω / Marking Instructions

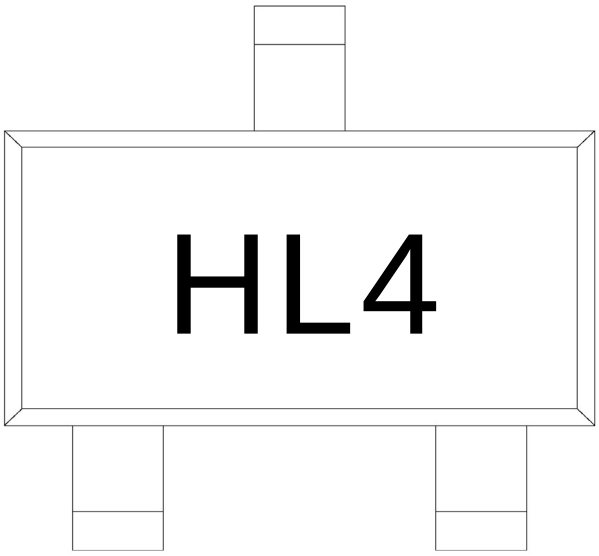

H


L4

Note:

H: Company Code.

L4: Product Type.

ѭ ʃ ╕ ẘ ´E ⅵ ƒ (ᾠ ƺ) / Wh p shudwxuh Suriloh iru LU Uhior z Vroghulq j+Se0luhh,

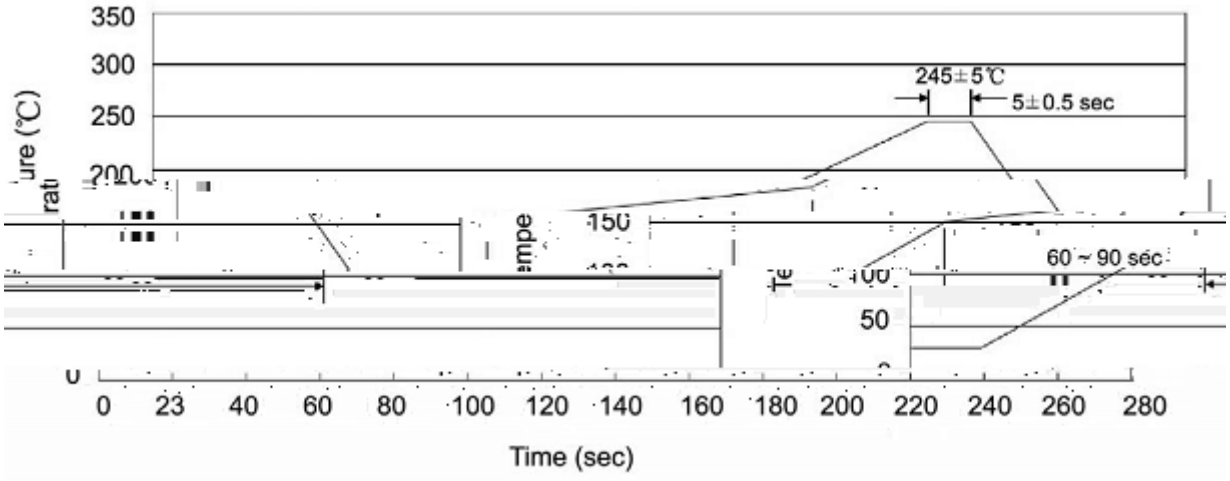

Note:

1		25	150		60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2		245	5			5 0.5sec;	2.Peak Temp.:245 5 , Duration:5 0.5sec.
3				2	10	/sec.	3. Cooling Speed: 2~10 /sec.

ⅎ ü q ¯ ˋY Ţ / Resistance to Soldering Heat Test Conditions

260 5	10 1 sec.	Temp.:260±5	Time:10±1 sec	

ɒ Ŀ ≮— / Packaging SPEC.

/ REEL

Package Type	Units					Dimension		(unit mm^3)
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

ä ⅴ ŗ Ω / Notices