2SC2632

蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

TO-92LM NPN

-

2SA1124


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


		μ				
						μ
		Ω				

/ Electrical Characteristic Curve


P_C — Ta

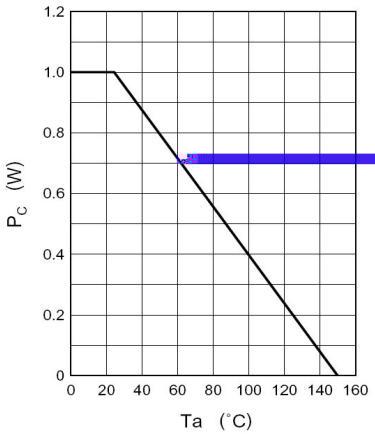


I_C — V_{BE}

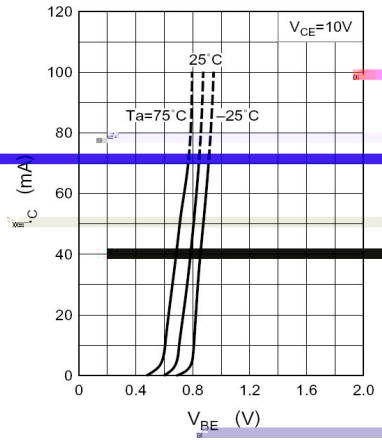


$V_{CE(sat)}$ — I_C

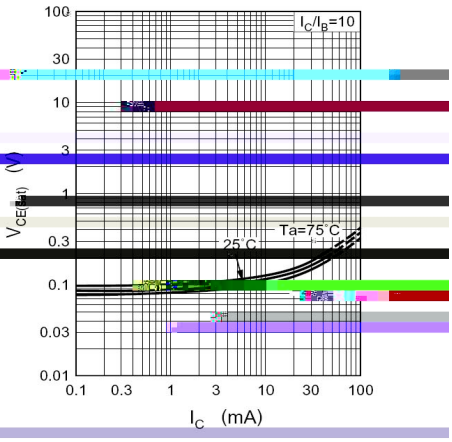


h_{FE} — I_C

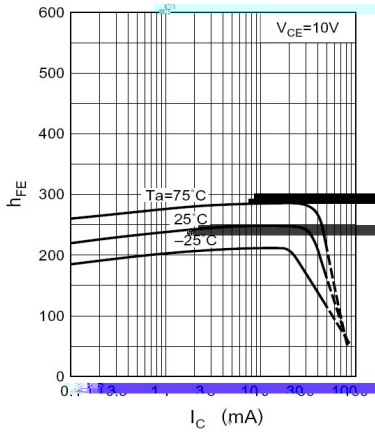

f_T — I_E

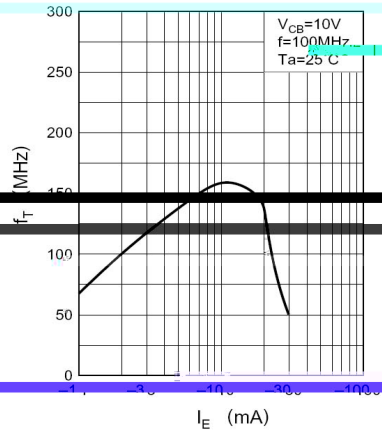


C_{ob} — V_{CB}

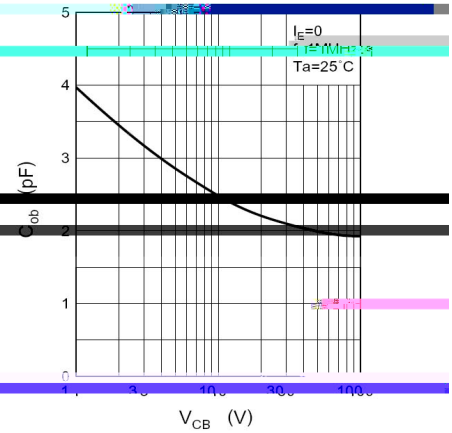


/ Package Dimensions

TO-92LM Unit: mm

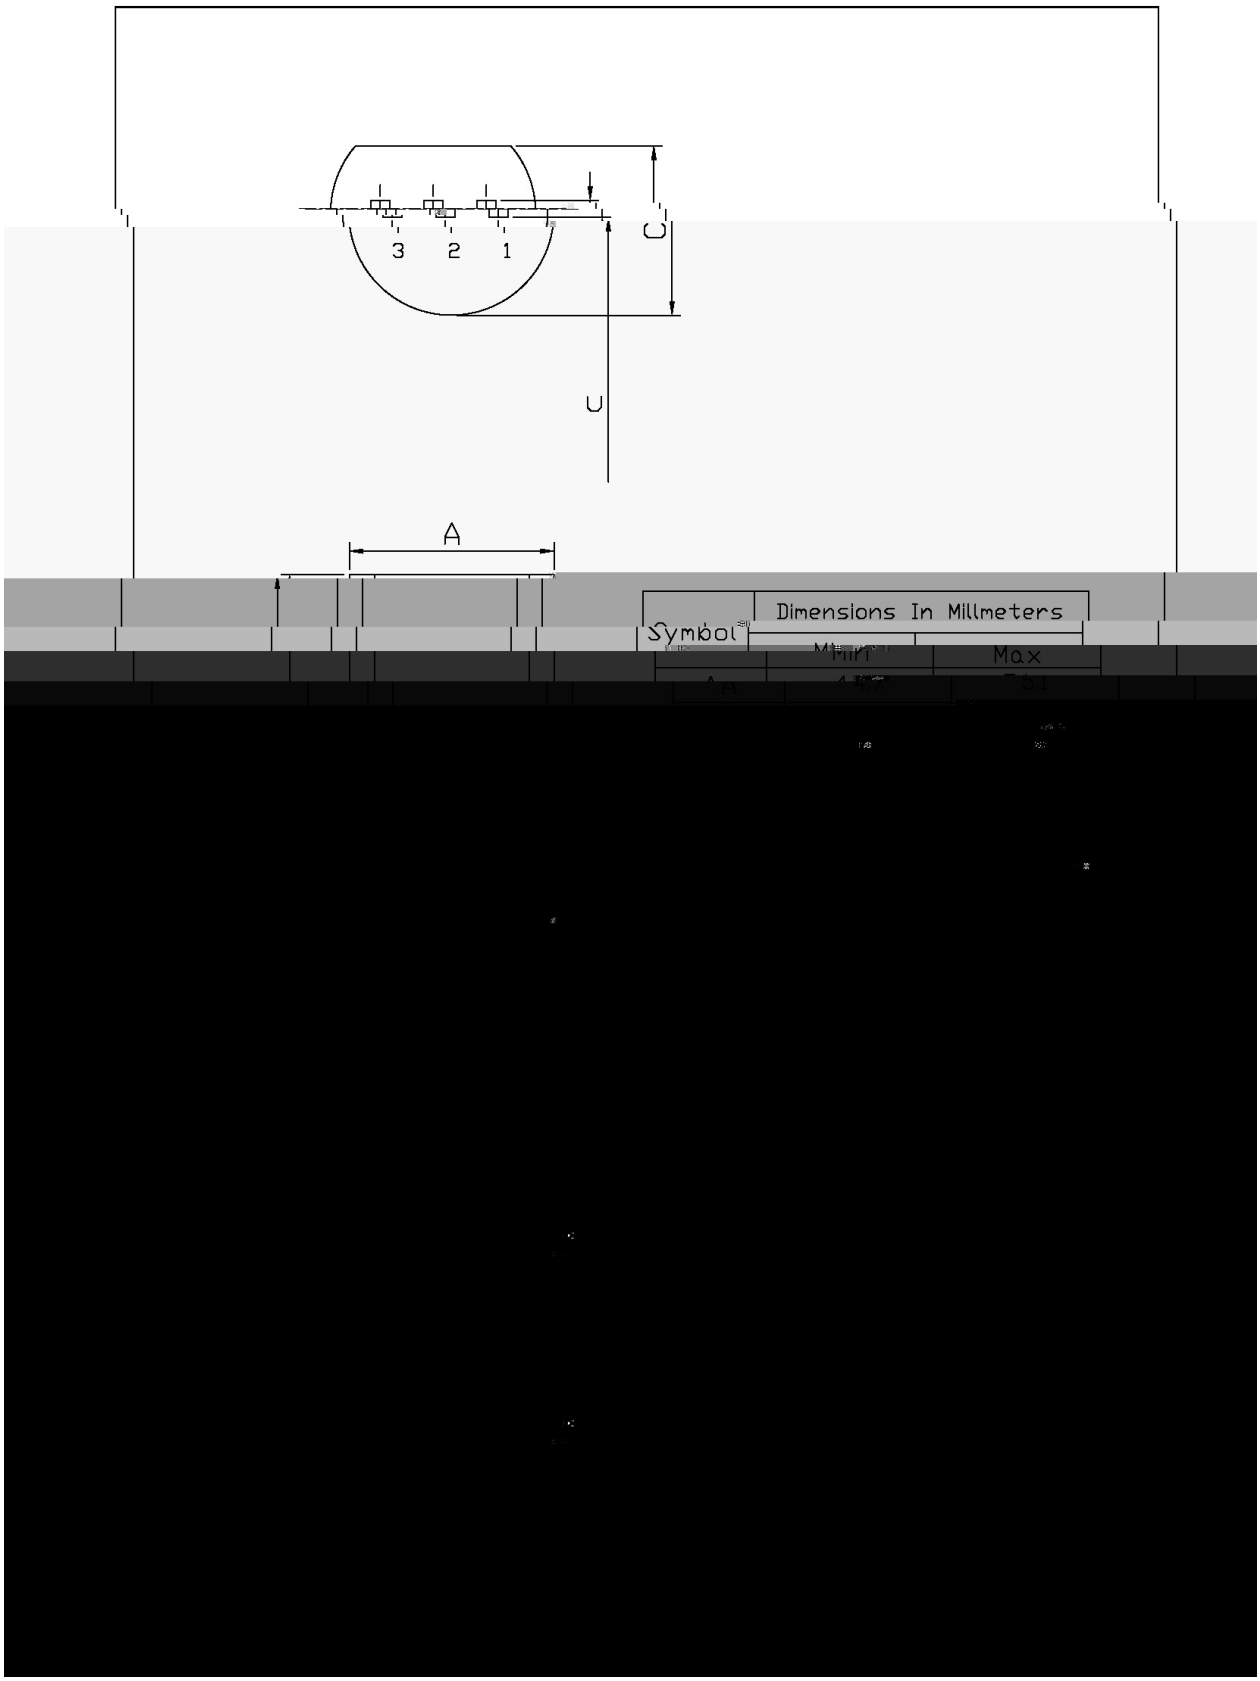

/ Marking Instructions

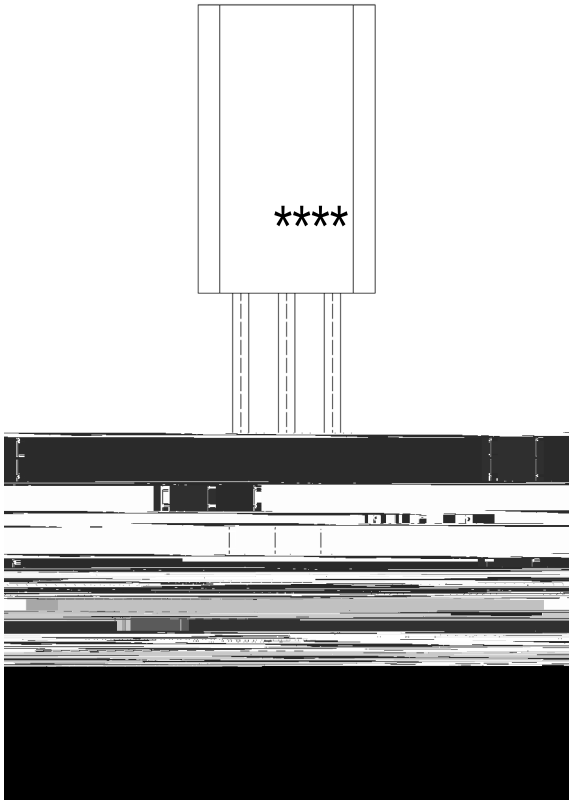


BR:

C2632

R: h_{FE}

****

( ) / Temperature Profile for Dip Soldering(Pb-Free)

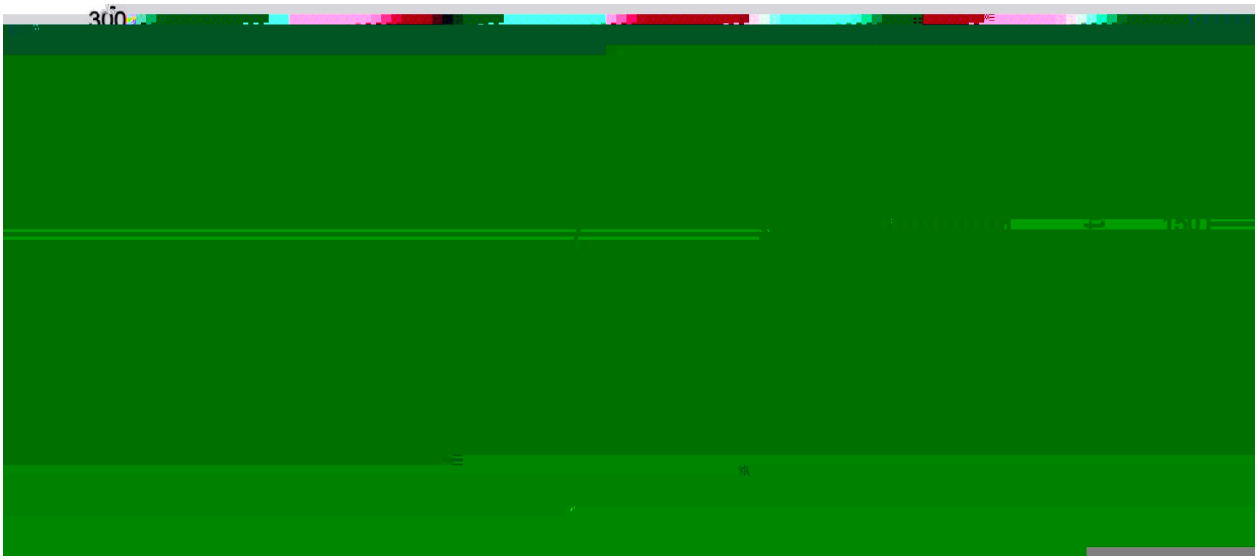

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92LM	1,000	8	8,000	5	40,000	135×190	237×172×102	560×245×195

	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92LM	2,500	1	100	10	25,000	328×230×42	480×346×235 547×407×268

/ Notices