
TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

P_C I_C h_{FE} 9012

High P_C and I_C, excellent h_{FE} linearity, complementary pair with 9012.

Amplifier of portable radios in class B push-pull operation.







PIN1 Collector PIN 2 Base PIN 3 Emitter


h_{FE} Classifications Symbol	D	E	F	G	H	I
h_{FE} Range	64~91	78~112	96~135	112~166	144~202	188~276

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	20	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	500	mA
Base Current - Continuous	I_B	100	mA
Collector Power Dissipation	P_C	625	mW



TO-92 Unit: mm

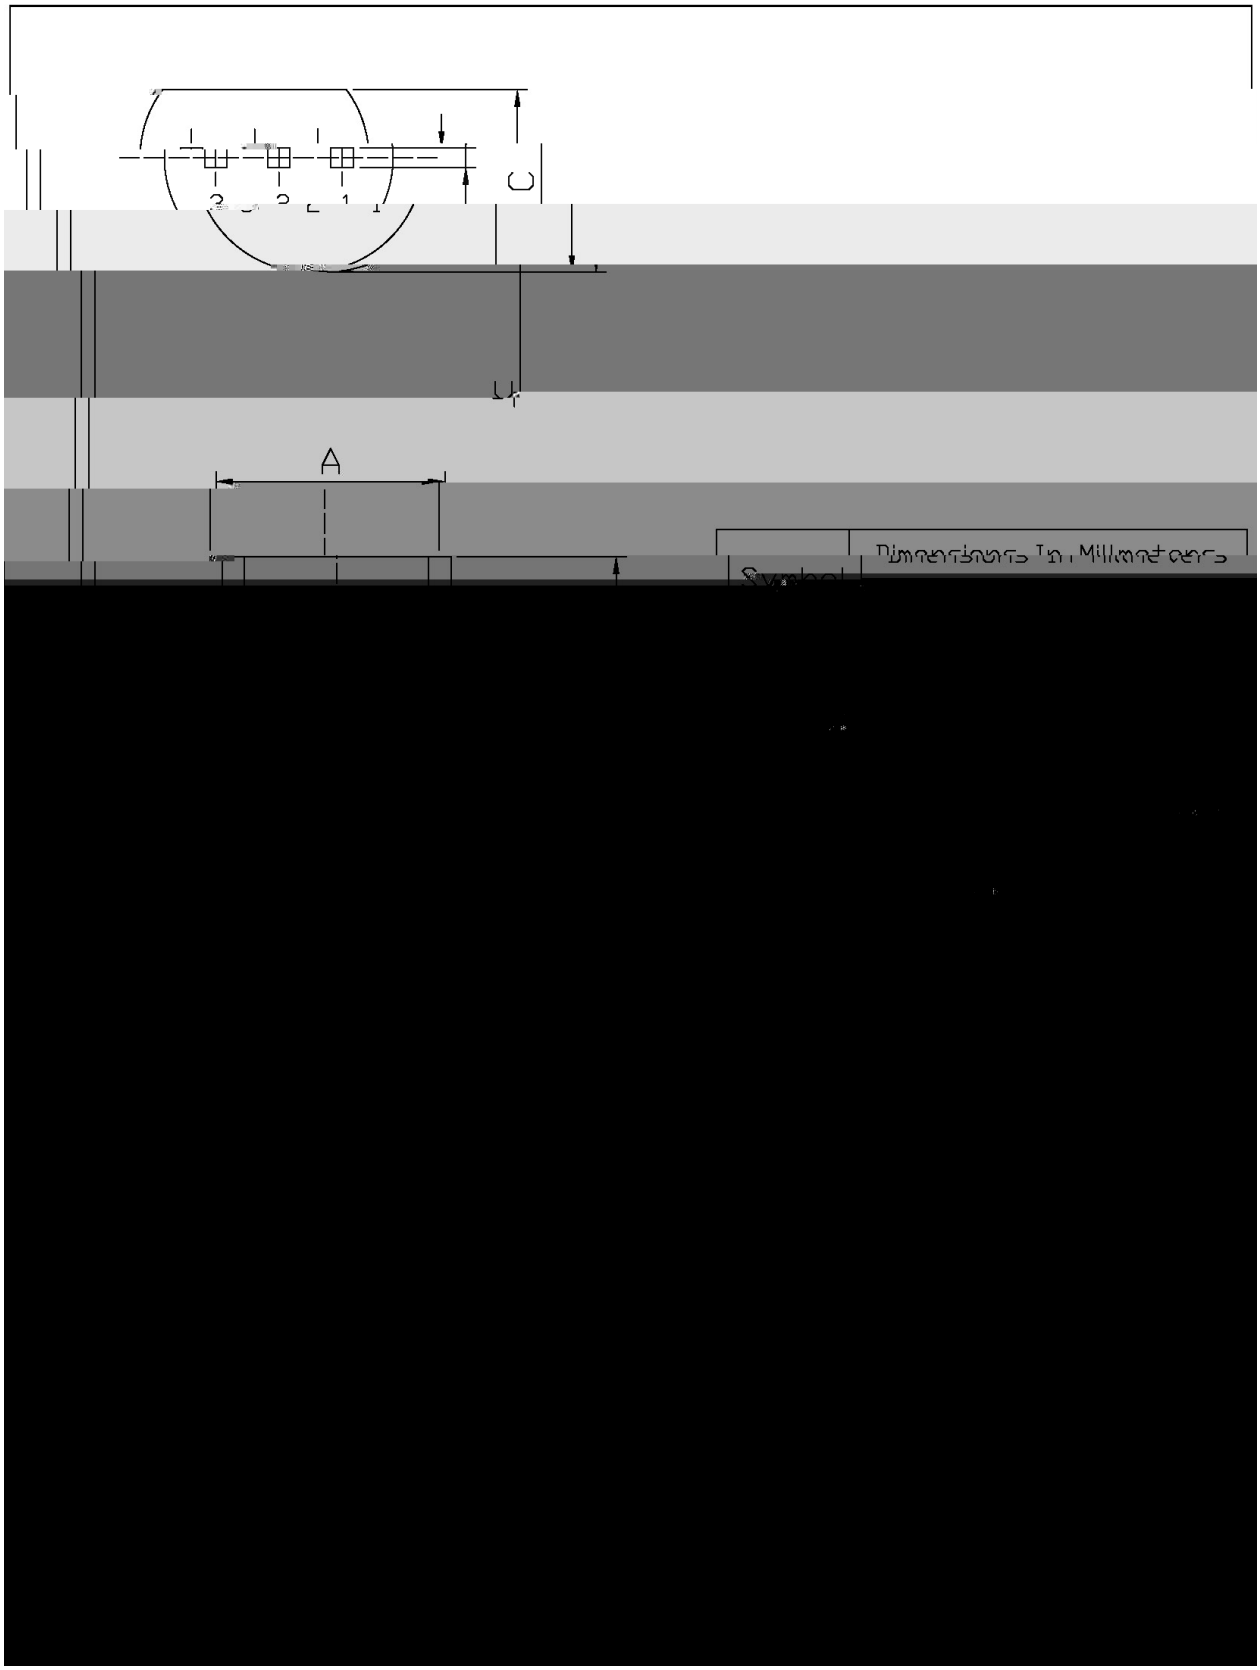

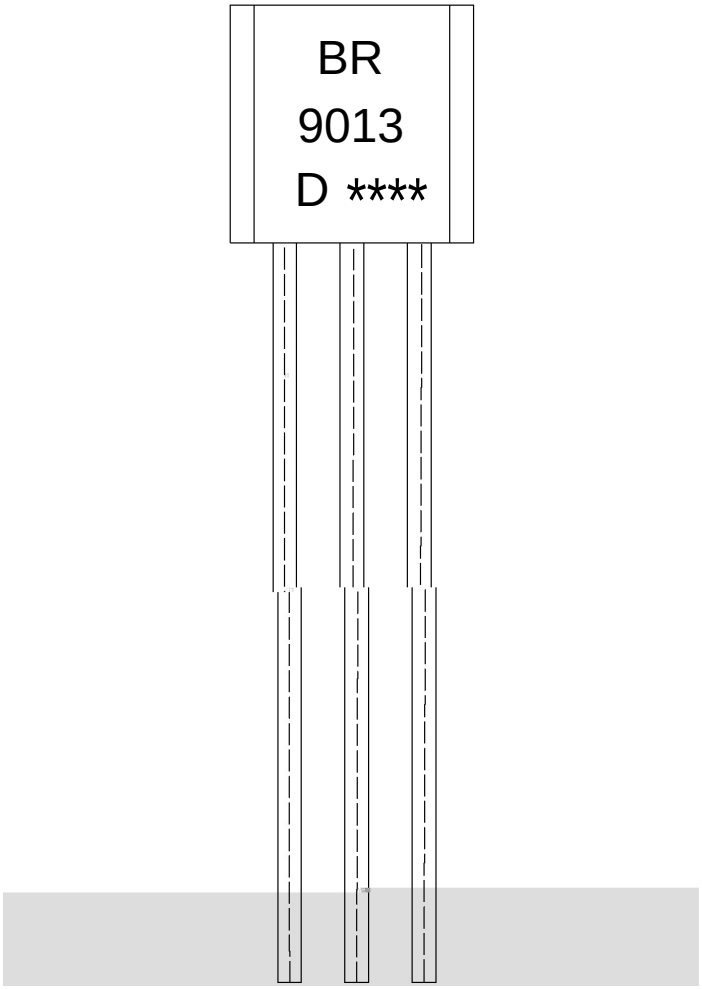

BR

9013

D: h_{FE}

****


Note:

BR: Company Code.

9013: Product Type.

D: h_{FE} Classifications Symbol.

****: Lot No. Code, code change with Lot No.

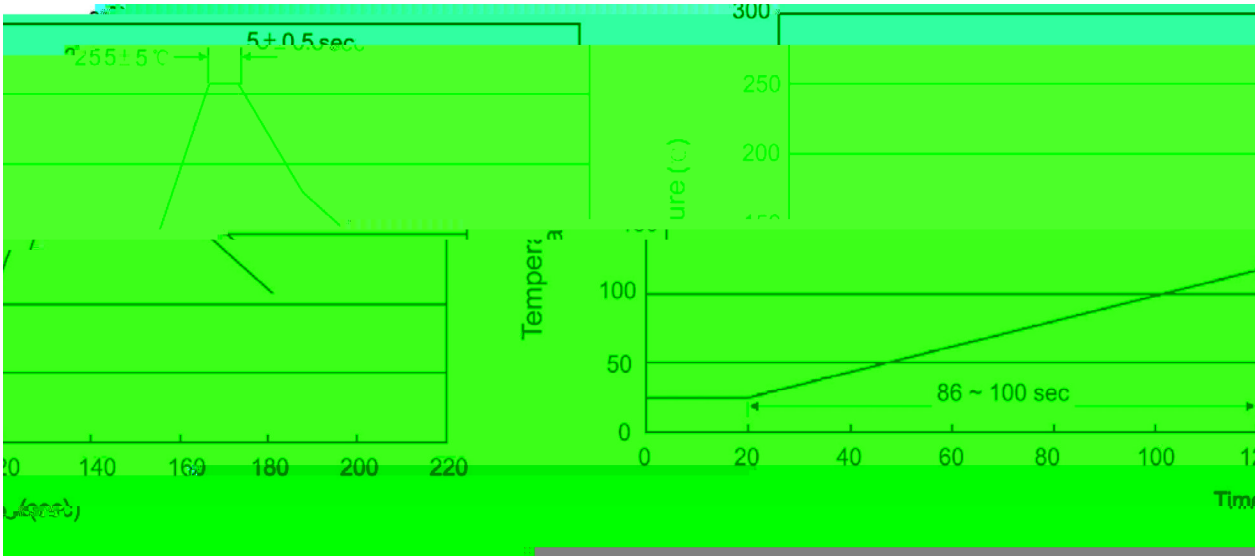

						Note:	
1		25	150		60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2		255±5				5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3				2	10	/sec.	3. Cooling Speed: 2~10 /sec.

270±5	10±1 sec.	Temp.:270±5