
SOT-89 PNP Silicon PNP transistor in a SOT-89 Plastic Package.

High current, low voltage, HF Product.


Driver stages of audio and video amplifiers.


/ Equivalent Circuit




Parameter	Symbol	Rating

/ Electrical Characteristic Curve

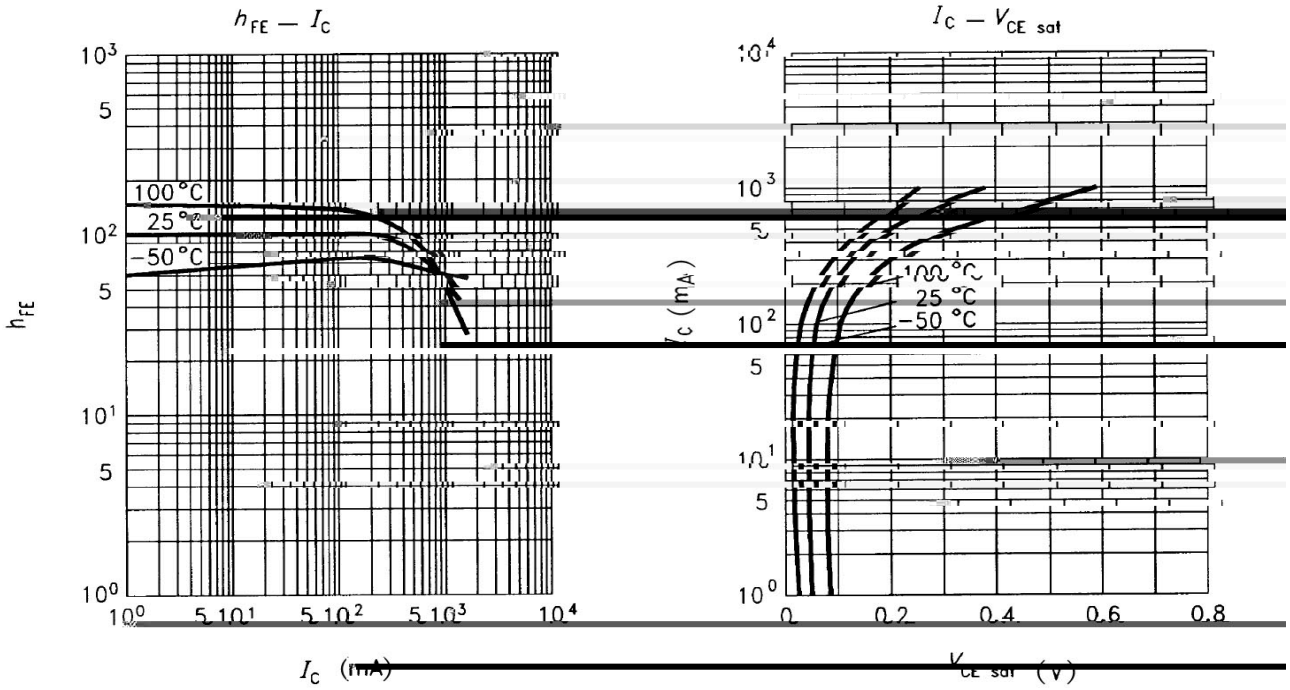


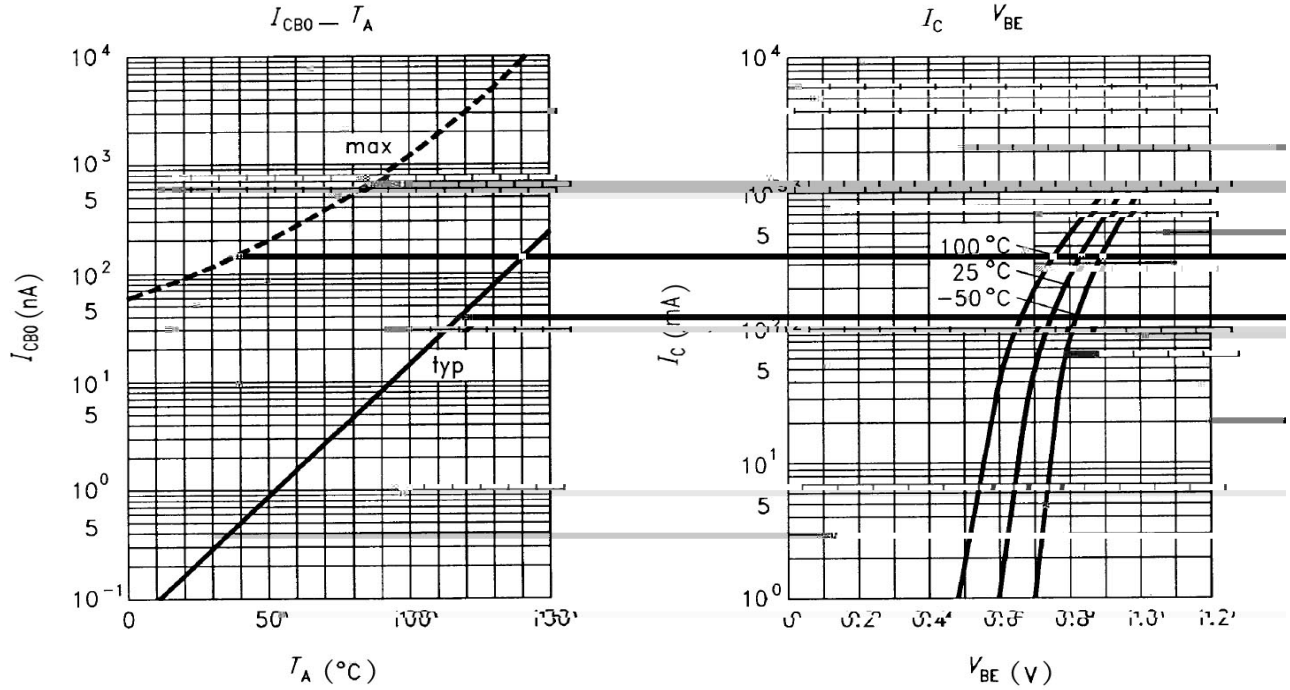

/ Package Dimensions

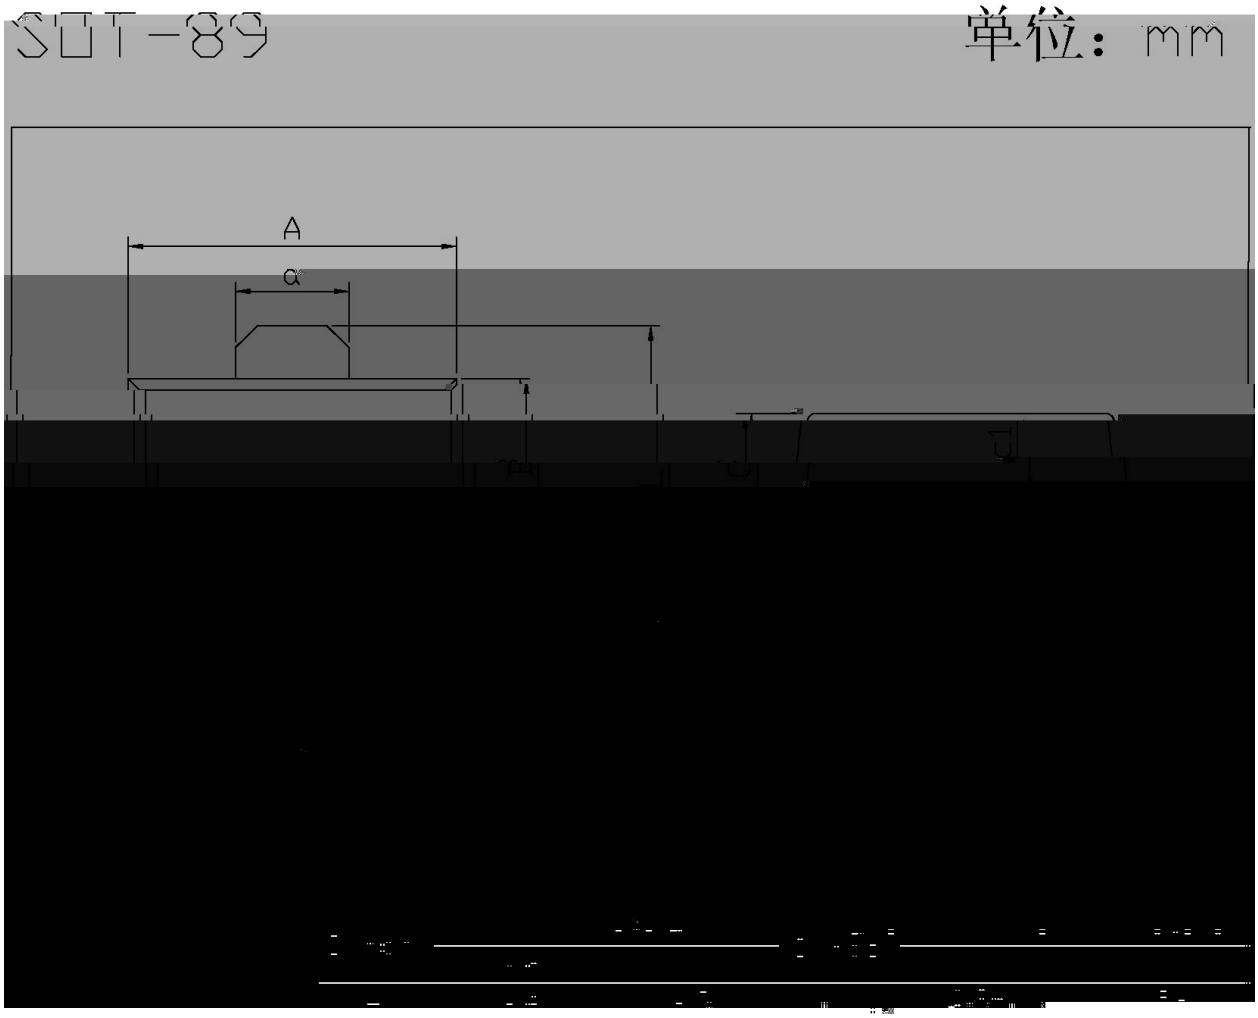

/ Marking Instructions

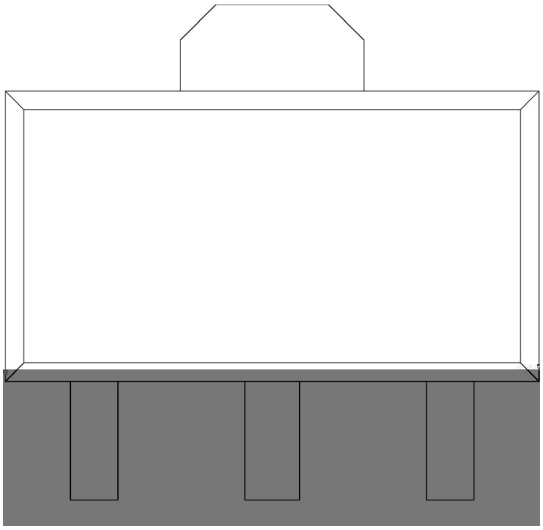

H

AK

**

Note:

H: Company Code

AK: Product Type Code

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

		Note:
1	150 180 60 90sec;	1.Preheating:150~180 , Time:60~90sec.
2	245±5 5±0.5sec;	2.Peak Temp.:245±5 , Duration:5±0.5sec.
3	2 10 /sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units	Dimension	(unit mm³)