TO-92 NPN ilicon NPN transistor in a TO-9

,

High breakge, complementary pair with BF423.


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	250	V
Collector to Emitter Voltage	V_{CEO}	250	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	50	mA
Peak Collector Current	I_{CM}	100	mA
Collector Power Dissipation	P_C	830	mW
Peak Base Current	I_{BM}	50	mA
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-off Current	I_{CBO}	V_{CB}=200V I_E=0			0.01	μA
C Emitter Cut-off Current	I_{EBO}	V_{EB}=5.0V I_C=0			0.05	μA
DC Current Gain	h_{FE}	V_{CE}=20V I_C=25mA	50			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=30mA I_B=5.0mA			0.6	V
Base to Emitter Voltage	V_{BE}	V_{CE}=20V I_C=25mA		0.75		V
Transition Frequency	f_T	V_{CE}=10V I_C=10mA	60			MHz
Reverse Transfer Capacitance	C_{re}	V_{CB}=30V I_E=0 f=1.0MHz			1.6	pF


/ Electrical Characteristic Curve

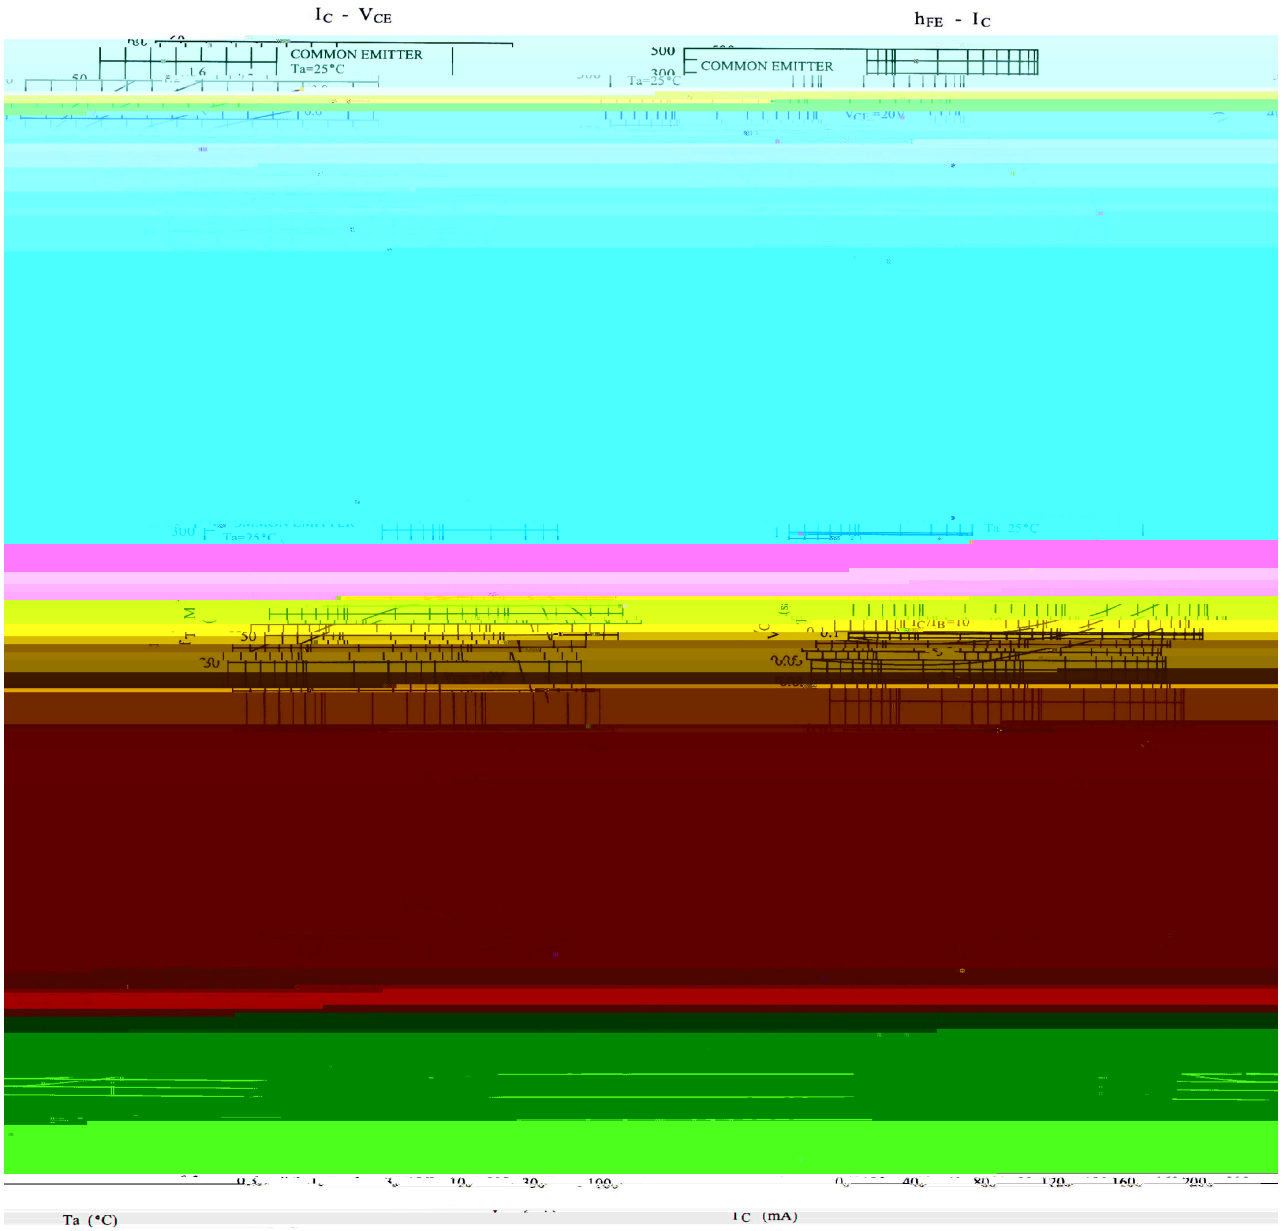

/ Package Dimensions

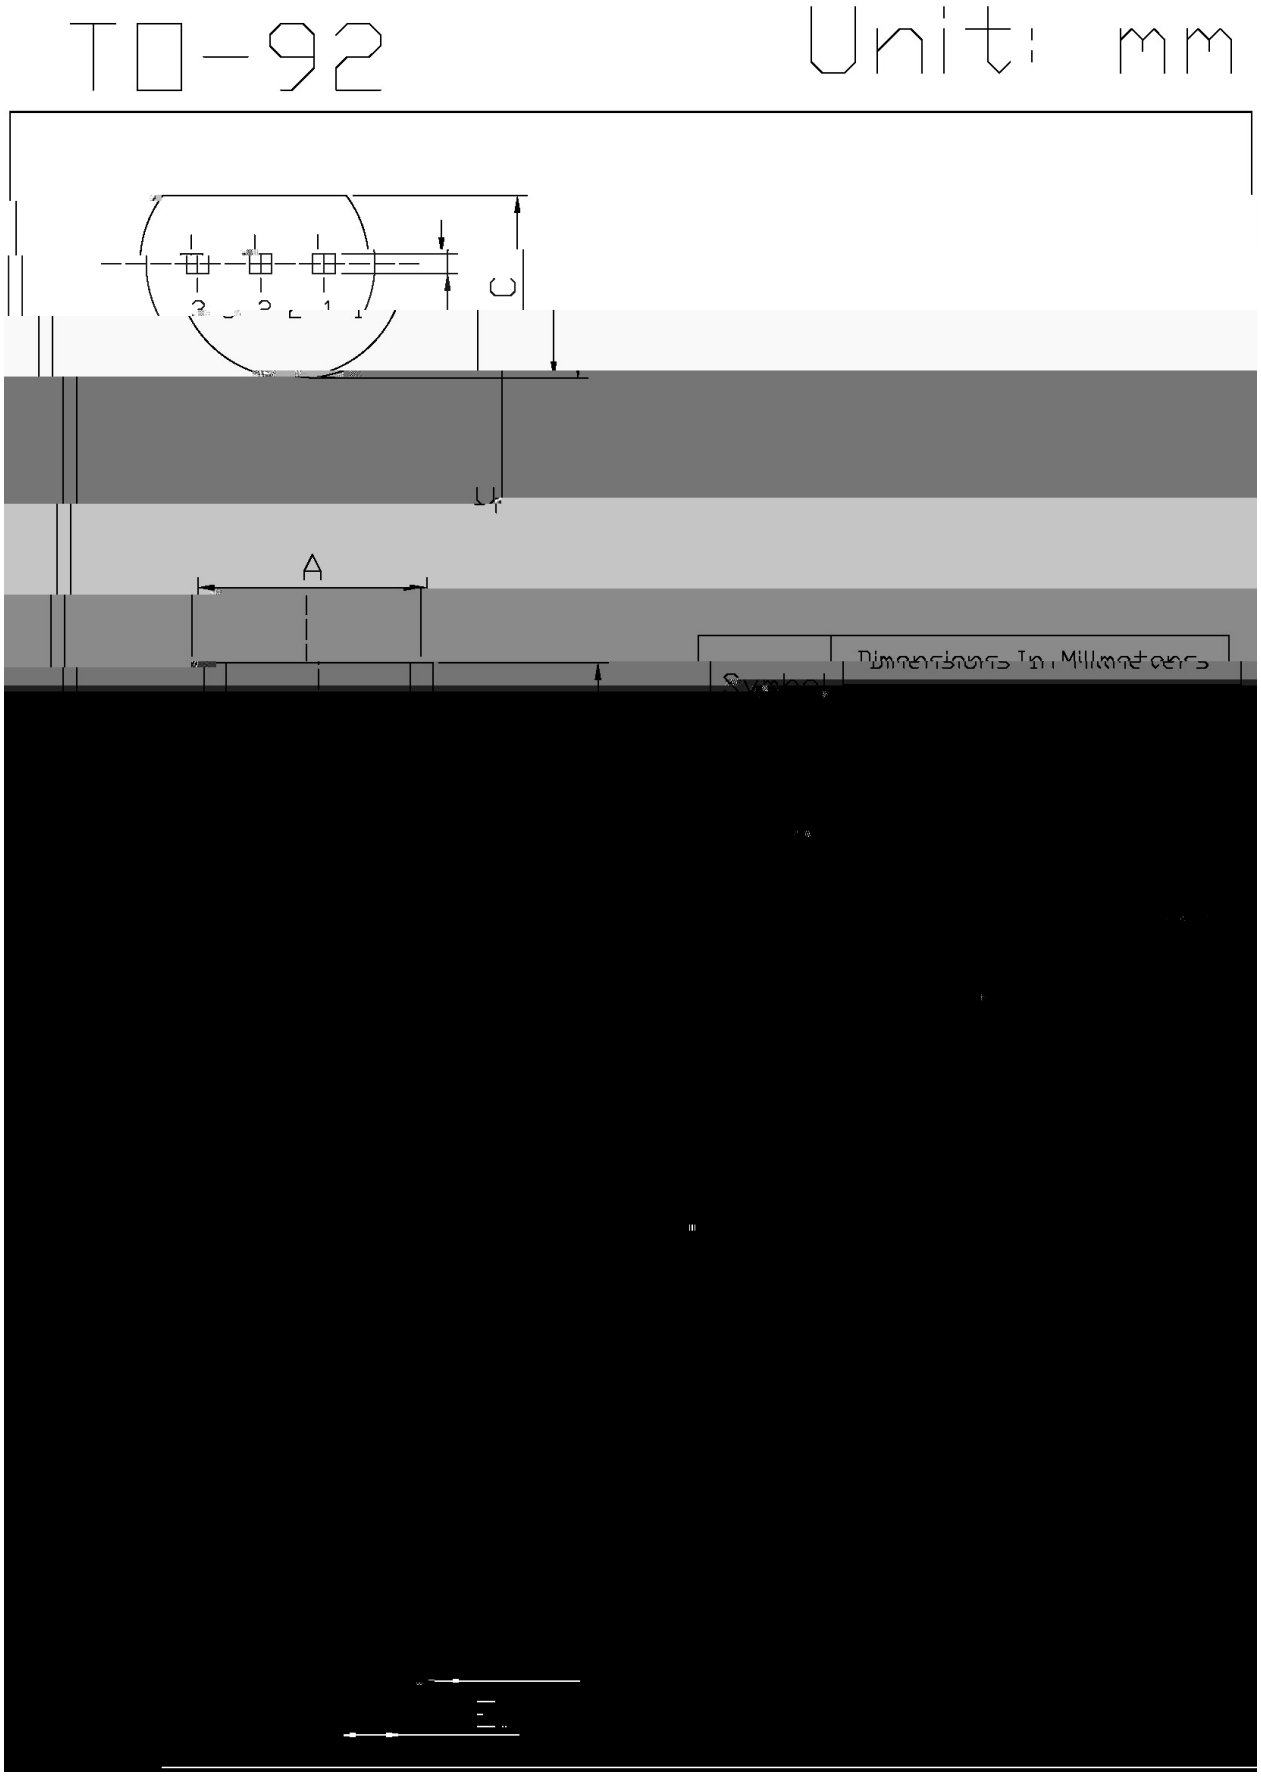

/ Marking Instructions

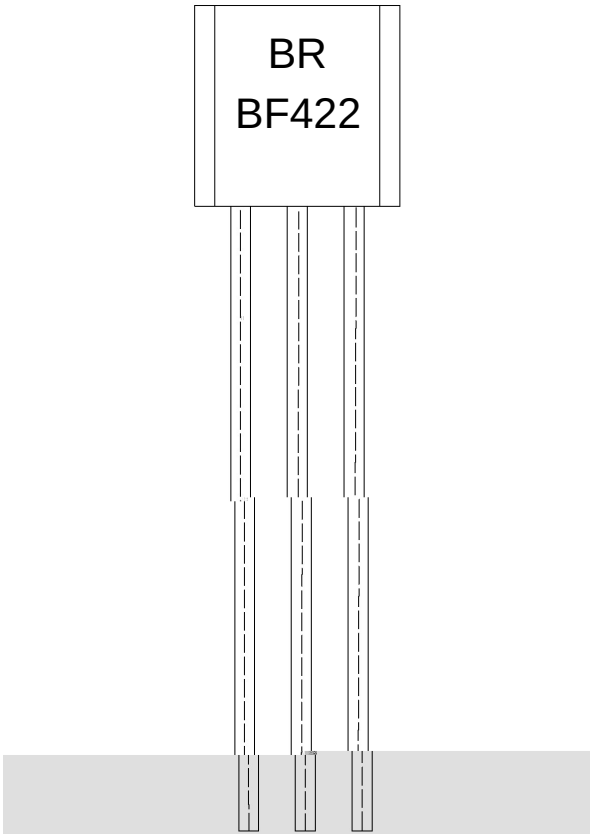

BR:

BF422

****

Note:

BR:	Company Code.
BF422:	Product Type.
****:	Lot No. Code,code change with Lot No.