ṂṂ Ŀ ؿ ʆ ῴ Ẕ ᄀ

Ḩ ↄ U/Ḩ r ⵏ ↄ ķ/Ầ ю ھ ỷ ồ

ໂ ㄡ ا ' GF2GF ڿ Ώ ⊐ ا ' Ầ ю

/ Absolute Maximum Ratings(Ta=25)

v ̏Ω̥	˦ ᴺ	̏Ω̥ Ӫ	ᴅ Ҥ

/ Electrical Characteristics(Ta=25)

v ̏Ω̥	˦ ᴺ	╜ ׀ ! ʈ	ῳ ṇ Ӫ	Ɛ ʒ Ӫ	ῳ ᶻ Ӫ	ᴅ Ҥ
		μ				
						μ
						μ
						μ
		μ				
						Ω
		Ω				

/ Electrical Characteristic Curve

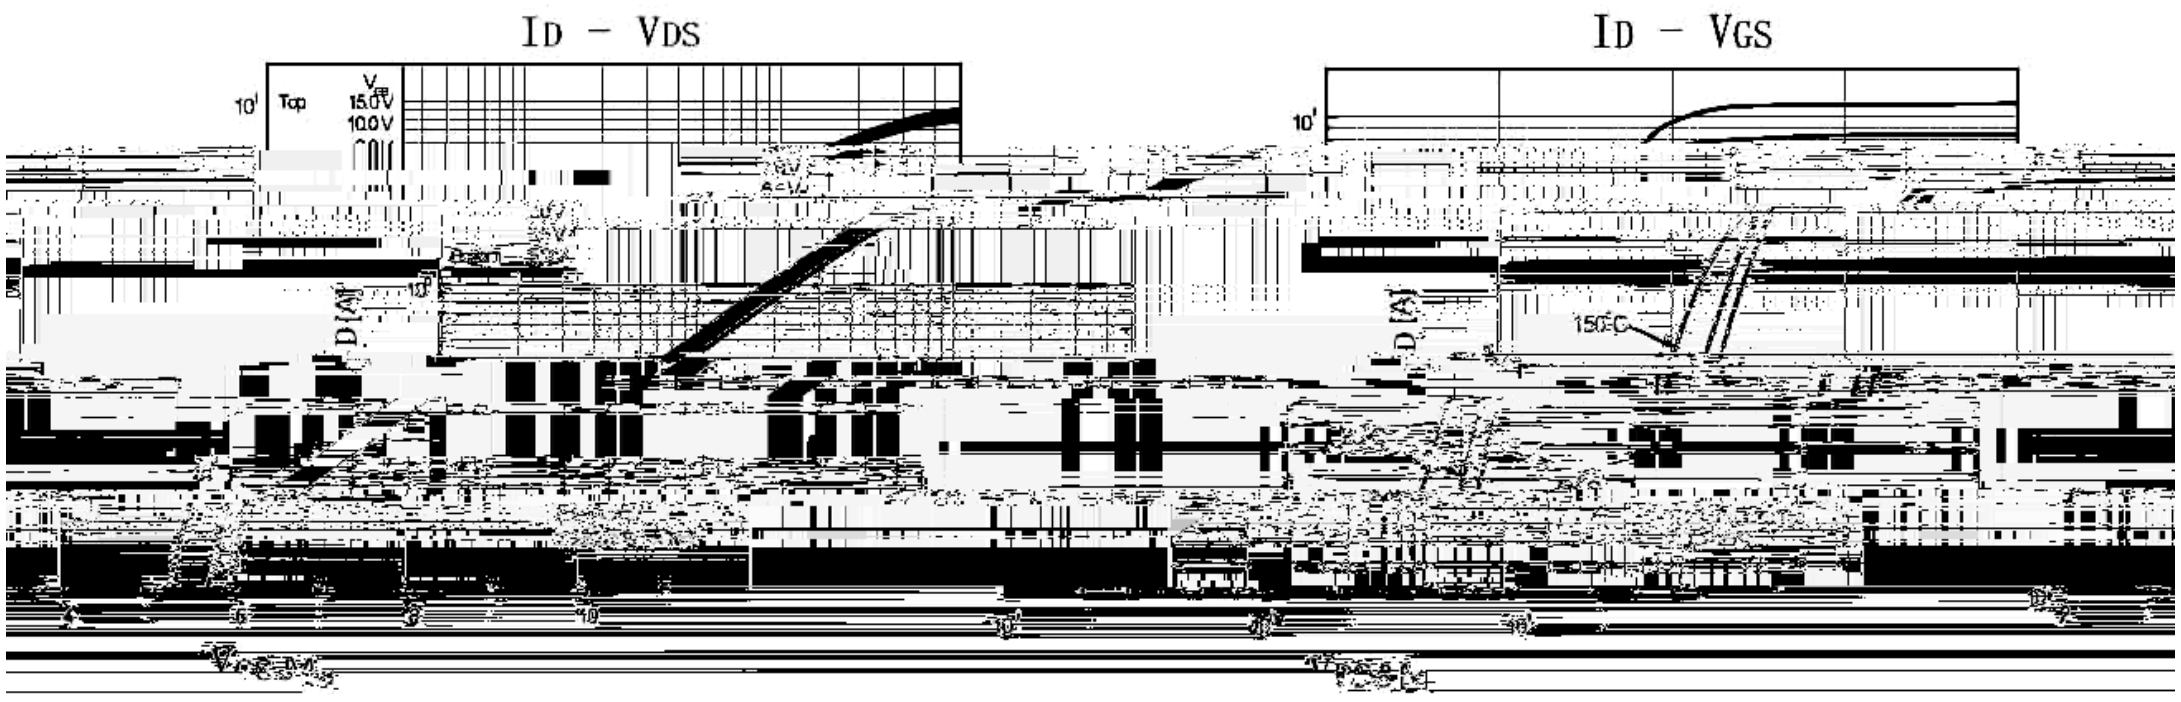

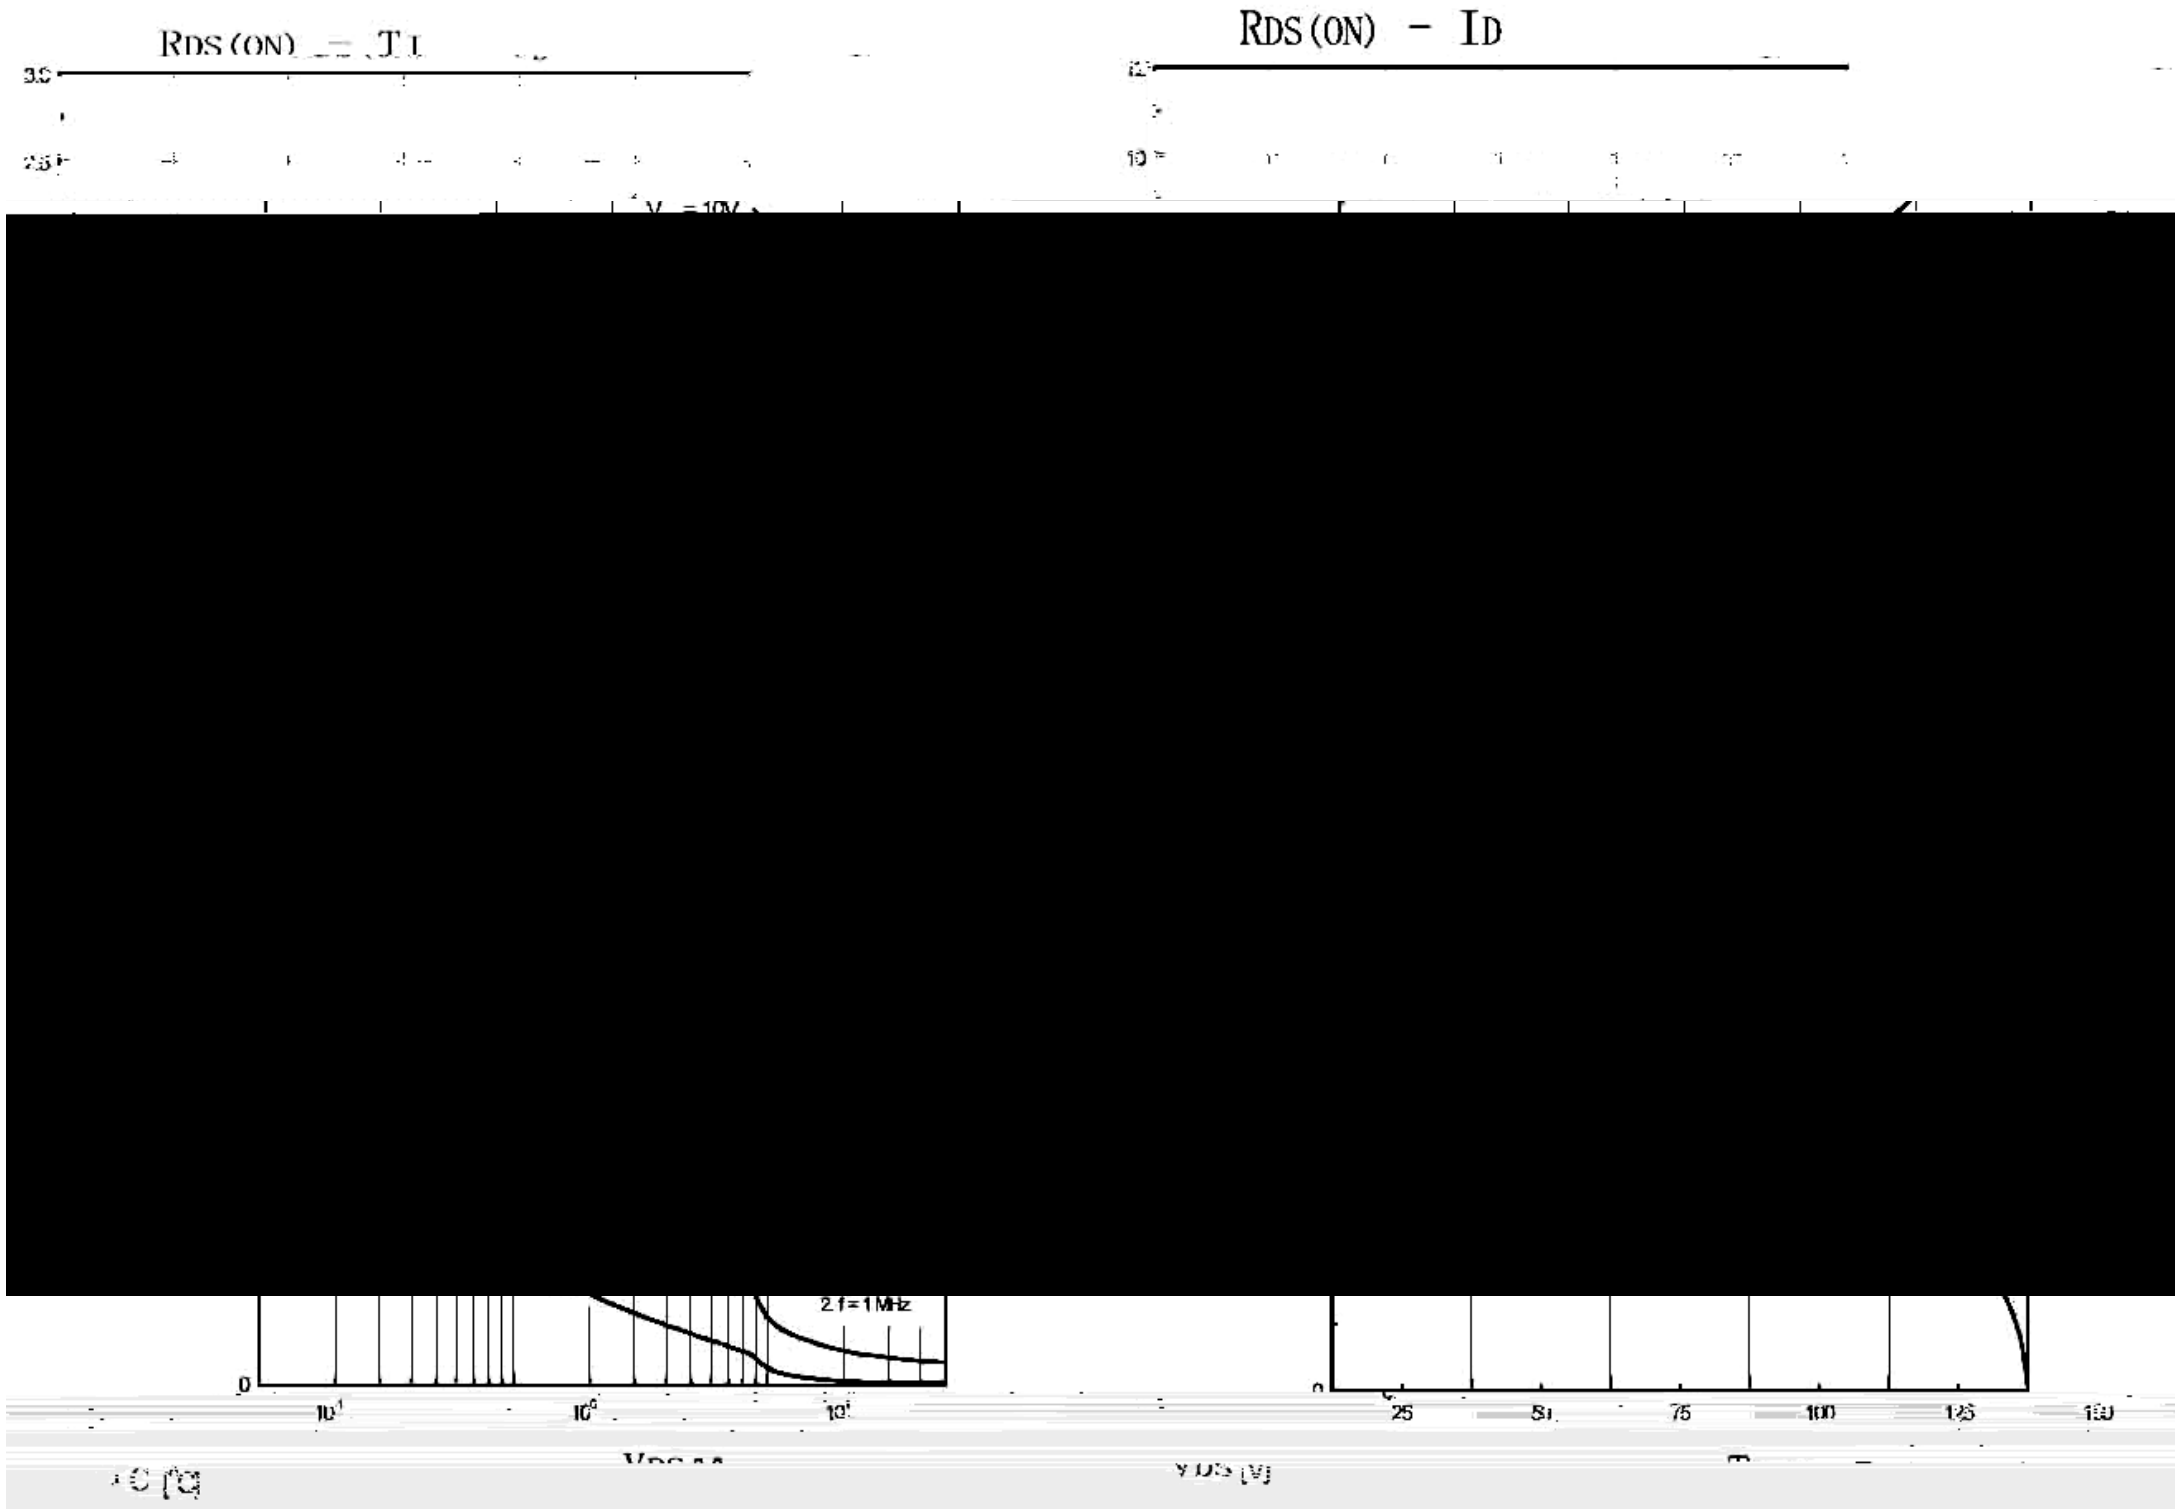

/ Package Dimensions

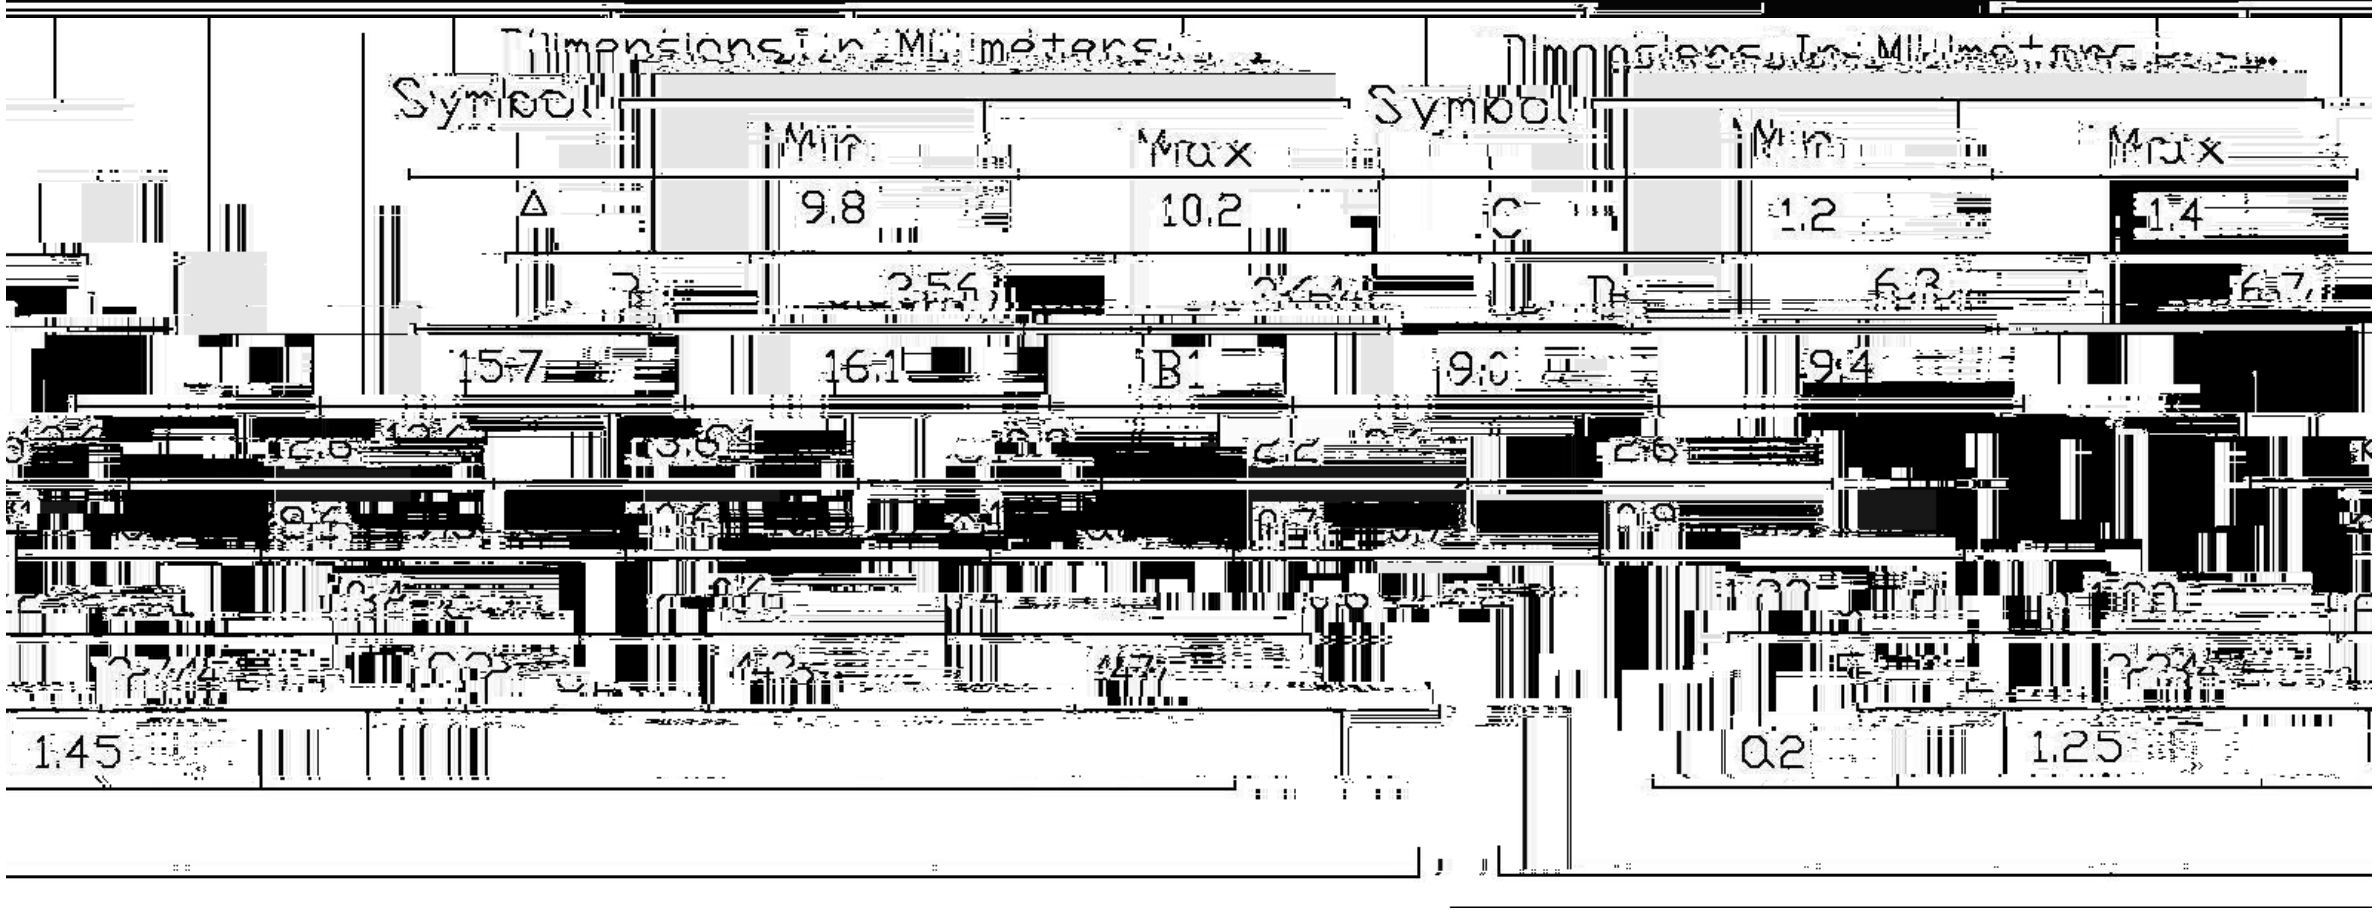

Symbol	Dimensions In Millimeters Min	Max	Symbol	Dimensions In Millimeters Min	Max
A	9.8	10.2	C	1.2	1.4
B	3.56	[illegible]	D	6.3	6.7
[illegible]	15.7	16.1	B1	9.0	9.4
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	1.45	[illegible]	a2	[illegible]	1.25

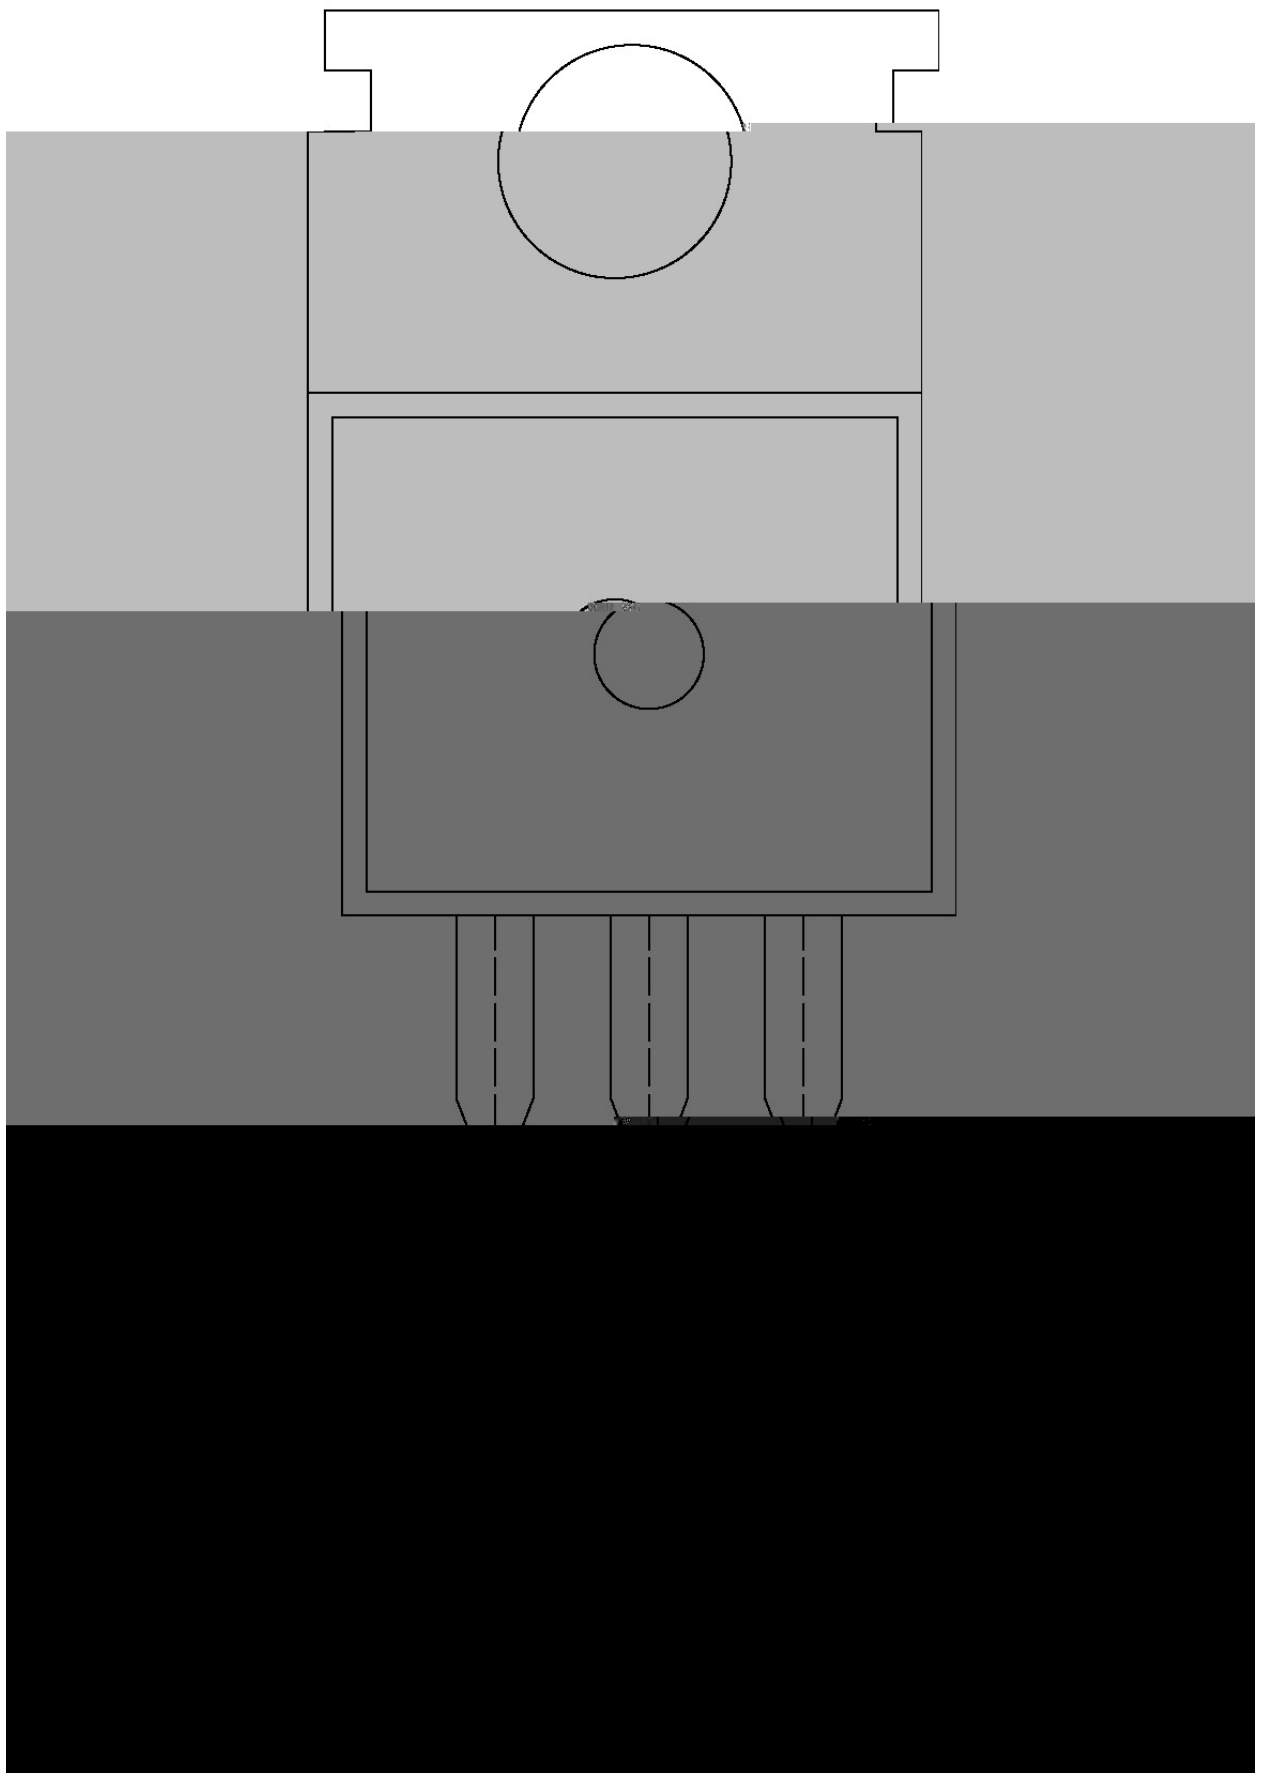

( ) / Temperature Profile for Dip Soldering(Pb-Free)

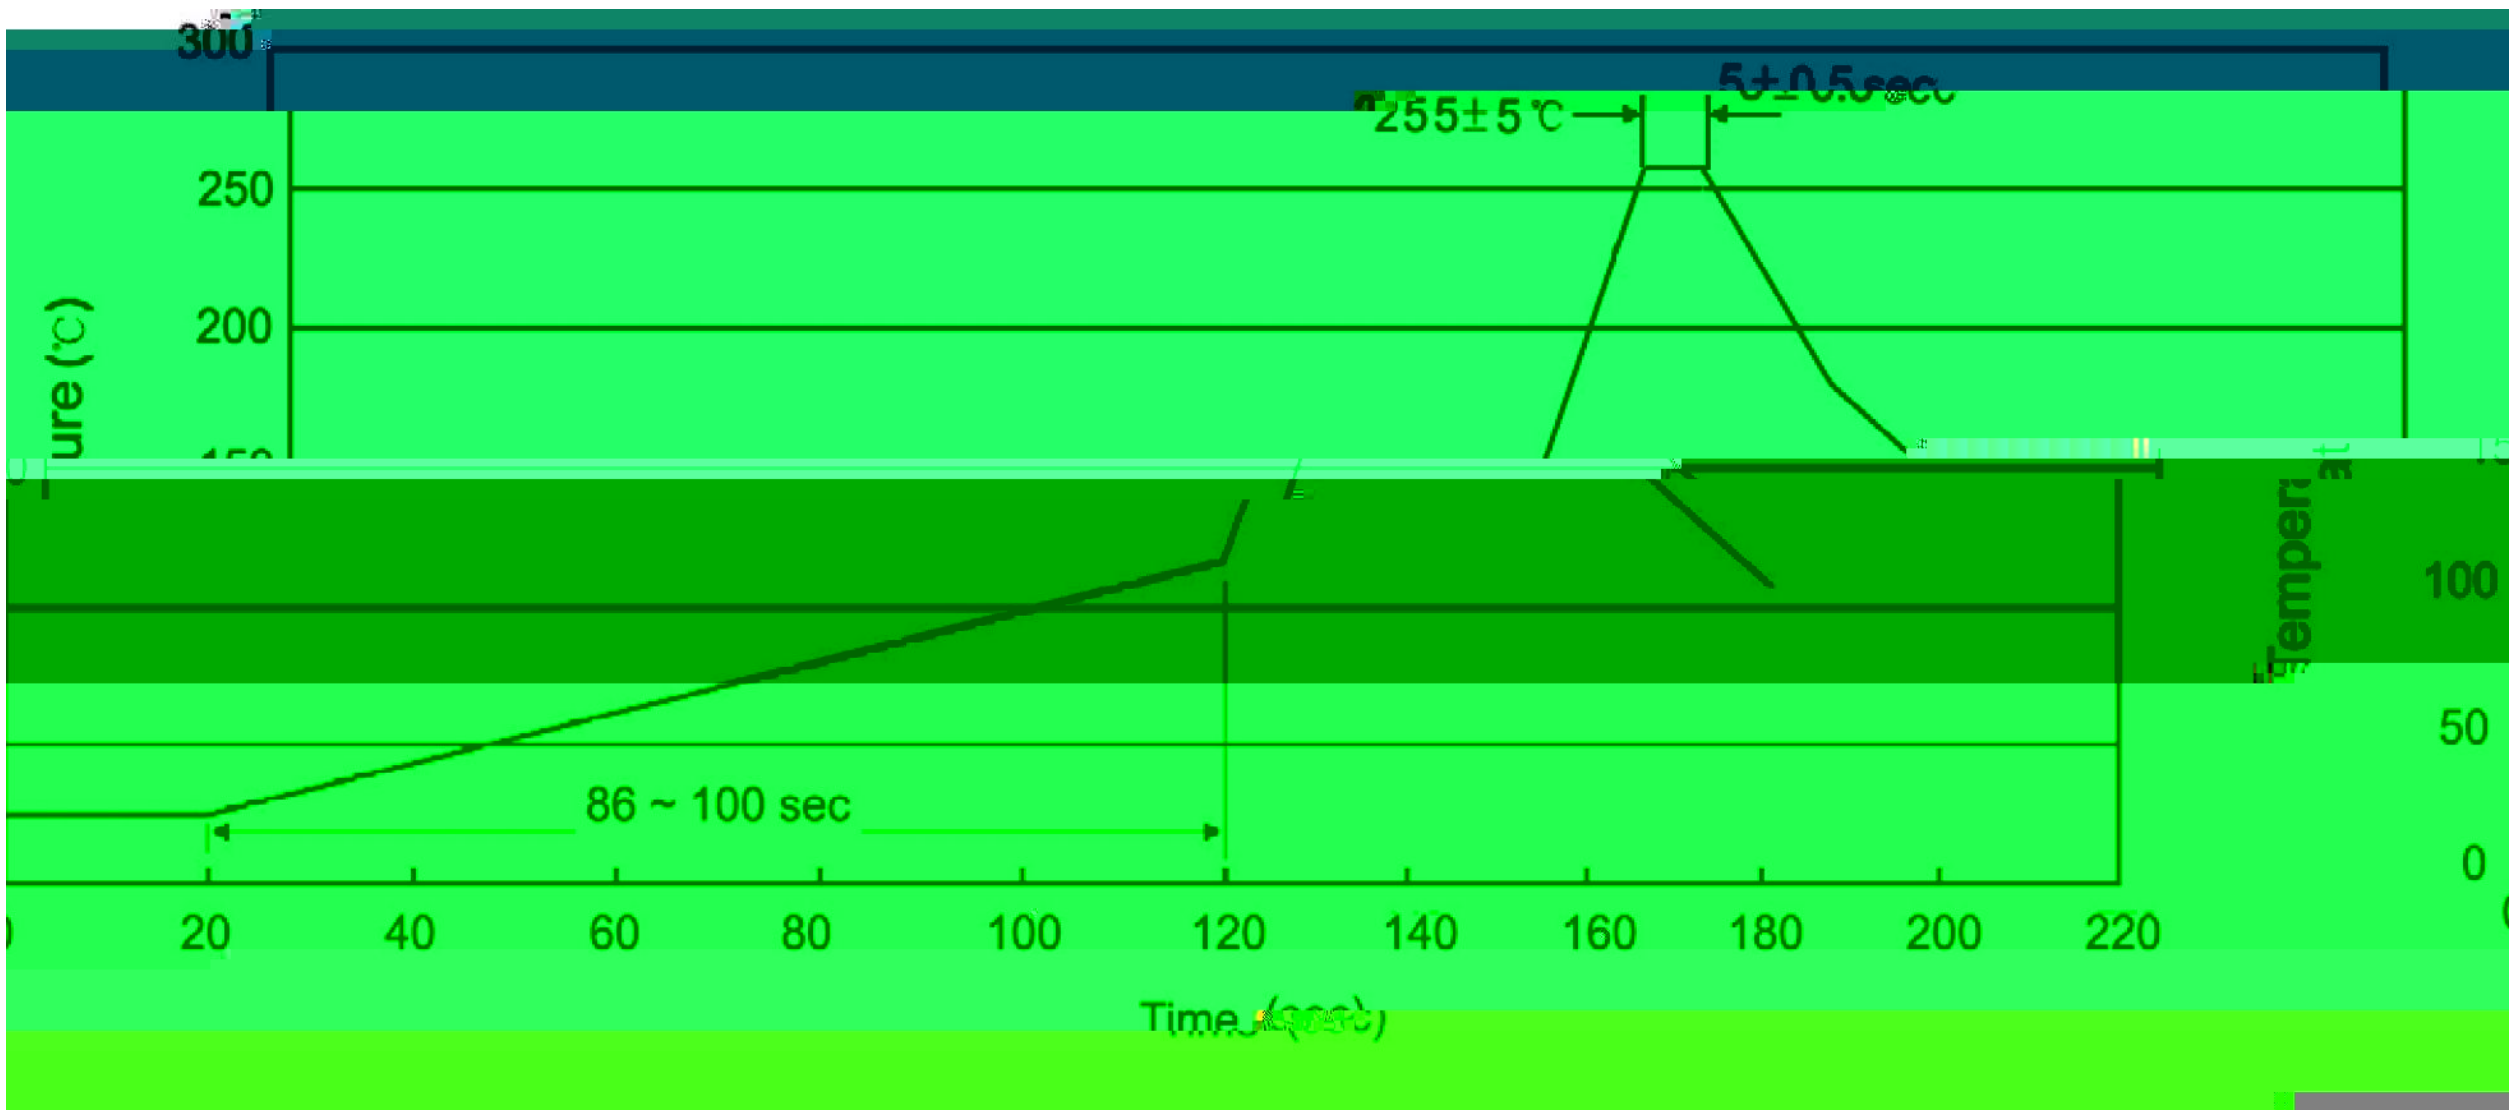

ب ˝ χ