

/ Package Dimensions

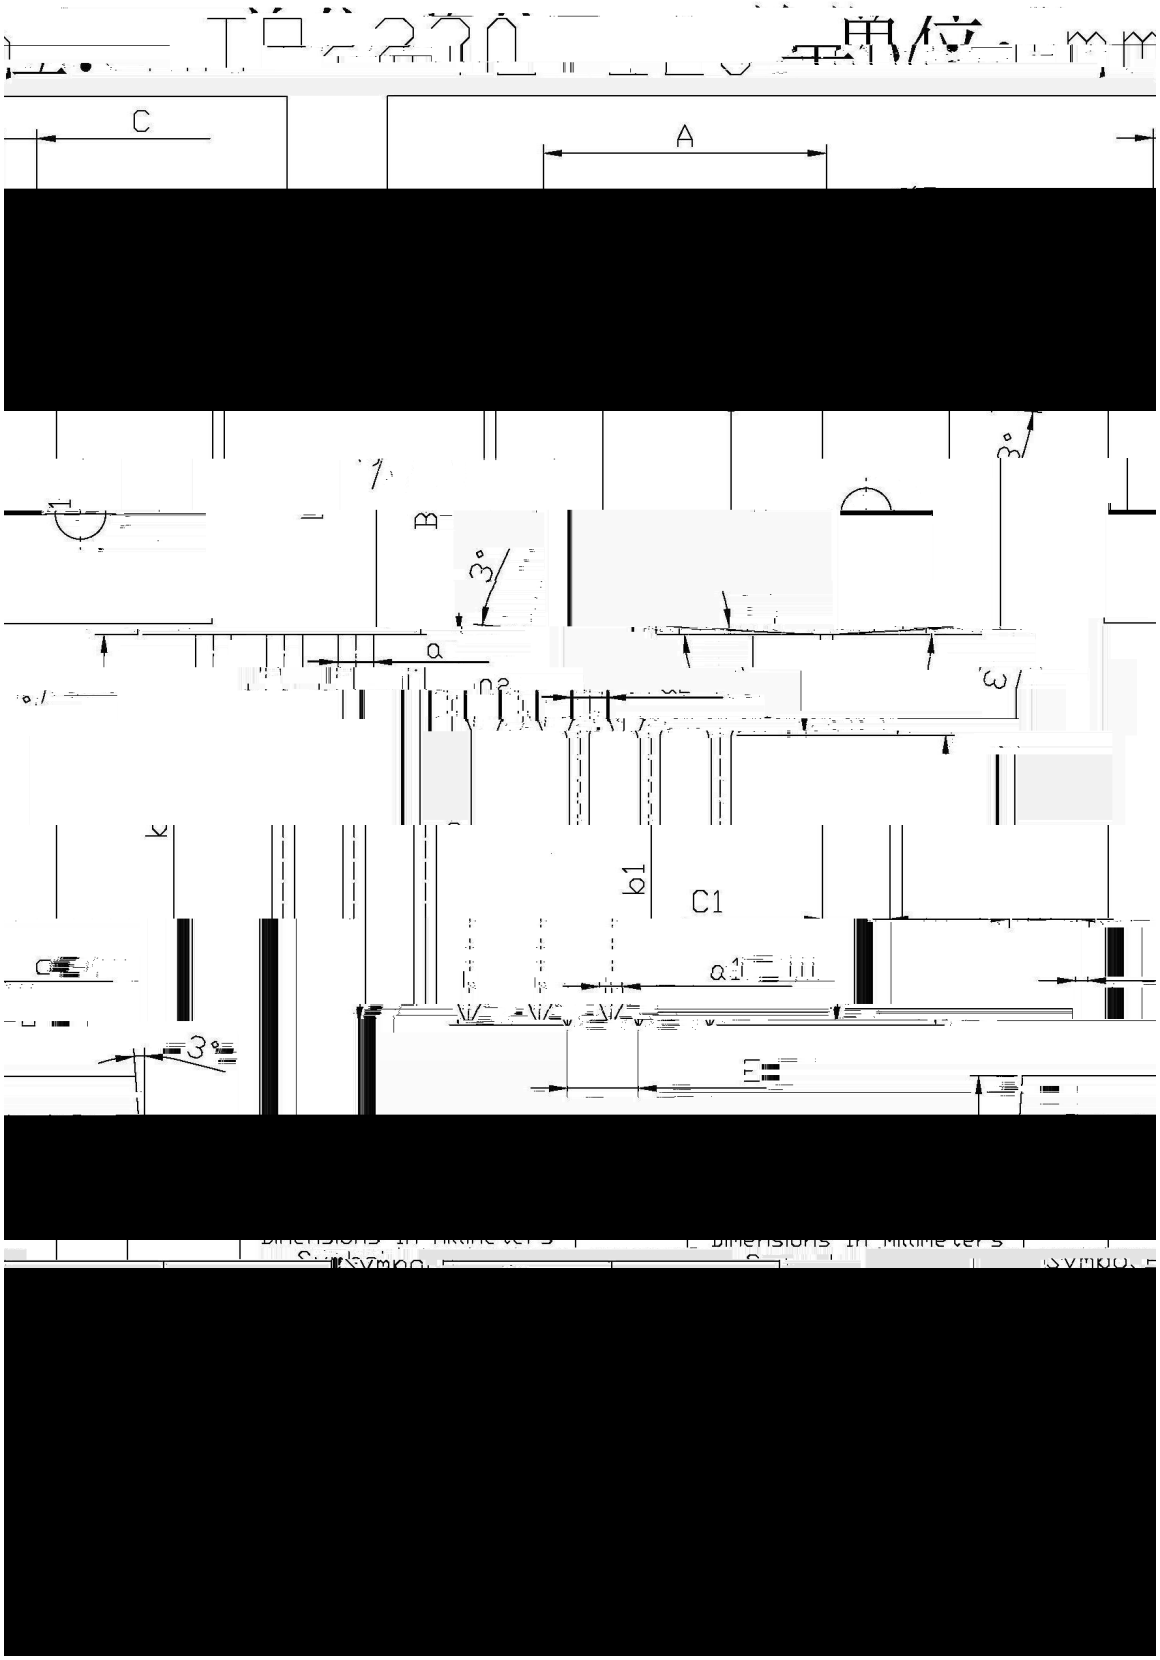

/ Marking Instructions

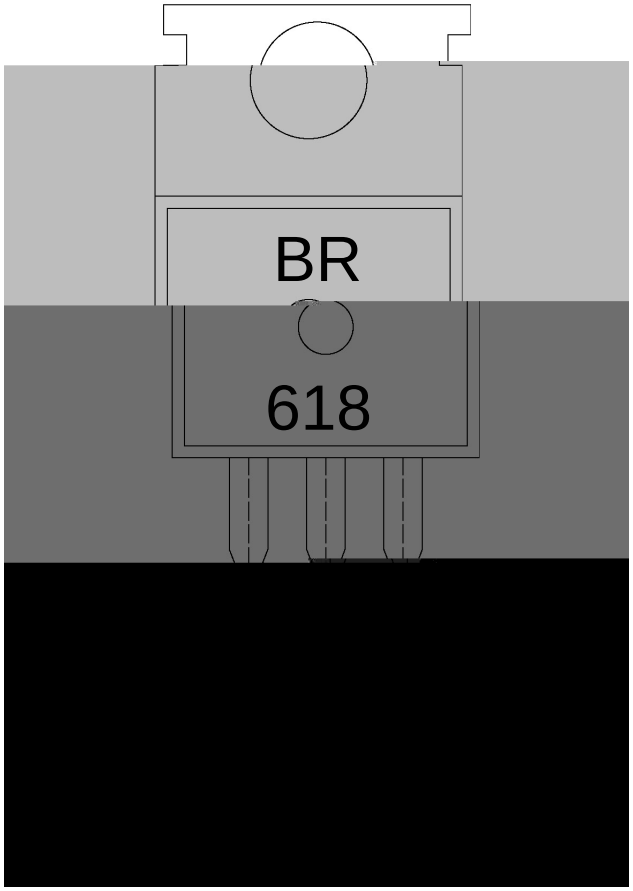


ِ ّ ؤ	
BR ؤ	ﺱ ٪ ﻭ ٦
618 ؤ	ﺱ ٣ ﻥ ٦
---- ؤ	ﺱ ﺍ ﻓ ﻯ ﻥ ٦ ﺍ ﻉ ﺍ ﻓ ﻯ ﻥ ﻱ ﻕ

Note:

BR:	Company Code
618:	Product Type.
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

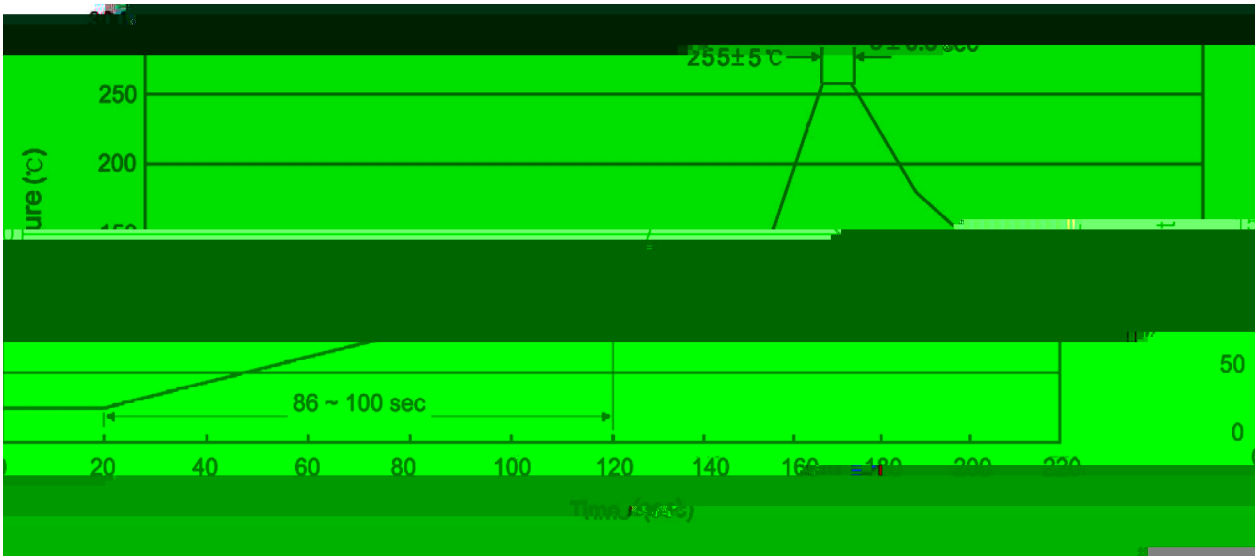

ب ˝ χ

1 Ĺ ♬ □ ỷ 25 Ḱ 150 ɬ ı ˋH ڑ 60 Ḱ 90sec;

2 Š Ө □ ỷ 255 ° 5 ɬ ı ˋH ڑ ˋY ﾊ ㎞ 5 ° 0.5sec;

3 ì ˙ ｲ ˛ ɔ ﻉ ỷ ㎞ 2 Ḱ 10 ɬ /sec.

Note:

1.Preheating:25~150 ɬ , Time:60~90sec.

2.Peak Temp.:255 ° 5 ɬ , Duration:5 ° 0.5sec.

3. Cooling Speed: 2~10 ɬ /sec.

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ 270 ° 5 ɬ ˋH ڑ χ 10 ° 1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

ˈ Ω ţ ｙ Ł / BULK

Package Type	Units					Dimension		(unit mm³)

˛ ｲ ｙ Ł / TUBE

Package Type	Units					Dimension		(unit mm³)

/ Notices