v ˝Ω̦ Parameter	ˠ ᴺ Symbol	˝Ω̦Ӫ Rating	ᴅ Ɉ Unit

/ Electrical Characteristic Curve

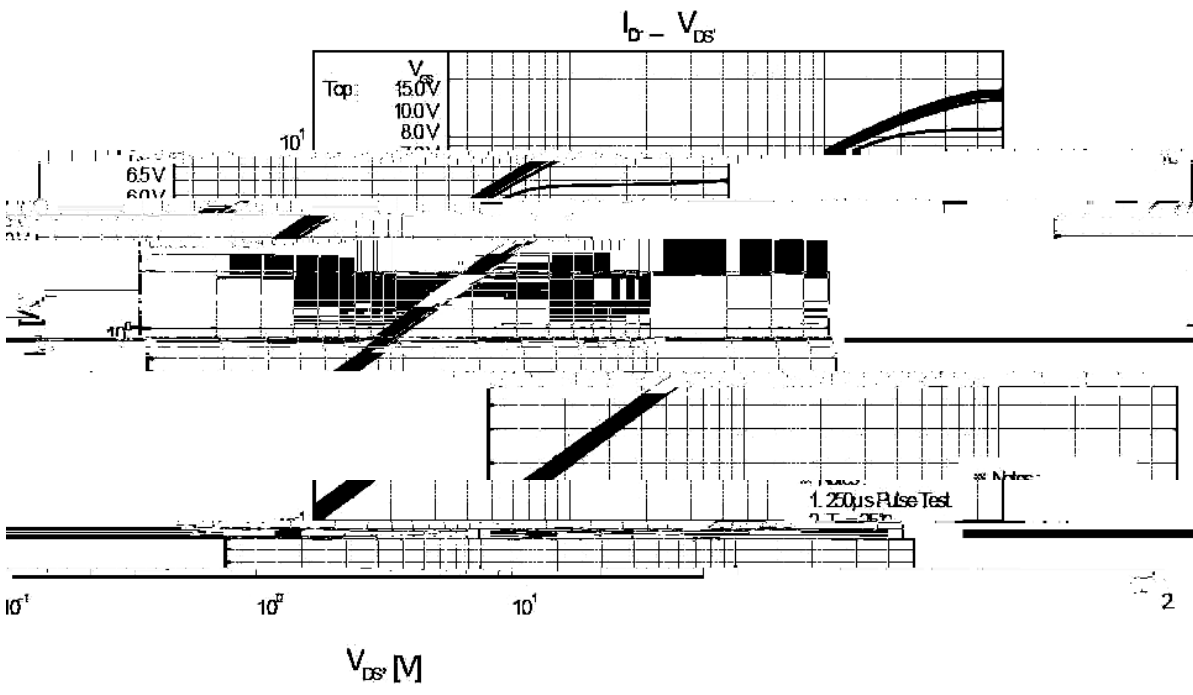

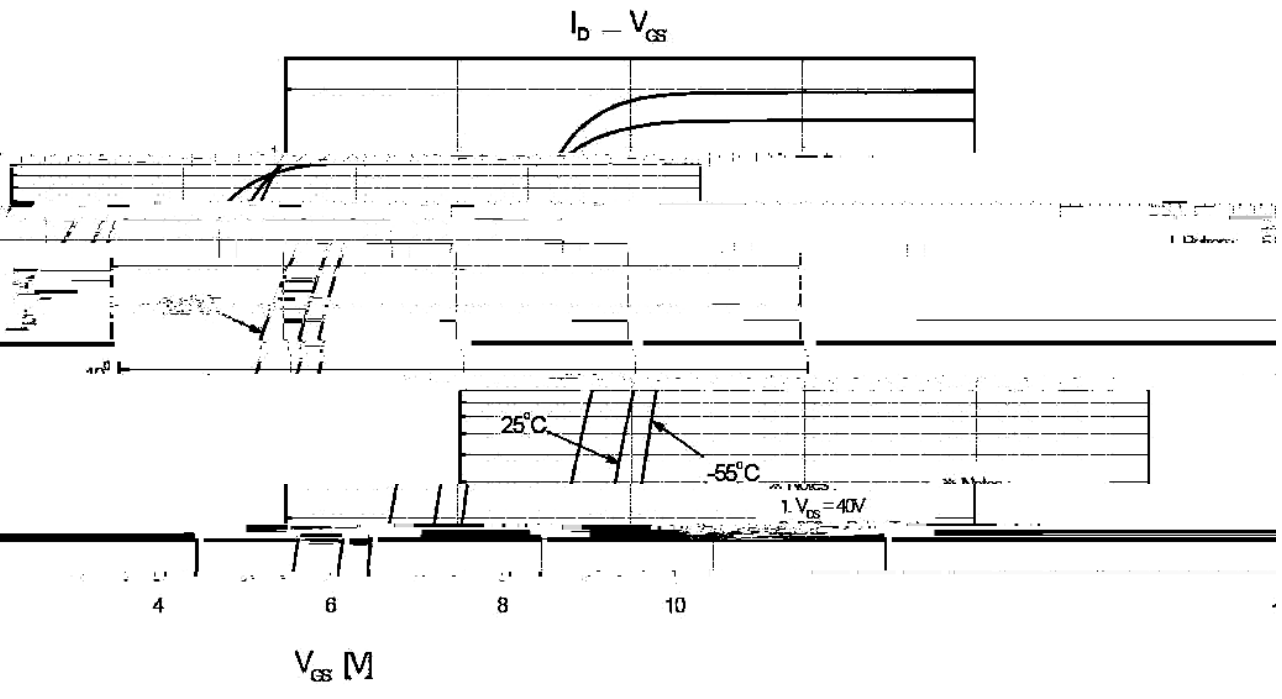

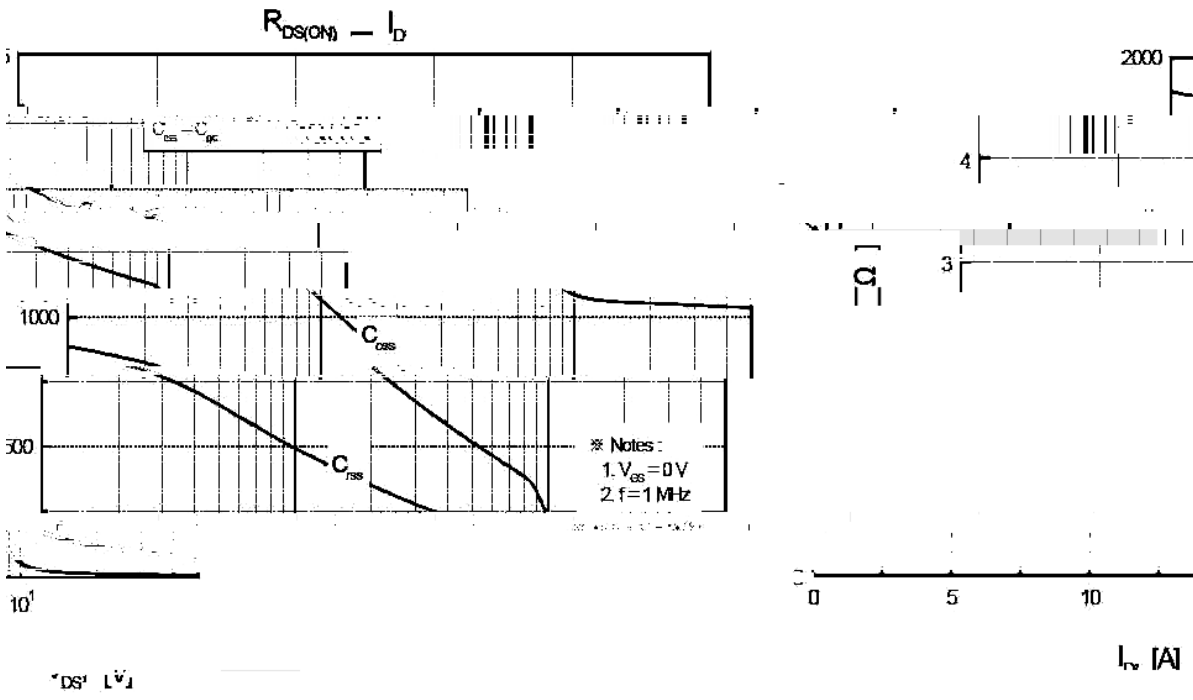

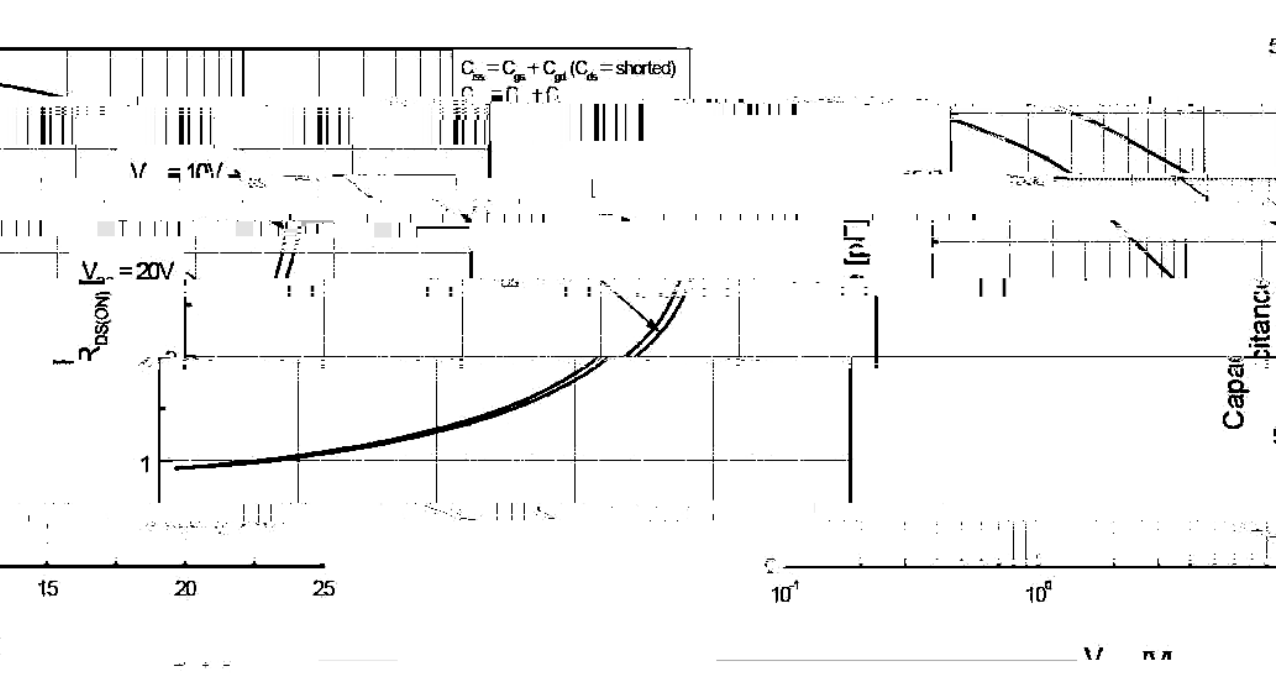

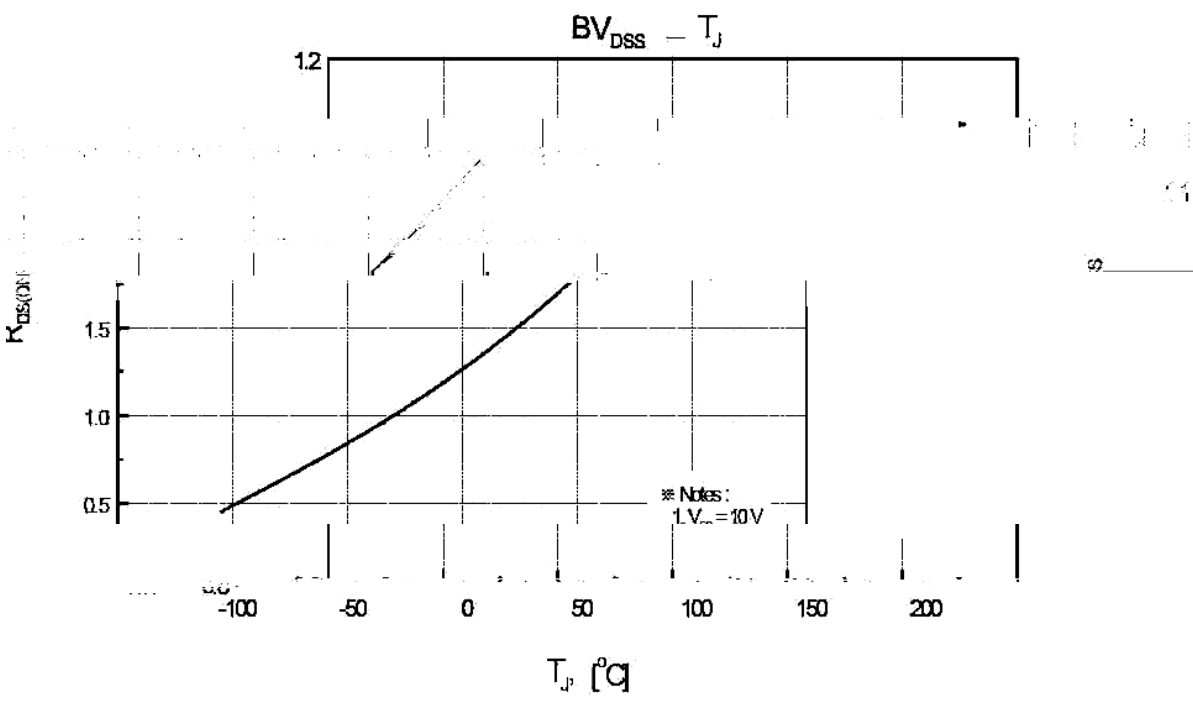

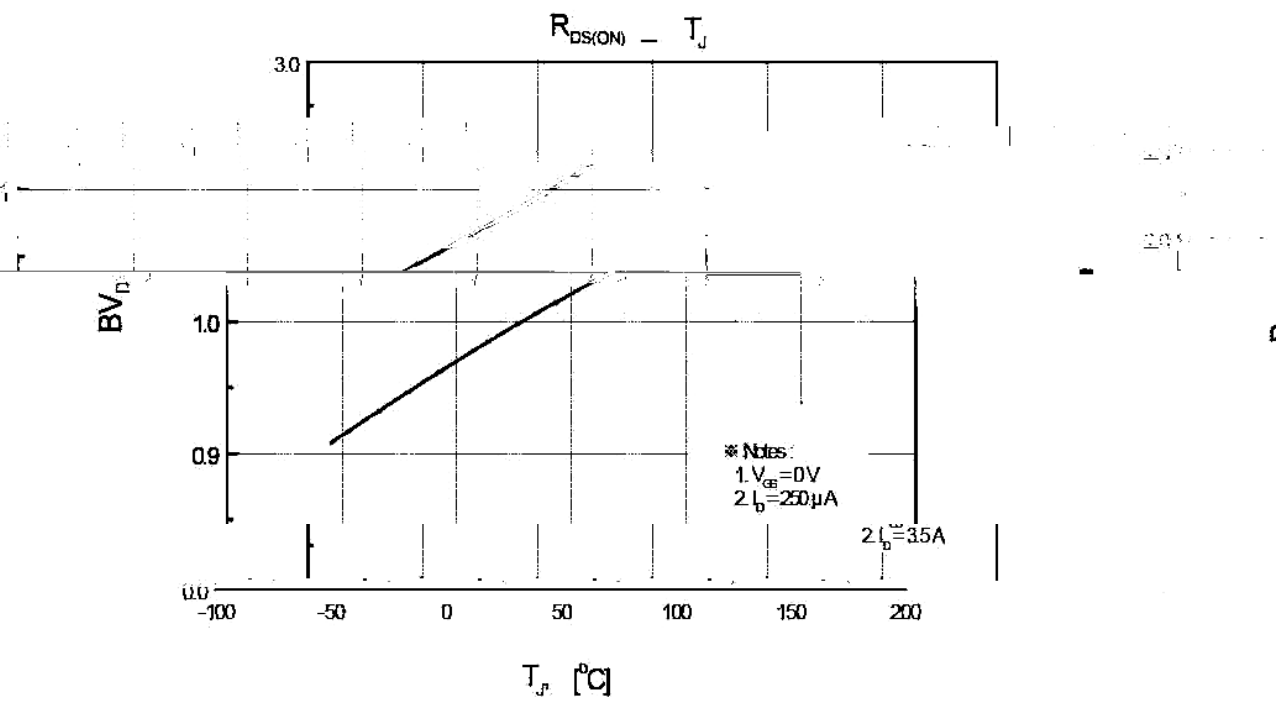

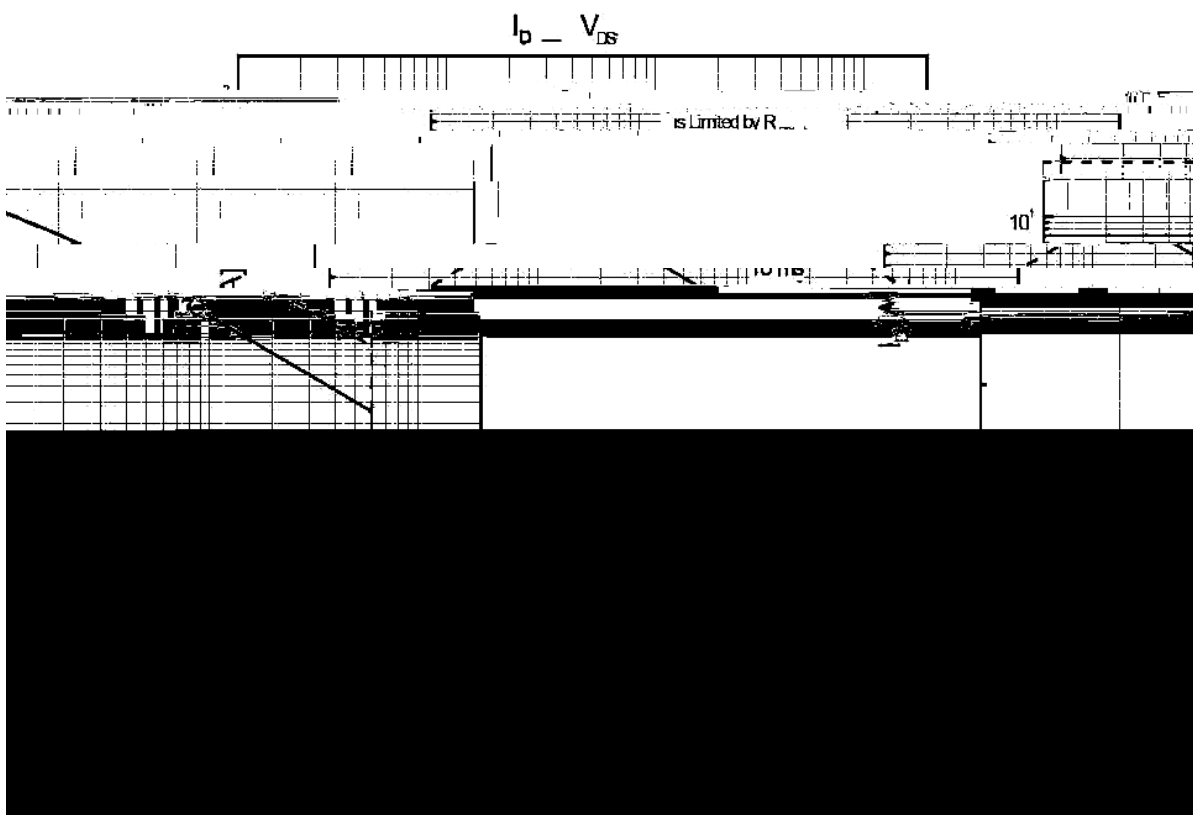

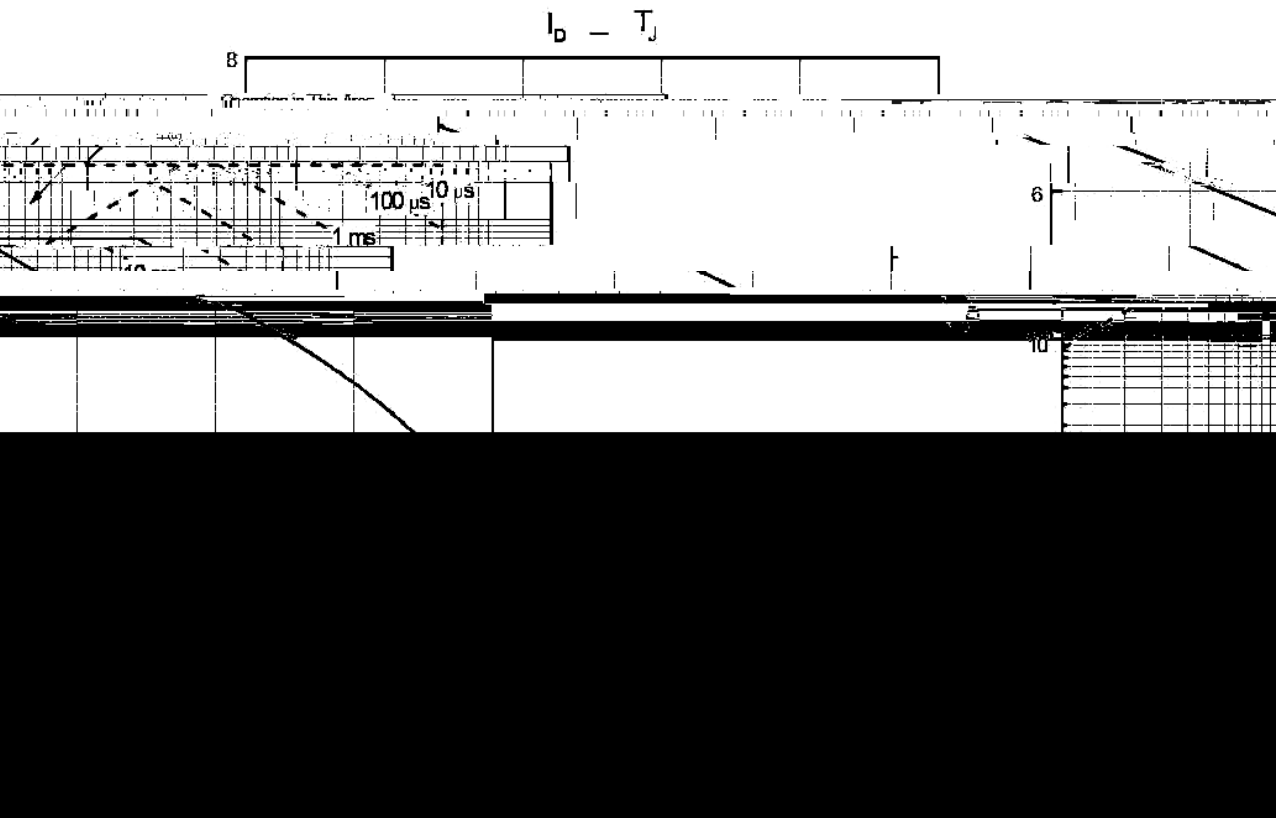

/ Package Dimensions

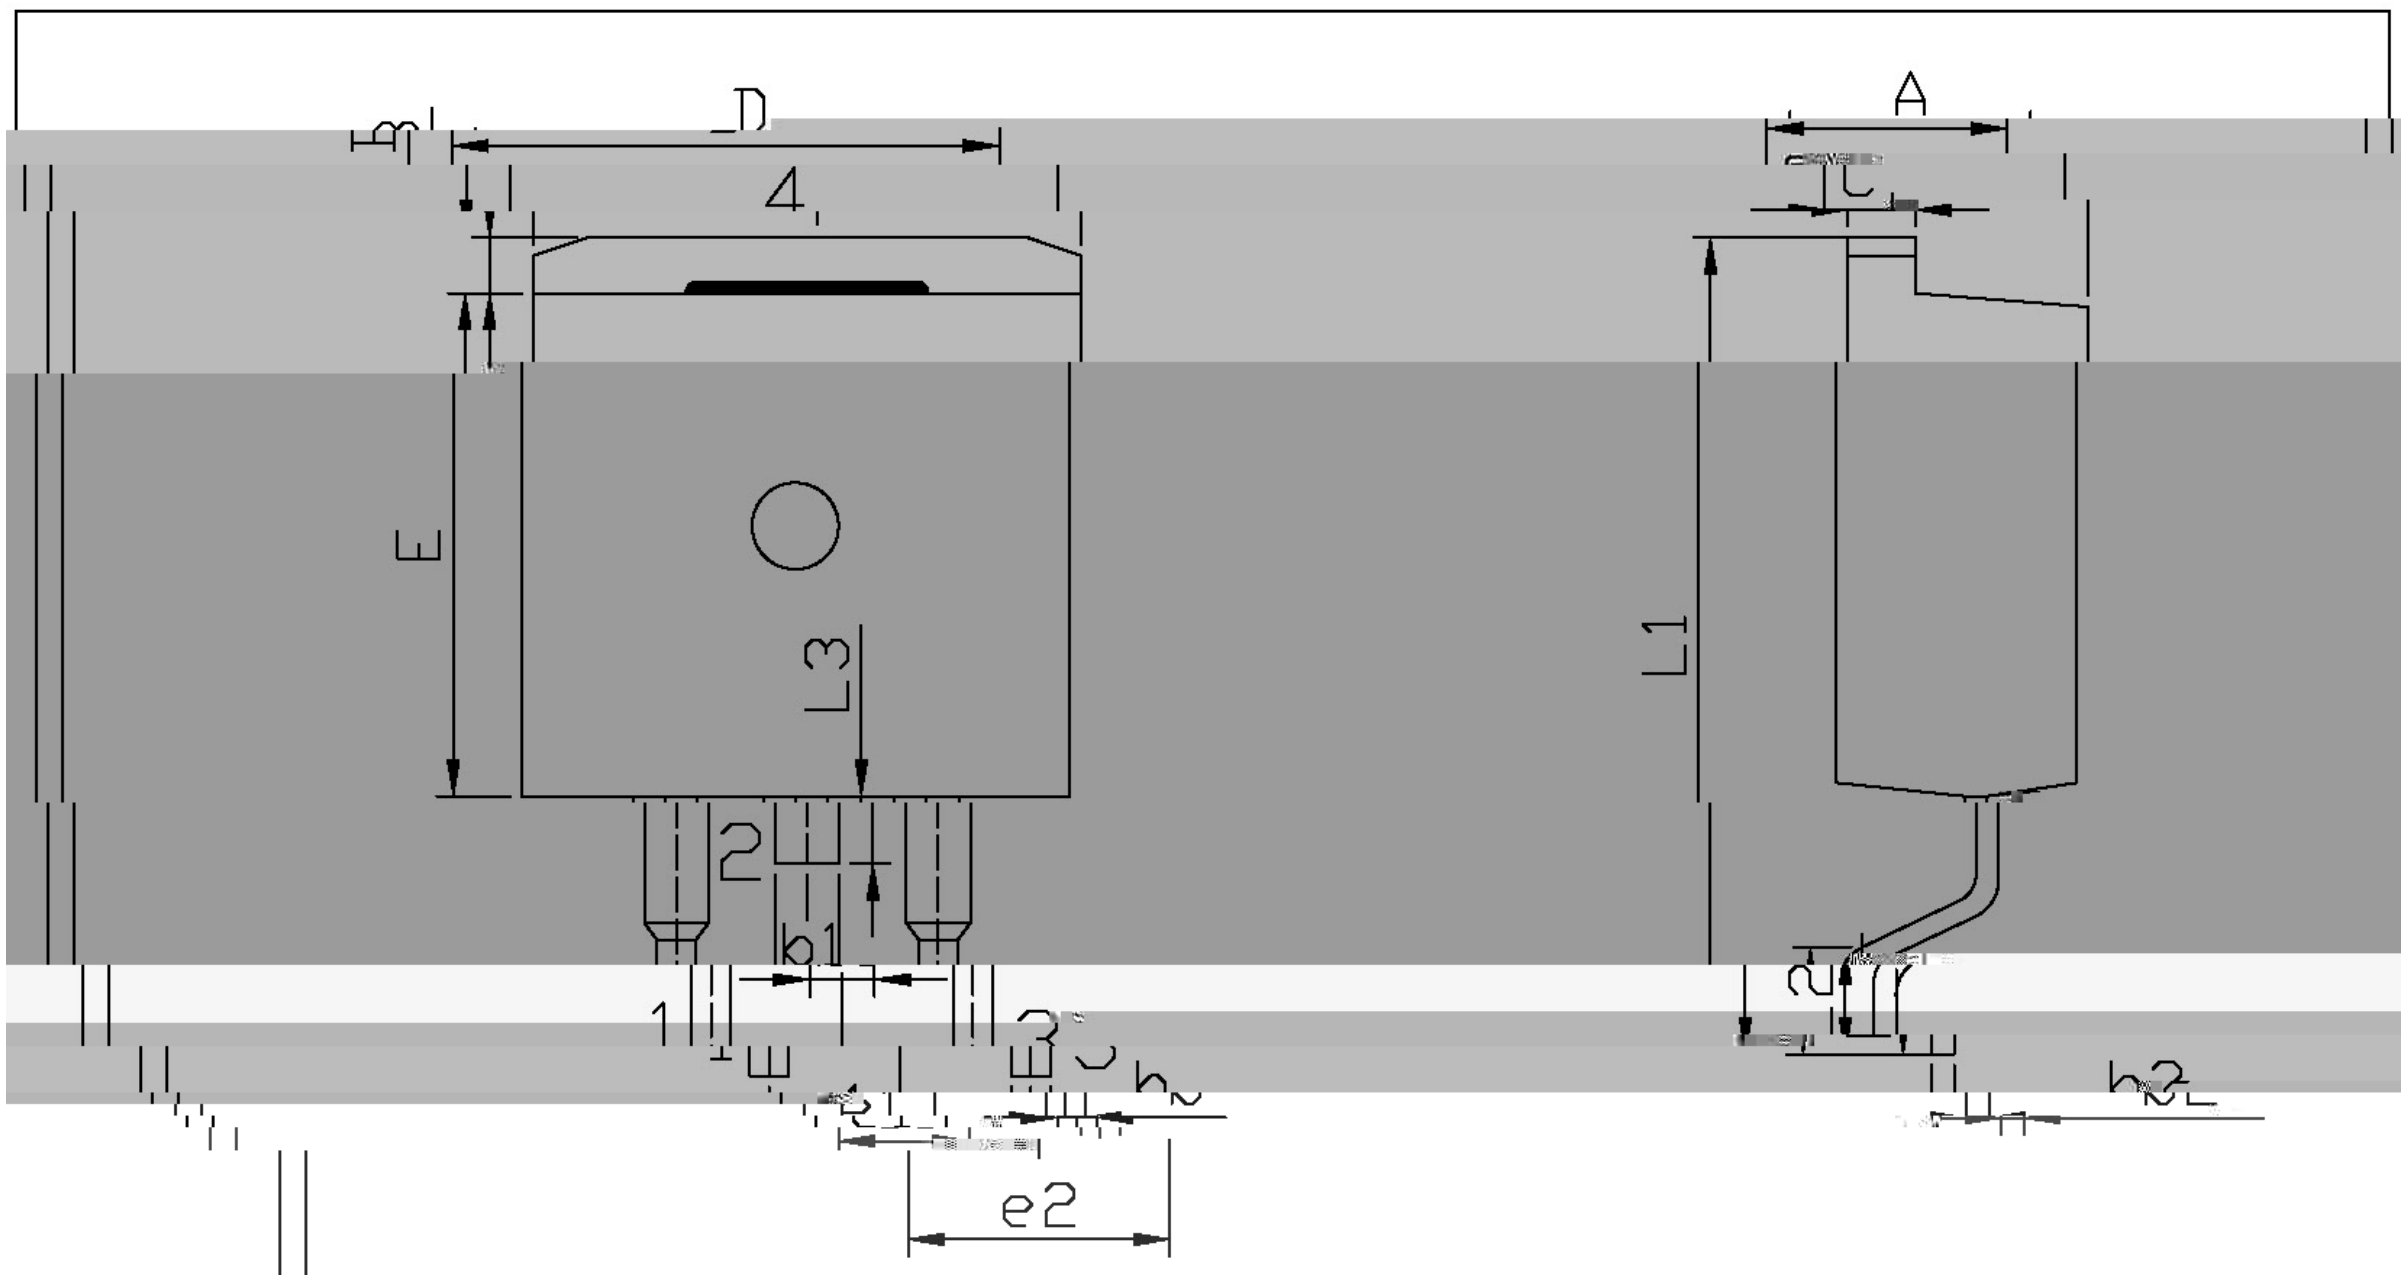

单位：m

Symbol	Dimensions In Millimeters Min	Dimensions In Millimeters Max	Symbol	Dimensions In Millimeters Min
A	4.30	4.70	E	9.00
B	1.00	1.40	e1	2.34

/ Marking Instructions

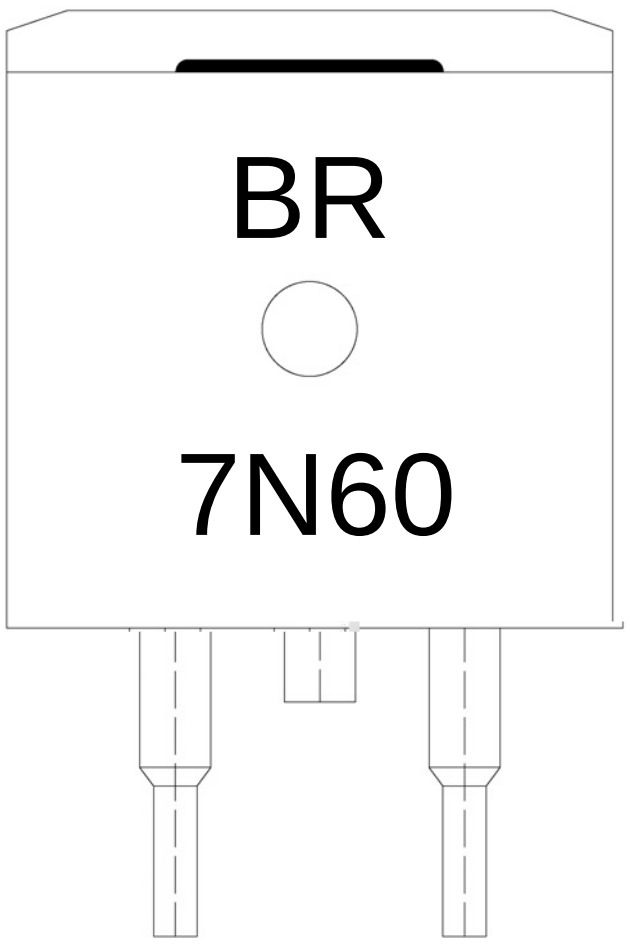

ب ˝ χ

BR χ	ҥӂ ʒ ᴎ Ҧ
7N60 χ	ҥӂ ʒ ᴺ Ҧ
---- χ	ҥӂ ˑꟾ ғ ή̋ ᴺ Ҧ ı ҿ ˑꟾ ғ ή̋ ᴺ ψ ק

Note:

BR:	Company Code
7N60:	Product Type.
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

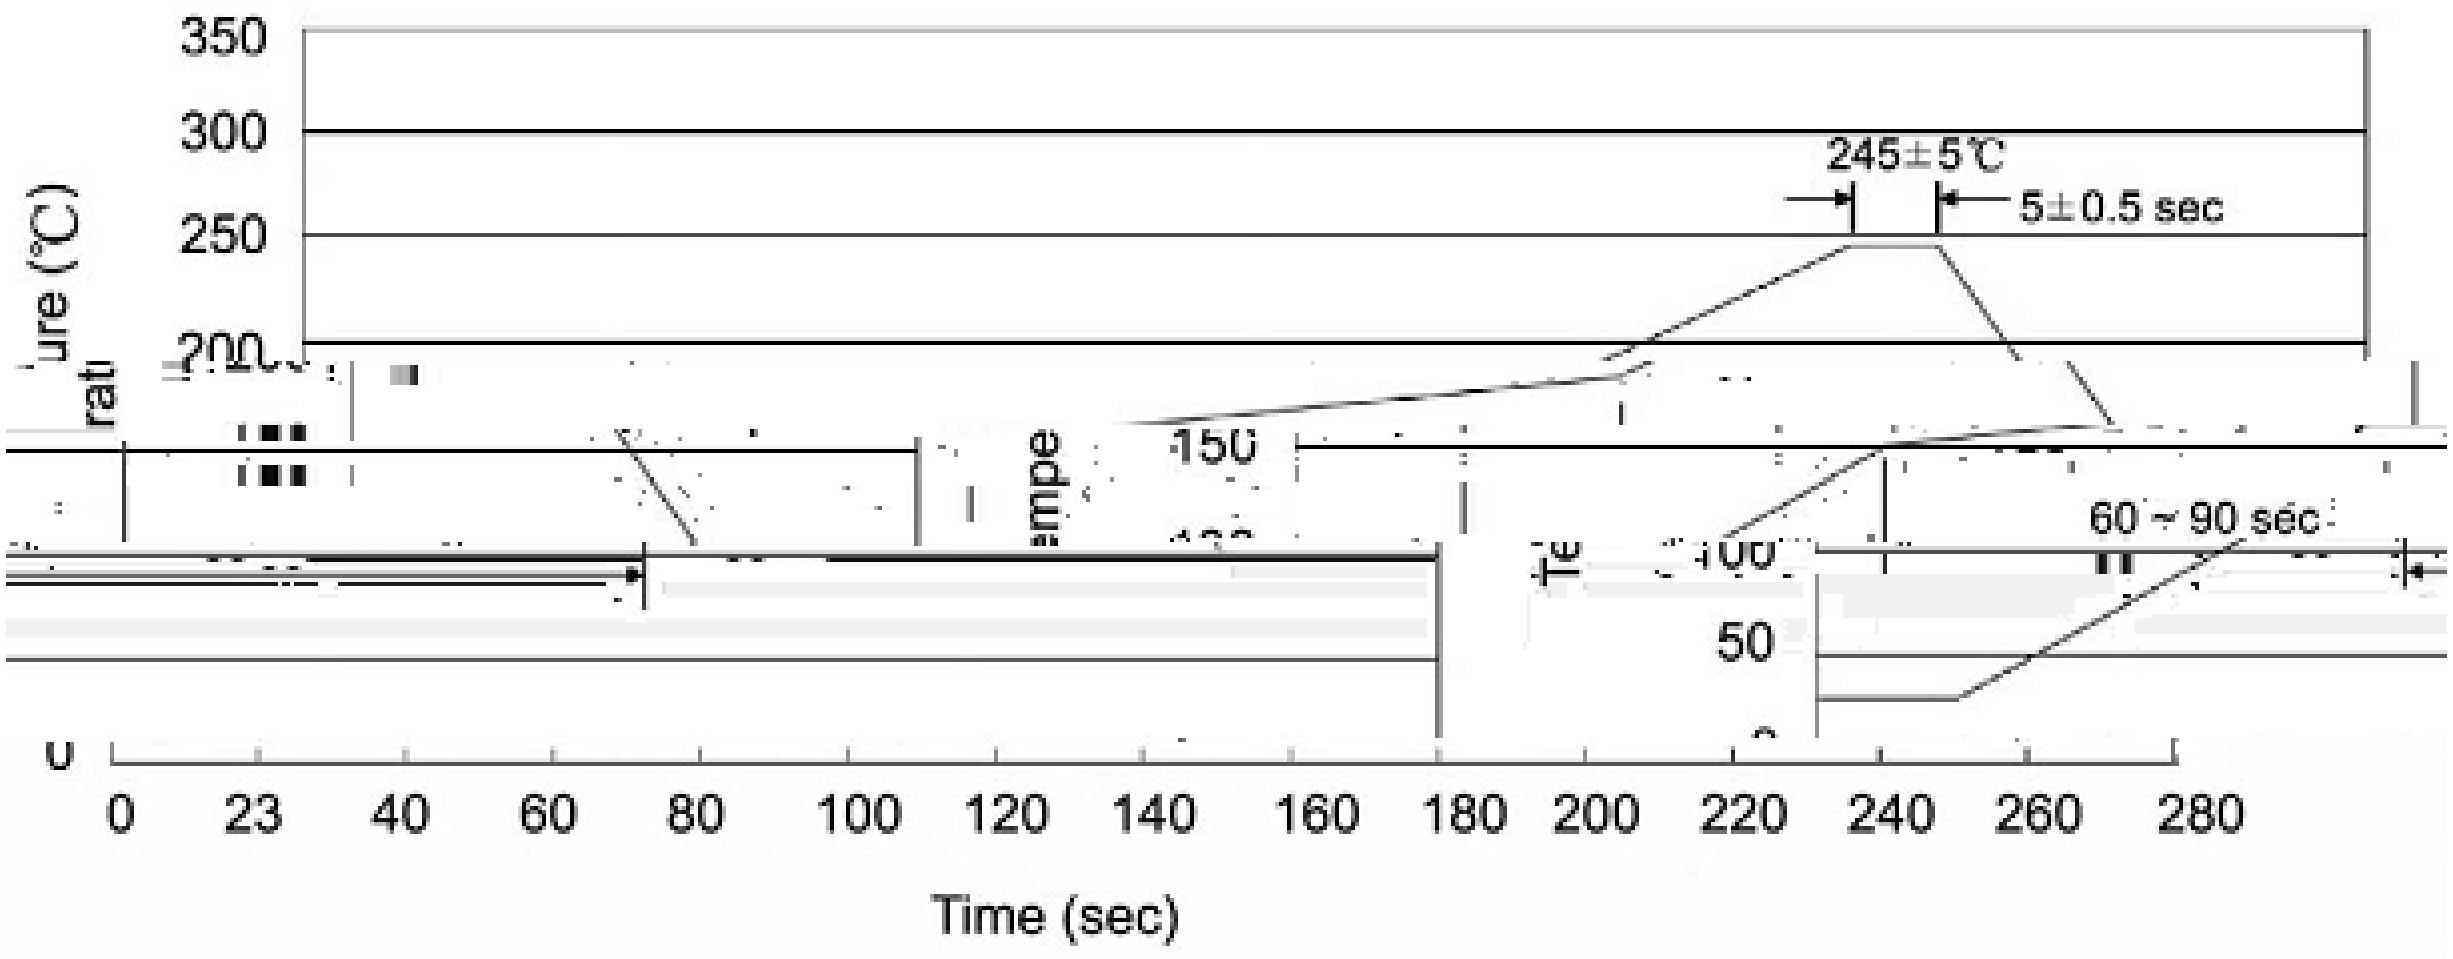

ب ˝ χ	Note:
1 ỉ ♬ □ ŷ 25 Ḱ 150 ɫ ı ῾H ڙ 60 Ḱ 90sec;	1.Preheating:25~150 ɫ , Time:60~90sec.
2 Š �super □ ŷ 245 ° 5 ɫ ı ῾H ڙ ῾Y ᠰ ᨤ 5 ° 0.5sec;	2.Peak Temp.:245 ° 5 ɫ , Duration:5 ° 0.5sec.
3 ì ˙ ℩ ˛ ɔ ﻫ ŷ ᨤ 2 Ḱ 10 ɫ /sec.	3. Cooling Speed: 2~10 ɫ /sec.

/ Resistance to Soldering Heat Test Conditions

□ ŷ χ 260 ° 5 ɫ ῾H ڙ χ 10 ° 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

ᘏ ˋ ɣ ᒷ / REEL

Package Type	Units					Dimension		(unit mm³)

˯ ˥ ɣ ᒷ / TUBE

Package Type	Units					Dimension		(unit mm³)