

	! "#$%				
&	! !$'$"'	"			
(	! $%$)	*++	, - . / (01$/"!" 2 3 / %'4'5 '4!6'789 ''4'5 '4 !6'789		
,	! $#$""	)	:,0;<(=>$?1.:,0;@A>$?1.1(B (1?=(A10$:-.:10$?,		


BRBC817Q


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	50	V
Collector to Emitter Voltage	V_{CEO}	45	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	500	mA
Collector Current - peak collector current	I_{CM}	1.0	A
Collector Power Dissipation	P_C	250	mW
Junction Temperature	T_j	150	℃


/ Electrical Characteristic Curve

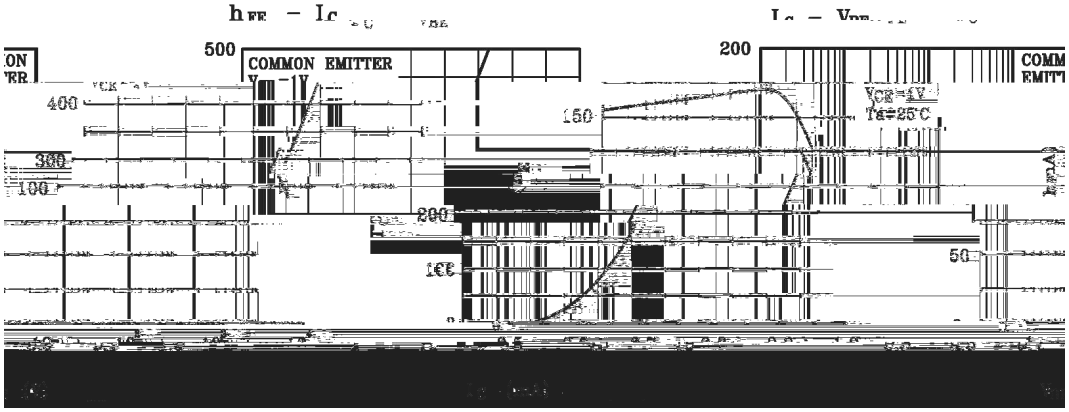

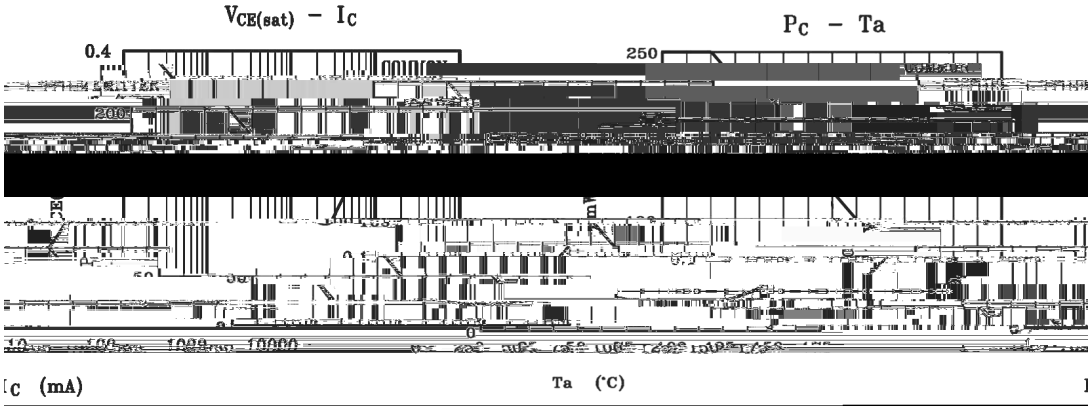


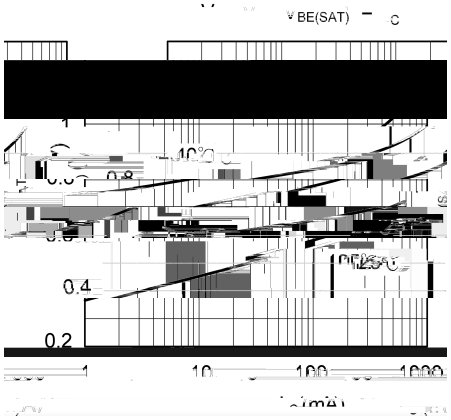

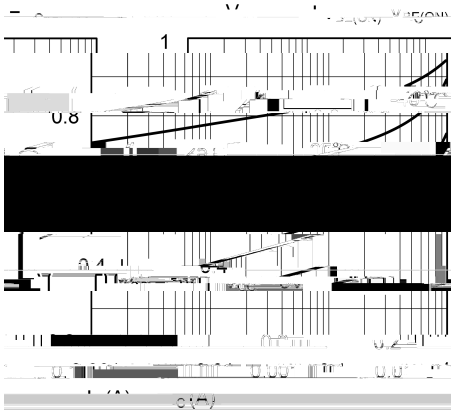


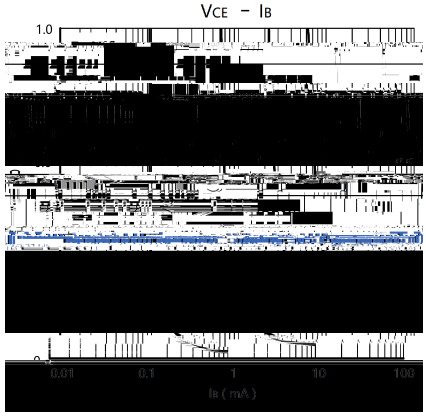

/ Package Dimensions

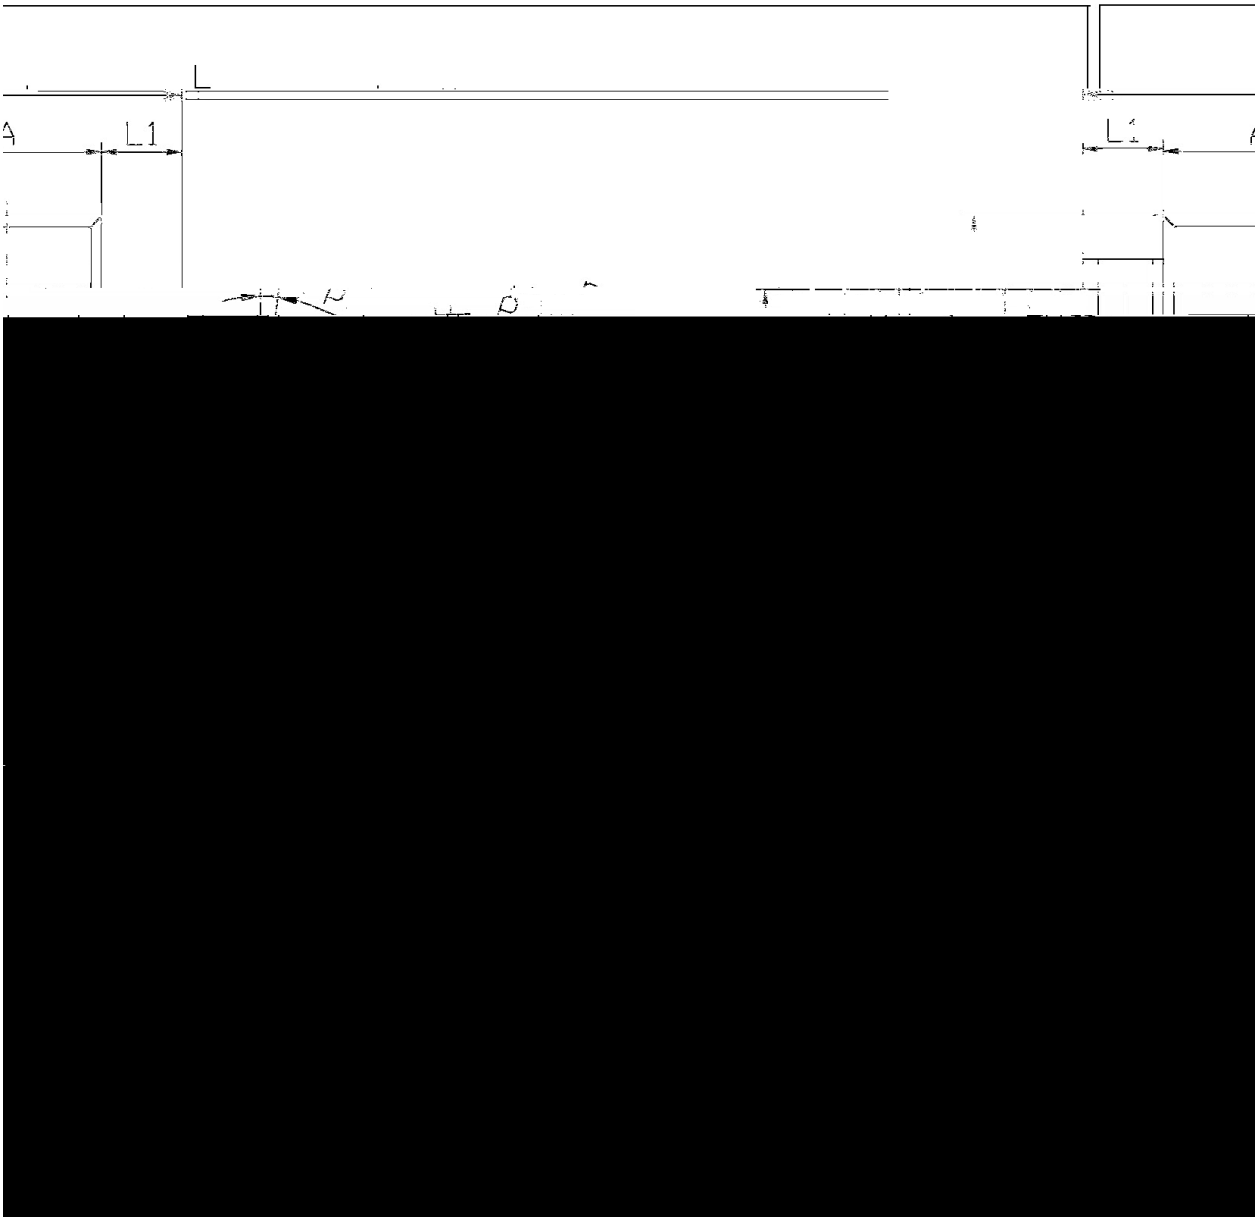

/ Marking Instructions

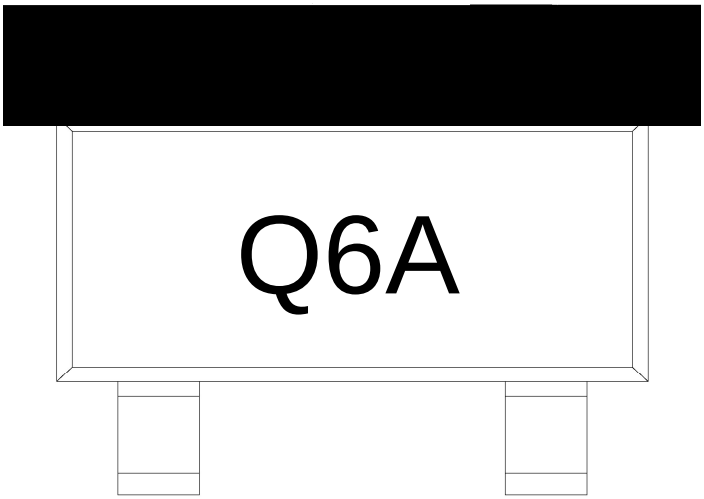

Q


6A

Note:

Q: Automobile halogen-free product Code

6A: Product Type Code

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

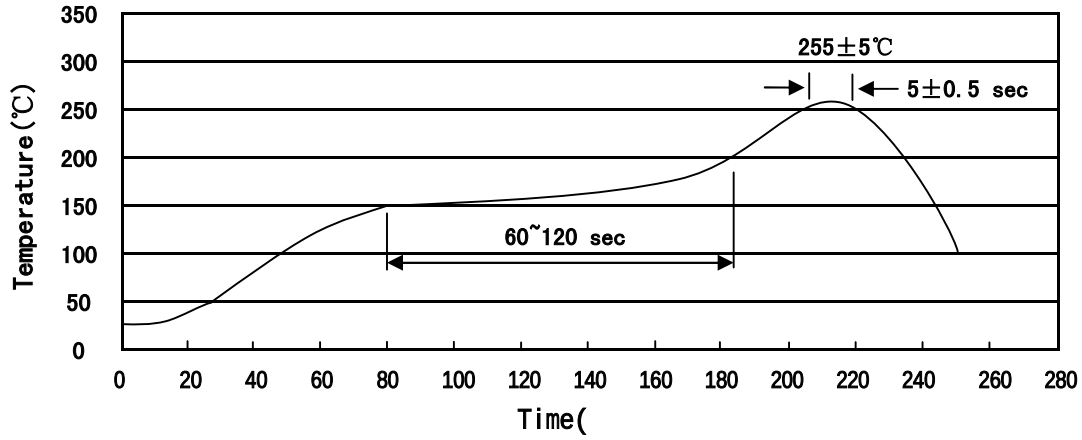

Note:

1		150	200		60	120sec;	1.Preheating:150~200 , Time:60~120sec.
2		255±5				5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3				2	10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat est Conditions

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7″ ×8	180×120×180	390×385×205

/ Notices