/ Descriptions

SOT-89


/ Features

-
-
-
- ±
-
-
-
-
-
-


/ Applications

-
-
-
-
-

/ Equivalent Circuit

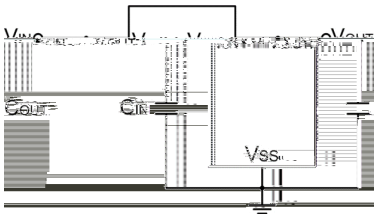

/ Pinning

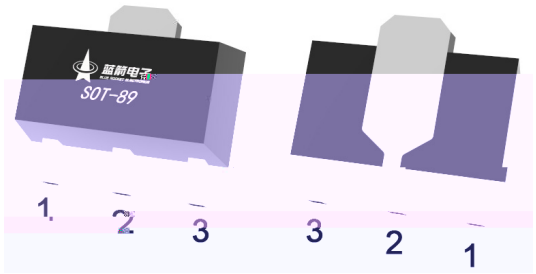

/ Marking


/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(T_A=25 , V_{IN}=V_{OUT}+2V, C_{IN}=C_{OUT}=1uF, unless otherwise specified)


		≤ ≤				
		≤ ≤				
		≤ ≤				

BRCO7550HT


/ Typical Application Circuit

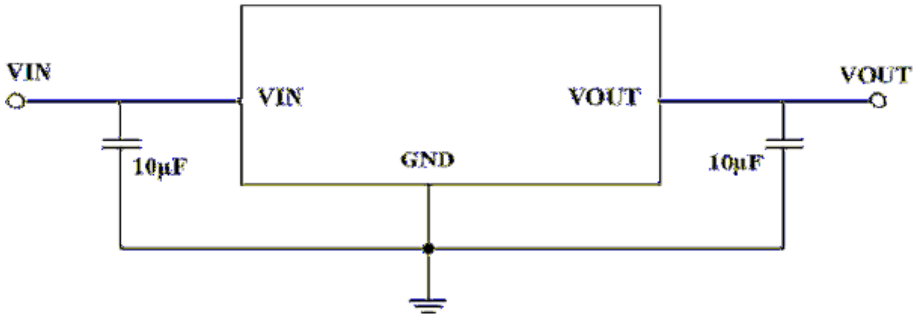


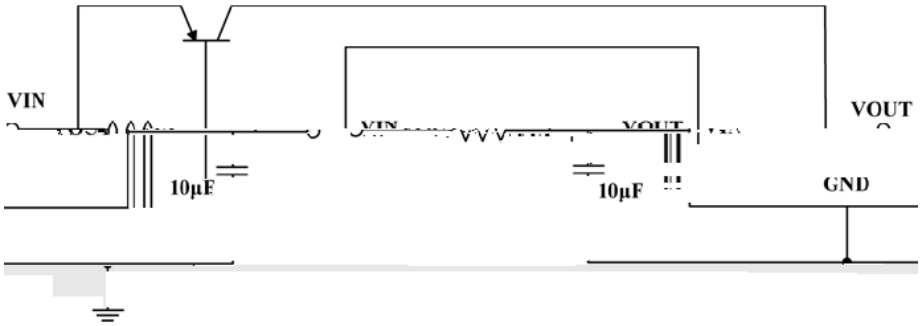


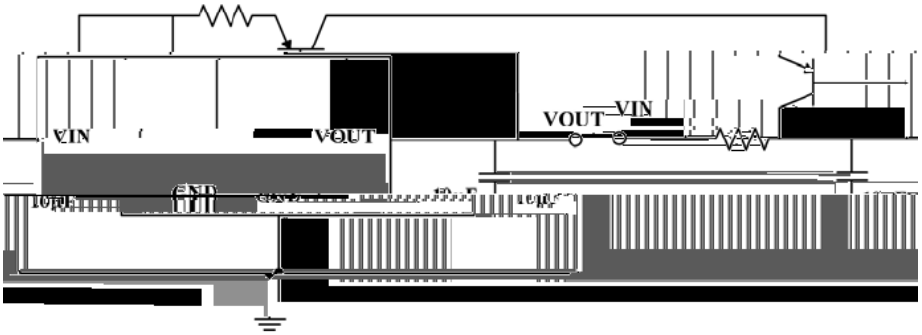


/ Typical Application Circuit

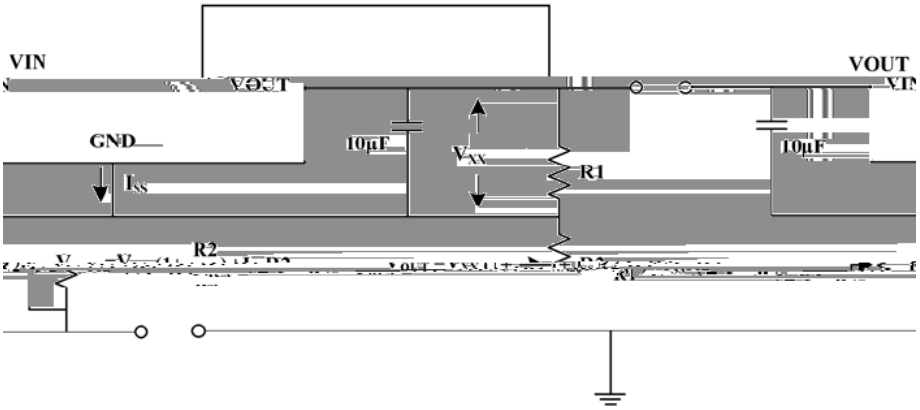

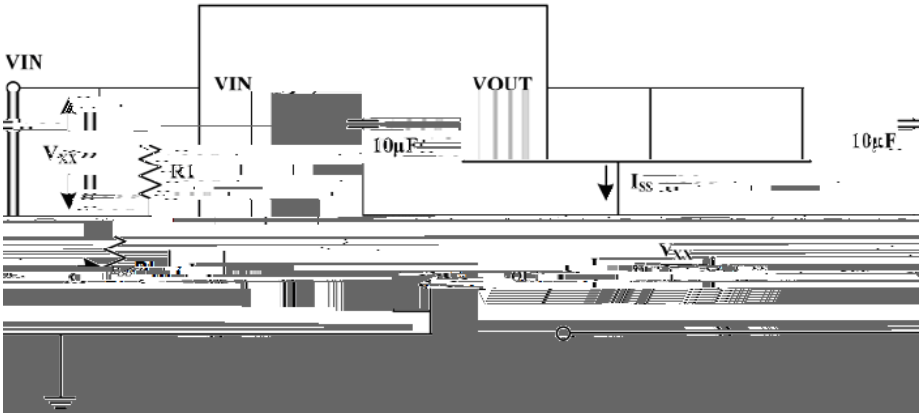


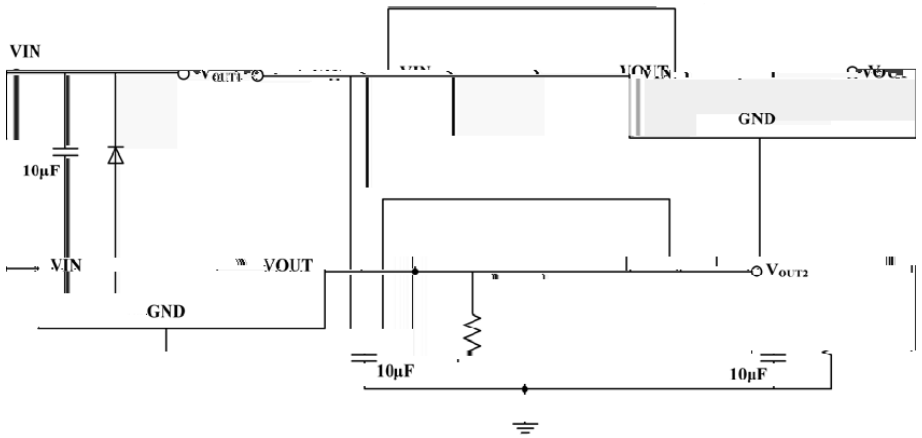

/ Package Dimensions

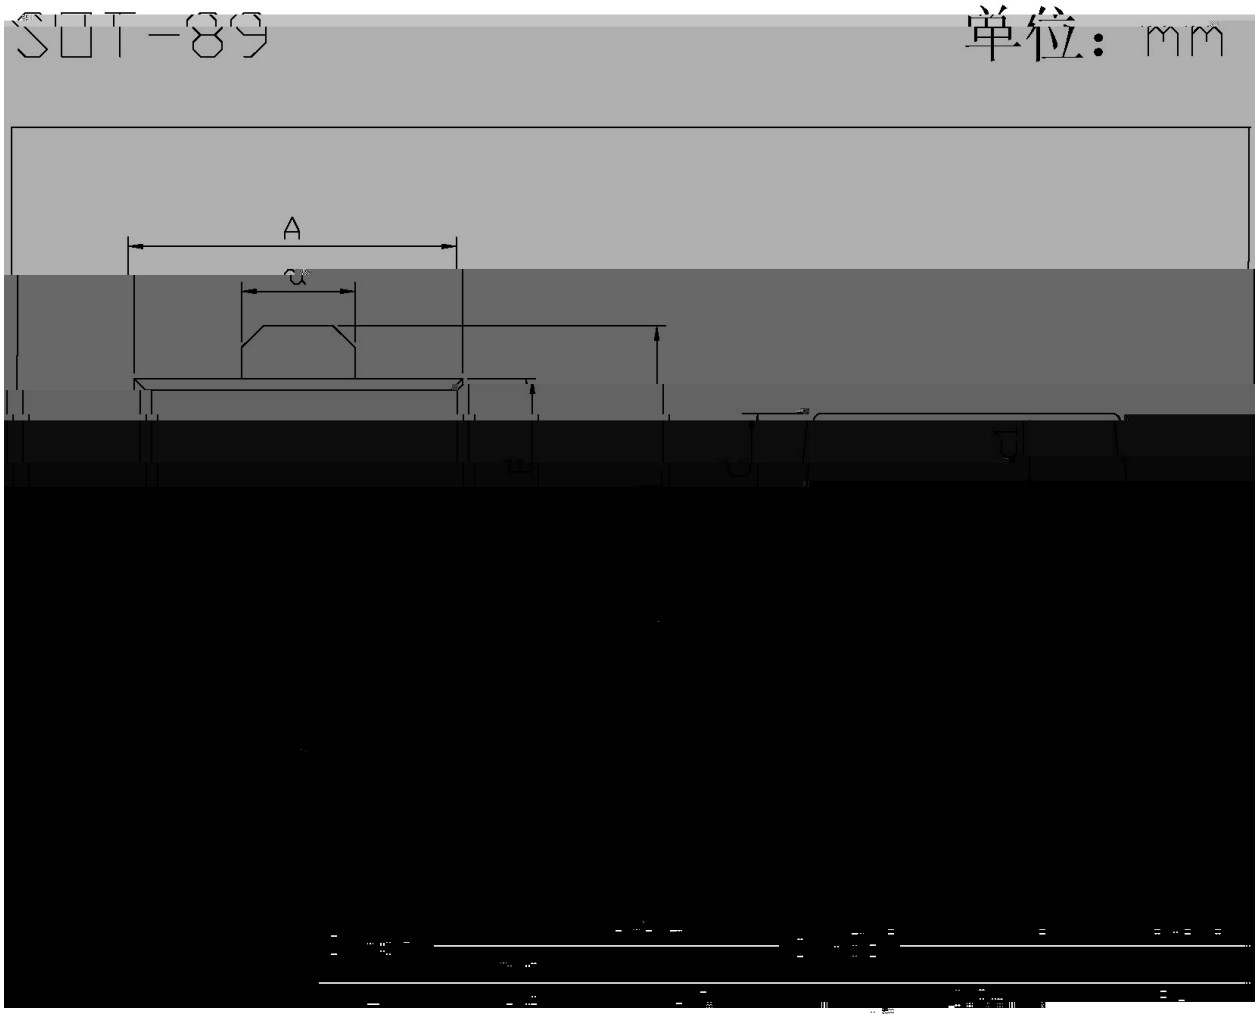

/ Marking Instructions

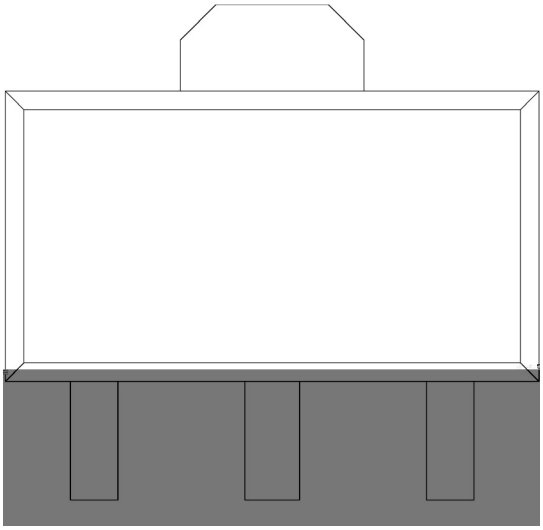

:

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.