/ Descriptions

ṂṂ Ꝉ ᵴ ʃ, ᷒ Ƶ ᶘ

/ Features


≤ Ω Ω

ῆ ꜰ β


/ Applications

ⱺ ḭ Ầ ʜ ⊐ ª ℓ Ꝟ Ⱬ EPV ɔ

/ Equivalent Circuit



/ Pinning

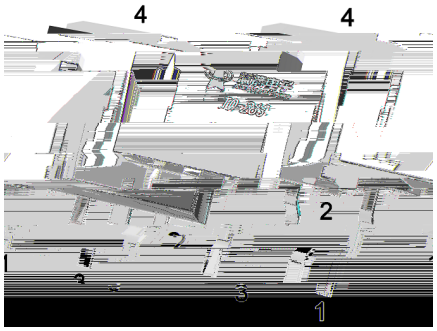

X X X

/ Marking

ð ᴍ ᛘ ب ˝

/ Absolute Maximum Ratings(Ta=25)

v Q		ʎ N	Q Ö	D Ħ
			±	
	≤	θ		ɬ
		θ		


) Ţ


v Q	ʎ N	╨ ;ǂ Ţ	ω ŋ Ö	Ɛ ʒ Ö	ω ᶻ Ö	D Ħ
Drain-Source Breakdown Voltage						
					±	
						Ƒ
						Ω


/ Electrical Characteristics(Ta=25)

v Ϋ̣	ʏ N	⊥ ⌡ː ⊥	ϣ ṇ Θ	Ɛ ʒ Θ	ϣ ᶻ Θ	Ħ ɒ
		Ω Ω				


/ Electrical Characteristic Curve

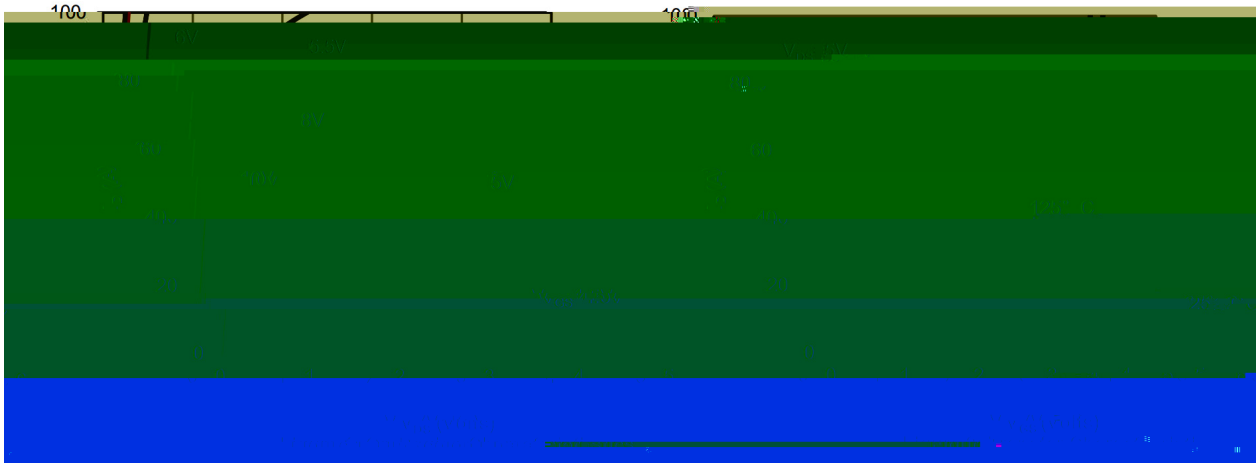

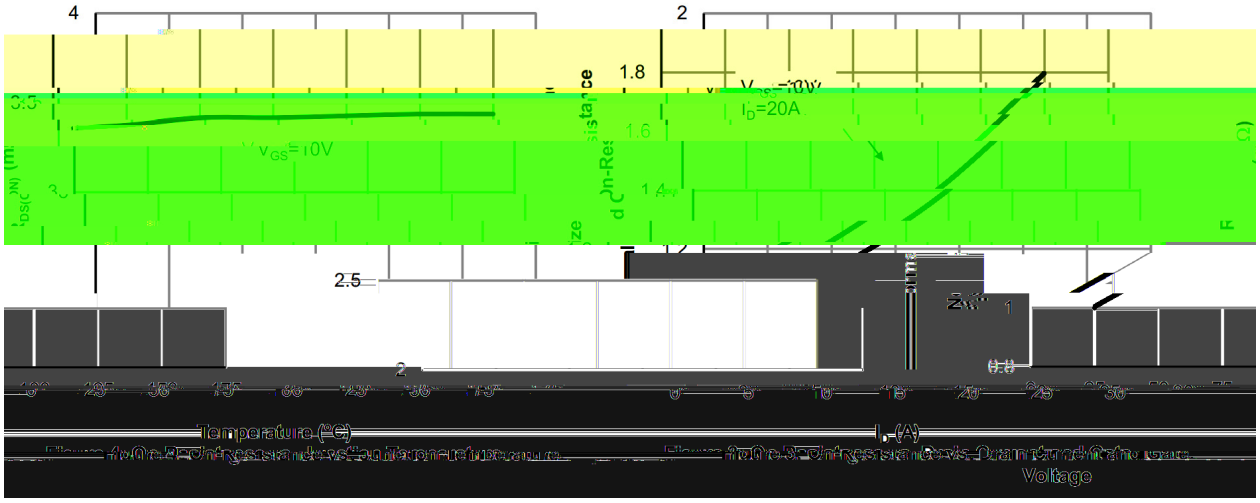


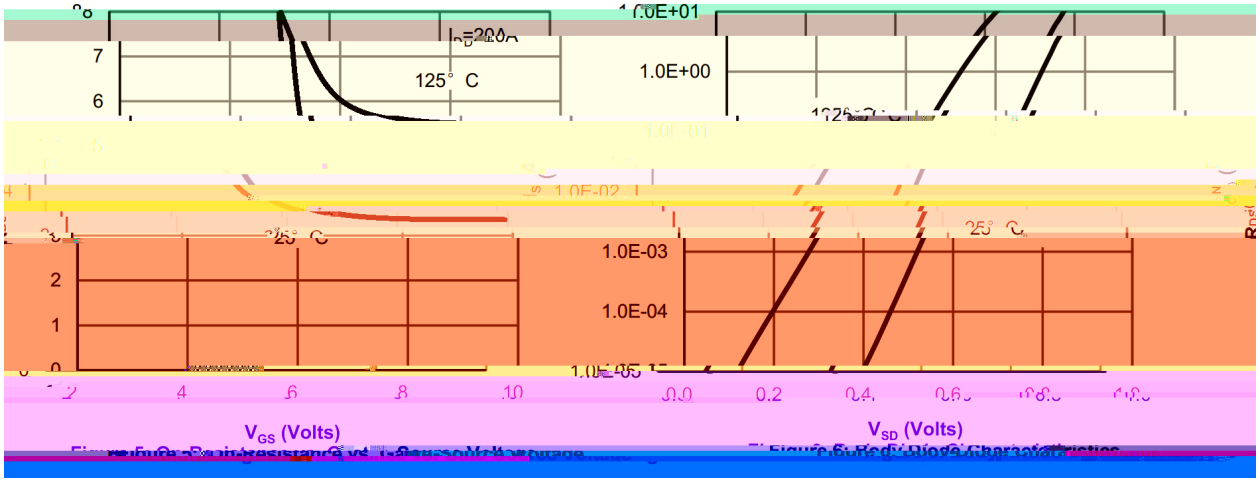


/ Electrical Characteristic Curve

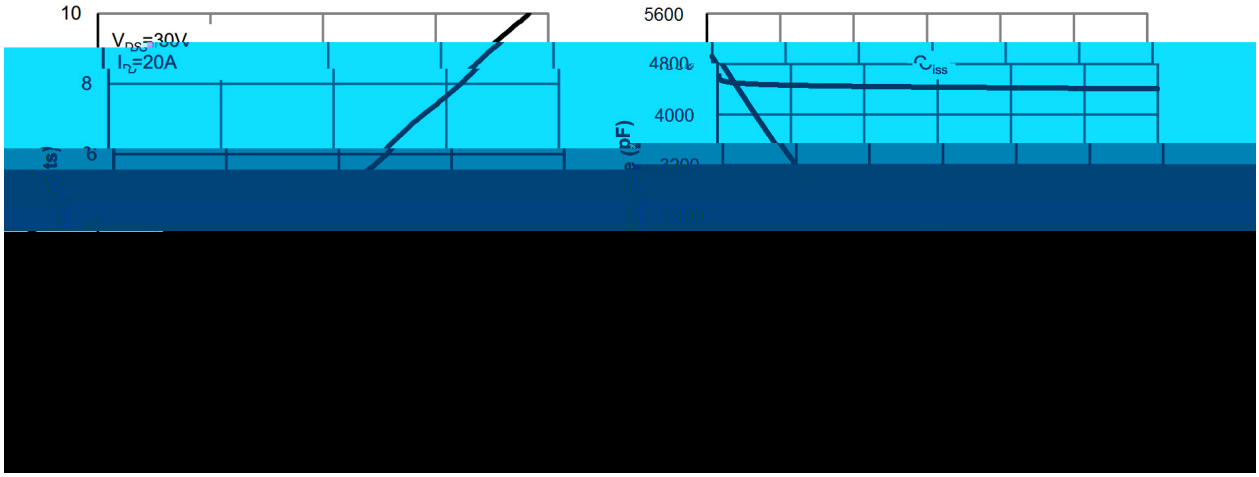



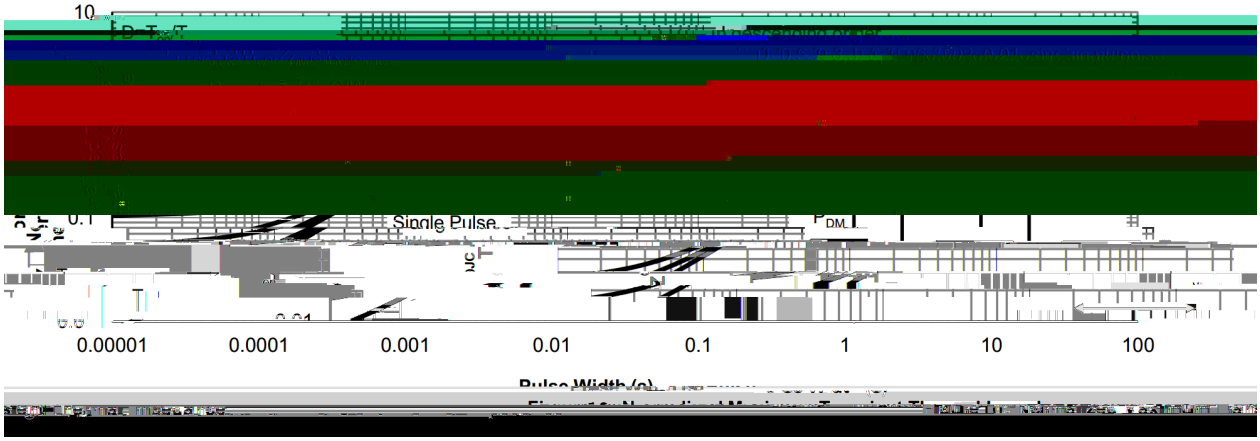


/ Package Dimensions

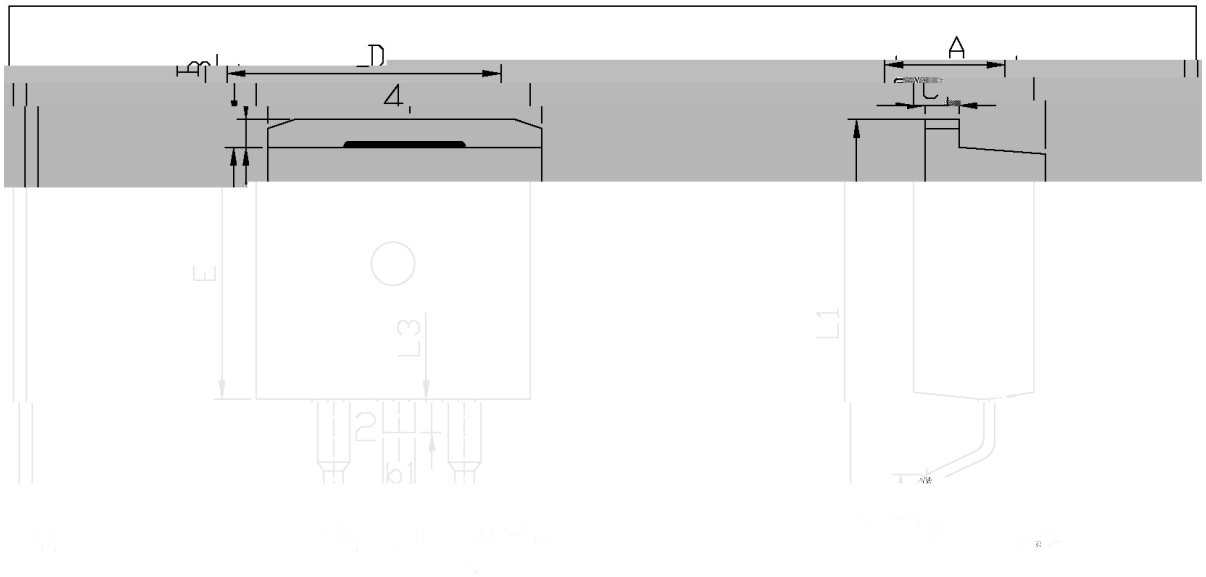

Max		Min	Max	Min
9.40	A	4.30	4.70	9.00
2.74	b	1.00	1.40	2.34
.00	16.00	b1	1.15	1.35	L1	15
2.84					
20	1.60	C	1.20	1.40	L3	1.
		D	9.80	10.20		

/ Marking Instructions

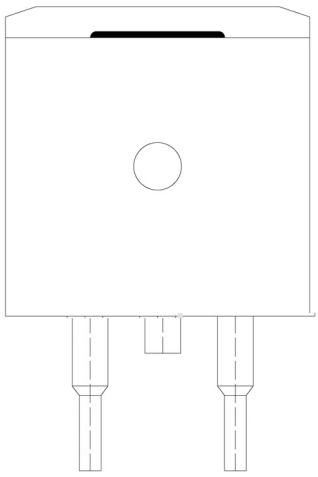

ِ ˝ χ

EU χ ѭ ϗ И Ґђ

368Q39VK χ ѭ ϳ N Ґђ

---- χ ѭ ı ғ ӈ N Ґђ ı ҿ ı ғ ӈ N Ψ ҏ

BRCS035N06SHBD