

/ Descriptions

×

≤ Ω Ω

≤ Ω Ω



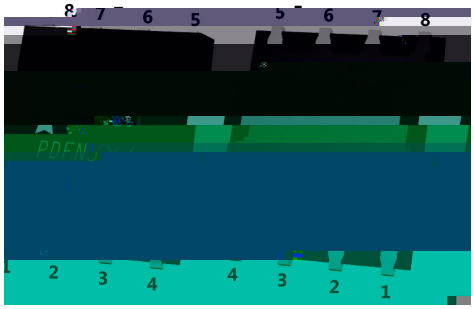

/ Marking

			±	
	≤	θ		
		θ		

		μ				
						μ
					±	
		μ				
						Ω


Ω

/ Electrical Characteristics(Ta=25)

		Ω Ω				


/ Electrical Characteristic Curve



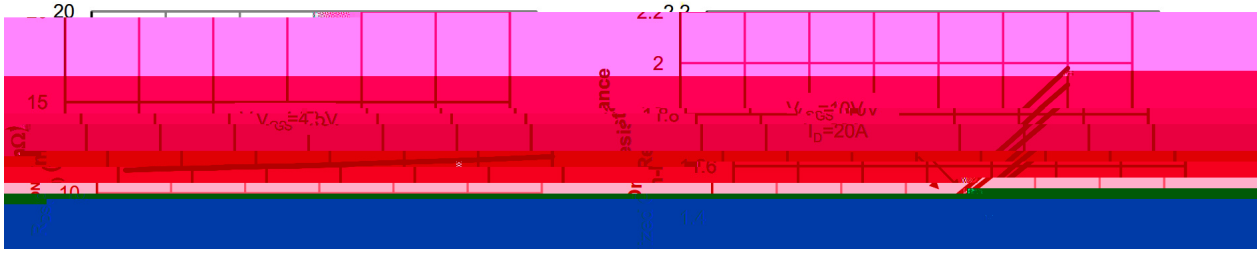

/ Package Dimensions

PDFN5×6 Unit:mm

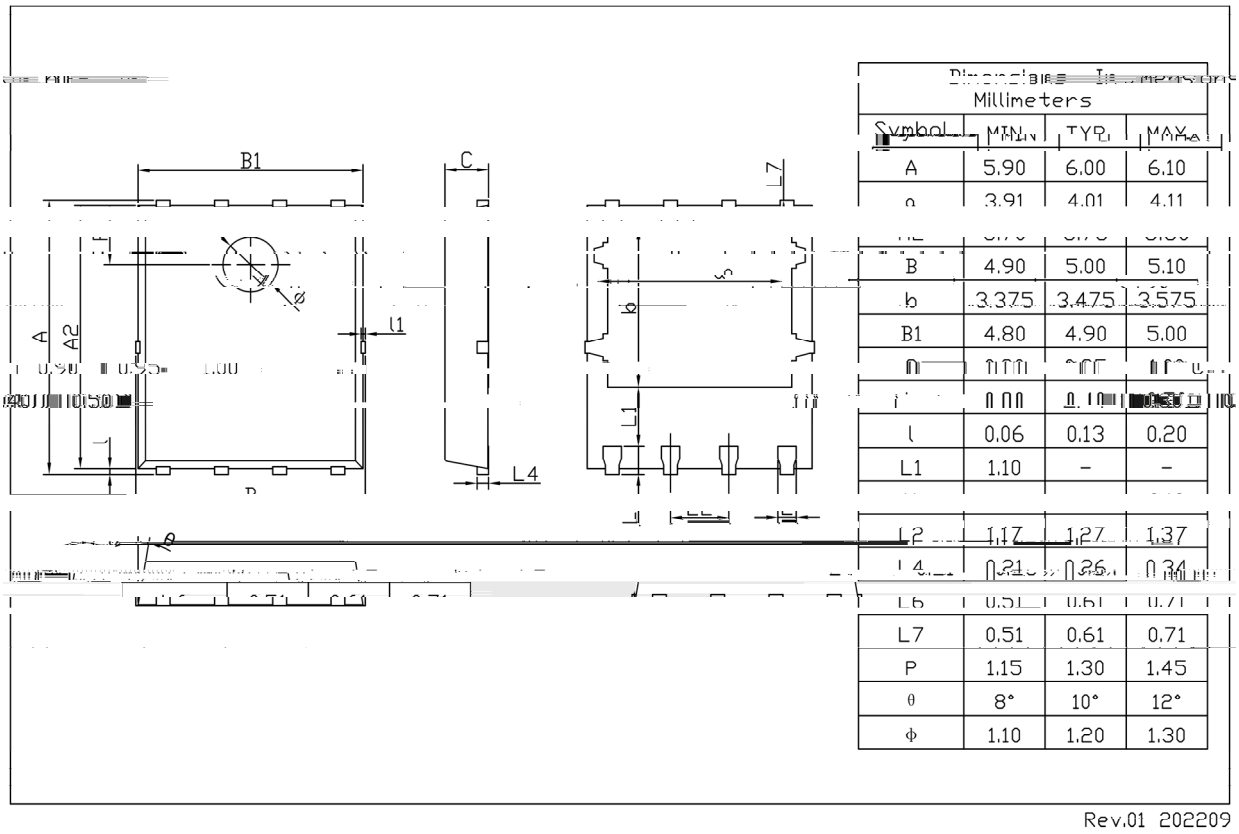

Symbol	Millimeters MIN	TYP	MAX
A	5.90	6.00	6.10
[illegible]	3.91	4.01	4.11
B	4.90	5.00	5.10
b	3.375	3.475	3.575
B1	4.80	4.90	5.00
[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]
l	0.06	0.13	0.20
L1	1.10	–	–
[illegible]	[illegible]	[illegible]	[illegible]
L2	1.17	1.27	1.37
L4	0.21	0.26	0.34
L6	0.51	0.61	0.71
L7	0.51	0.61	0.71
P	1.15	1.30	1.45
θ	8°	10°	12°
Φ	1.10	1.20	1.30

Rev.01 202209

/ Marking Instructions



BR

****

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

t2áô%ˆ Àyr 38 ñQ– ”Œ