

TO-252 N MOS N-CHANNEL MOSFET in a TO-252 Plastic Package.

Fast switching, low on resistance, low gate charge, low reverse transfer capacitances.

Used in various power switching circuit for system miniaturization and higher efficiency .








PIN1 G PIN 2 D PIN 3 S PIN 4 D

See Marking Instructions.

Rev.A Nov.-2017

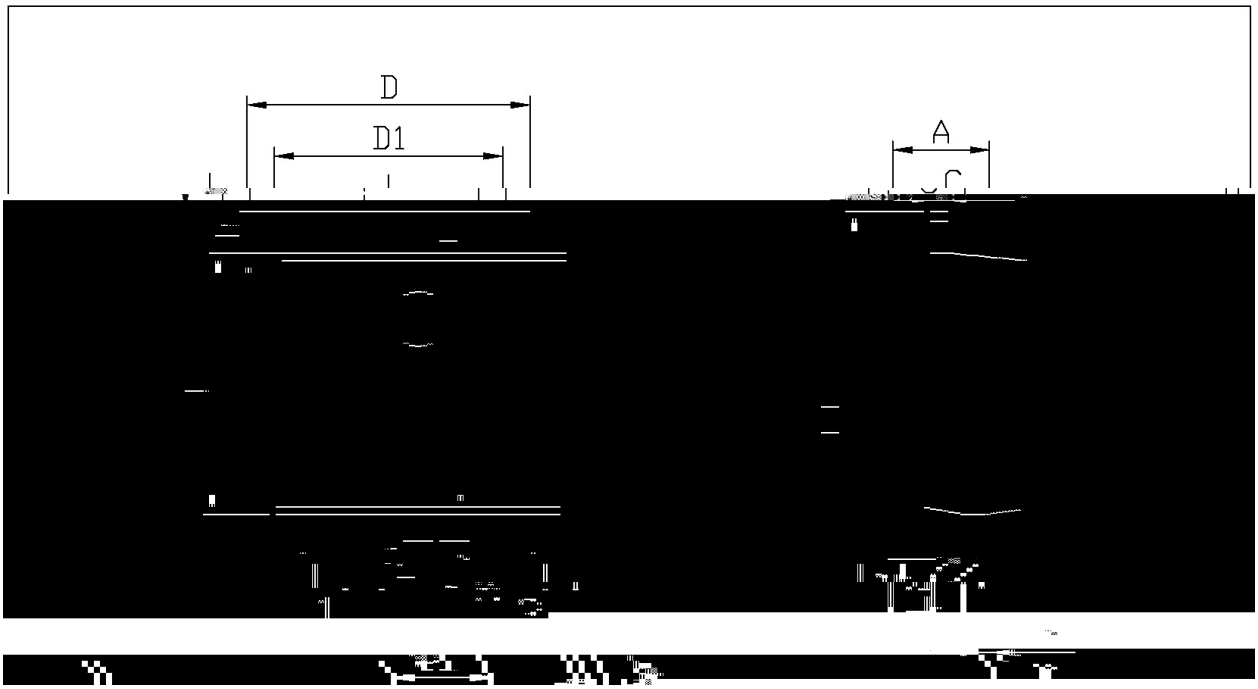
D
D1
A

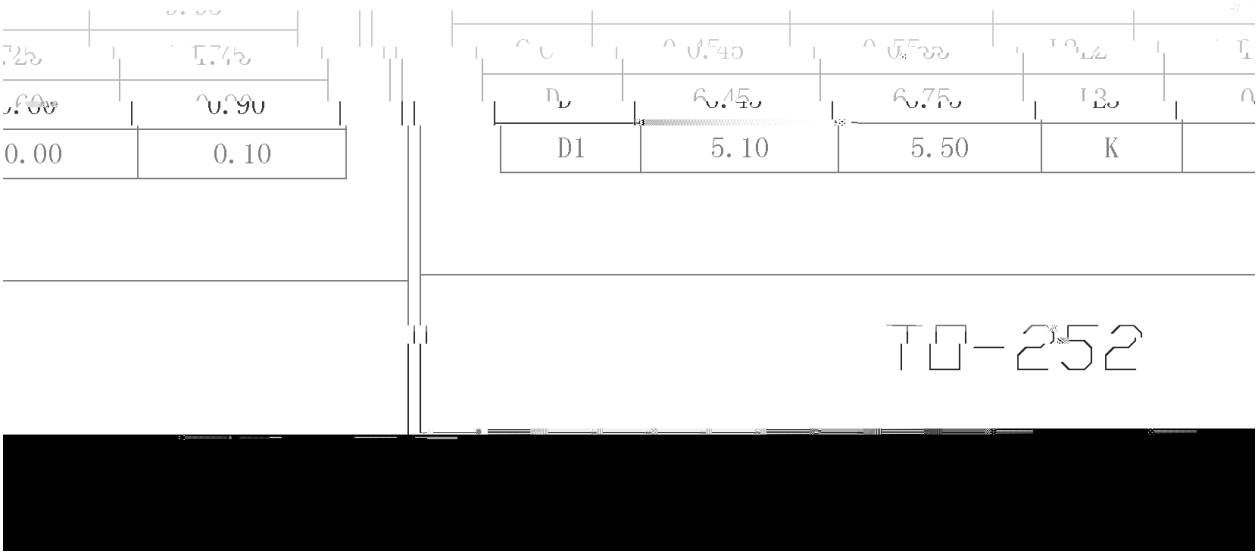
0.00
0.10
D1
5.10
5.50
K
TO-252

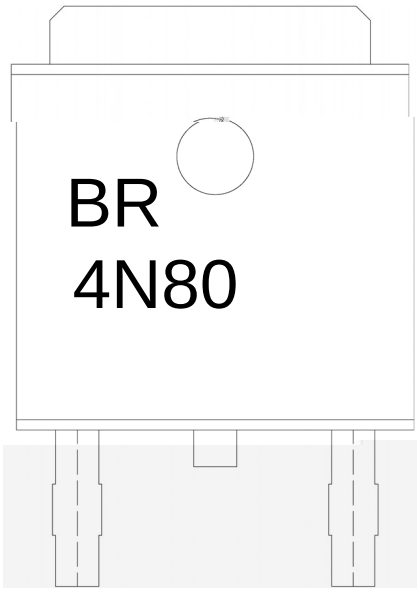


BR

4N80

Note:

BR:	Company Code
4N80:	Product Type.
****:	Lot No. Code, code change with Lot No.

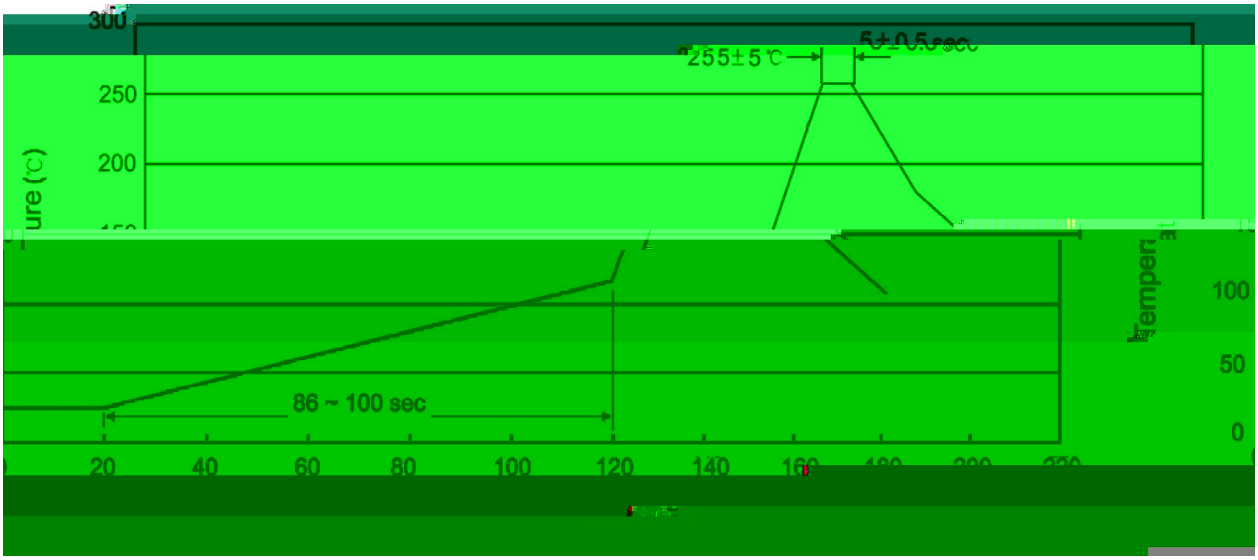

					Note:
1		25	150	60	90sec;
2		255	5	5	0.5sec;
3					

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255 5 , Duration:5 0.5sec.