N TO-252


N-CHANNEL MOSFET in a TO-252 Plastic Package.

$U_{GV+rq,}$ H, F_{uvv}

Low $R_{DS(on)}$,low gate charge, low C_{rss}, fast switching. Halogen-free Product.

H, DC/DC

Suited for low voltage applications such as automotive, DC/DC Converters, and high efficiency switching for power management in portable and battery operated products.





PIN1 G PIN 2 D PIN 3 S PIN 4 D

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	20	V
Drain Current	I_D(Tc=25)	60	A
	I_D(Tc=100)	50	A
Drain Current - Pulsed	I_{DM}	210	A
Gate-Source Voltage	V_{GS}	±12	V
Avalanche Current	I_{AS}	18.3	A
Avalanche energy L=0.5mH	E_{AS}	268	mJ
Power Dissipation	P_D(Tc=25)	100	W
	P_D(Tc=100)	50	W
Junction and Storage Temperature Range	T_j T_{stg}	-55 150	
Maximum Junction-to-Ambient Steady-State	$R_{\theta JA}$	62	0024

N

Parameter Symbol

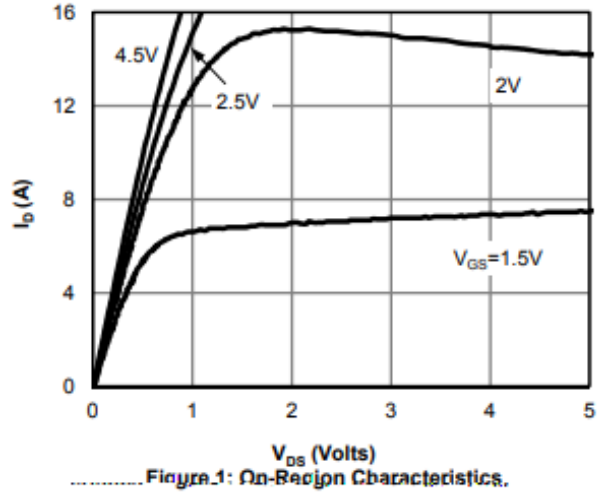
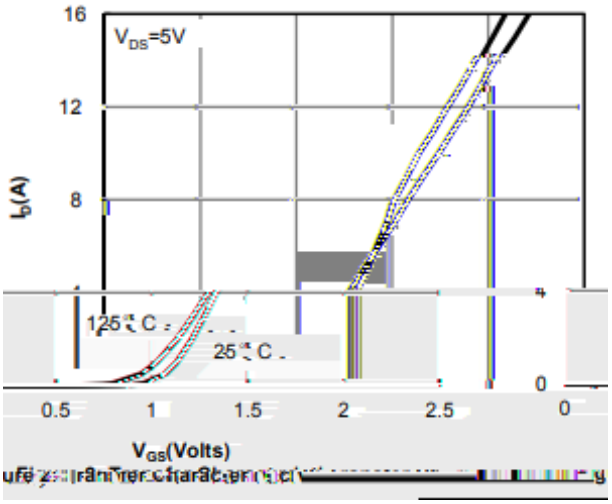


Figure 1: On-Region Characteristics.



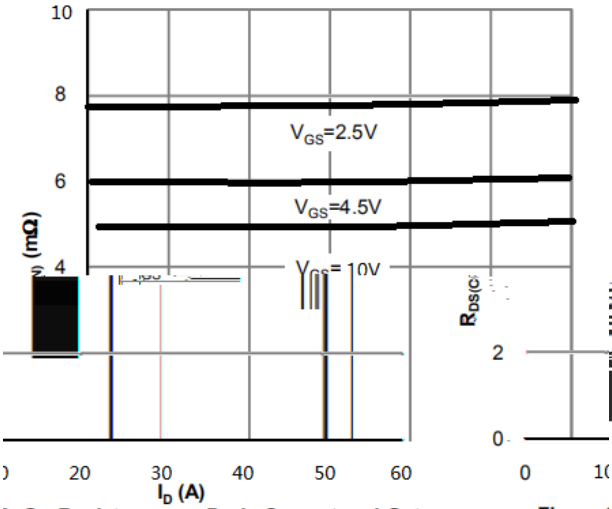


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

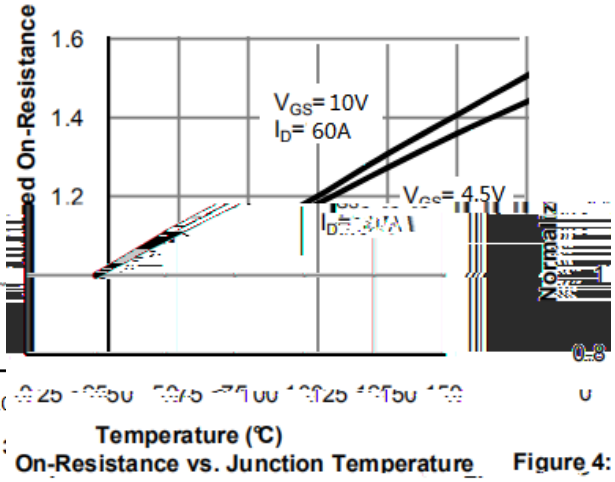


Figure 4: On-Resistance vs. Junction Temperature

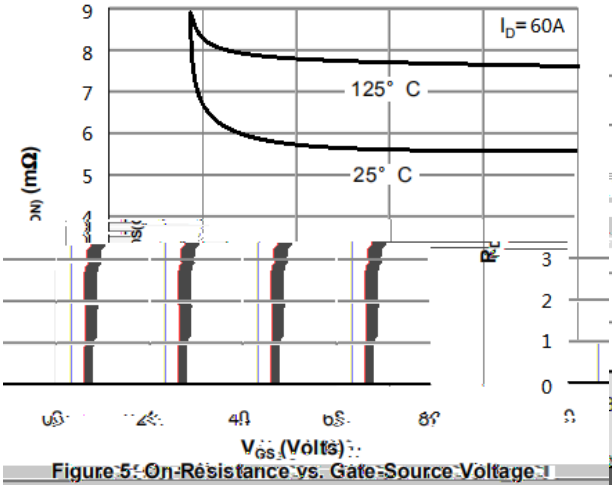
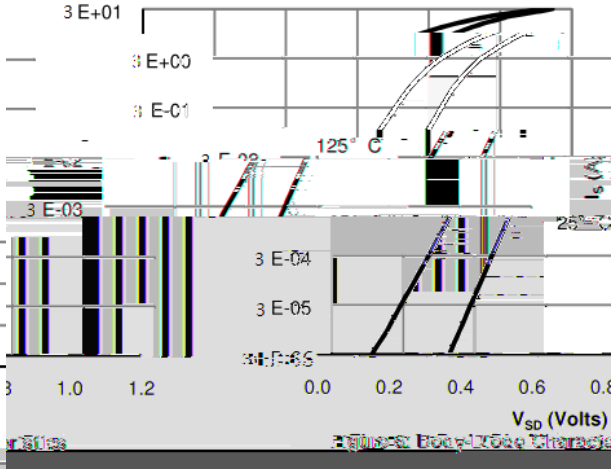


Figure 5: On-Resistance vs. Gate-Source Voltage



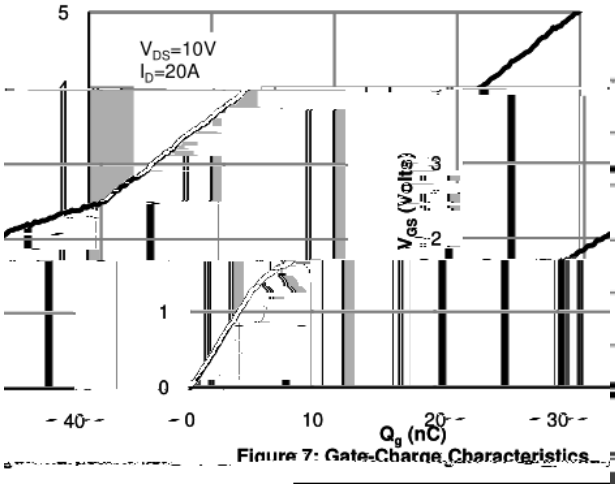


Figure 7: Gate-Charge Characteristics




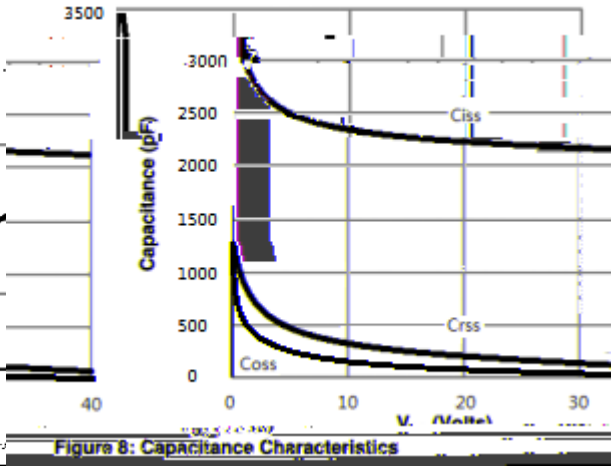


Figure 8: Capacitance Characteristics

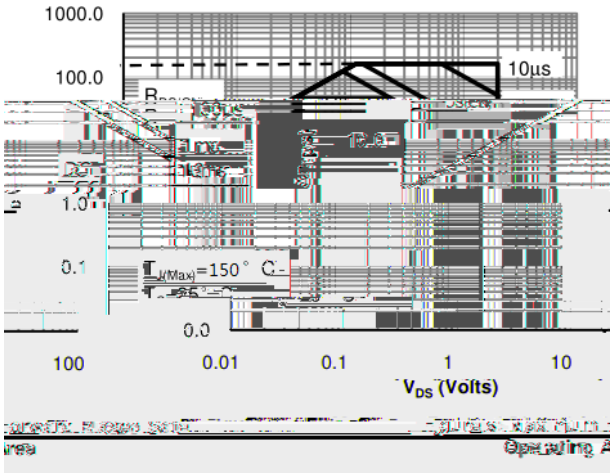

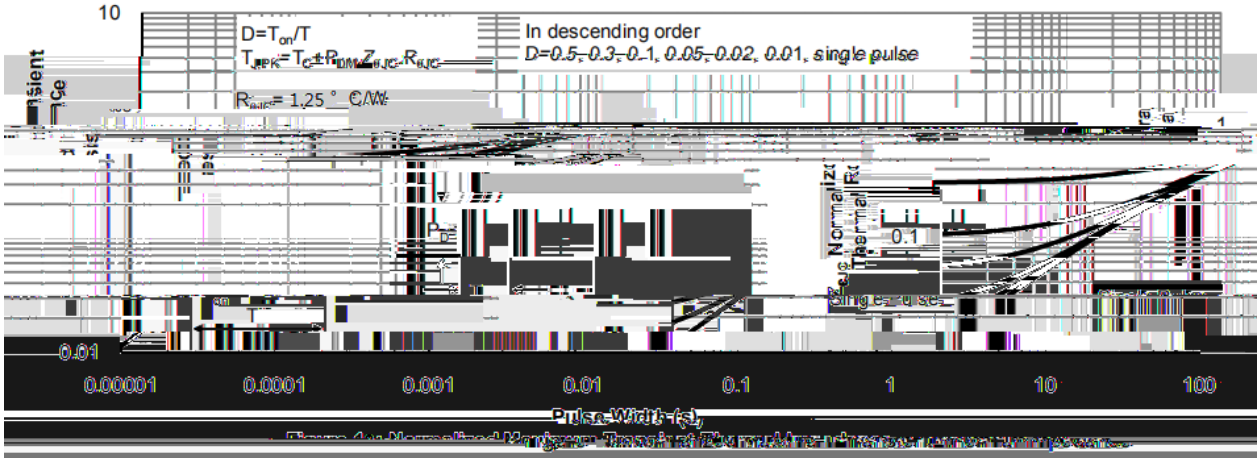

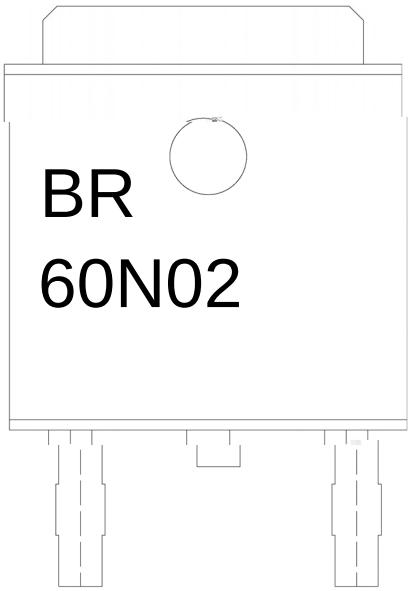

BR	И	
60N02	N	
----	N	N

Note:

BR:	Company Code
60N02:	Product Type Code.
****:	Lot No. Code, code change with Lot No.