
/ Descriptions

/ Features


2KV

/ Applications

/ Equivalent Circuit





/ Pinning

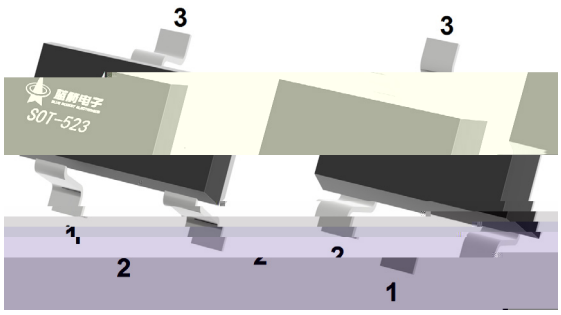


/ Marking


/ Electrical Characteristic Curve

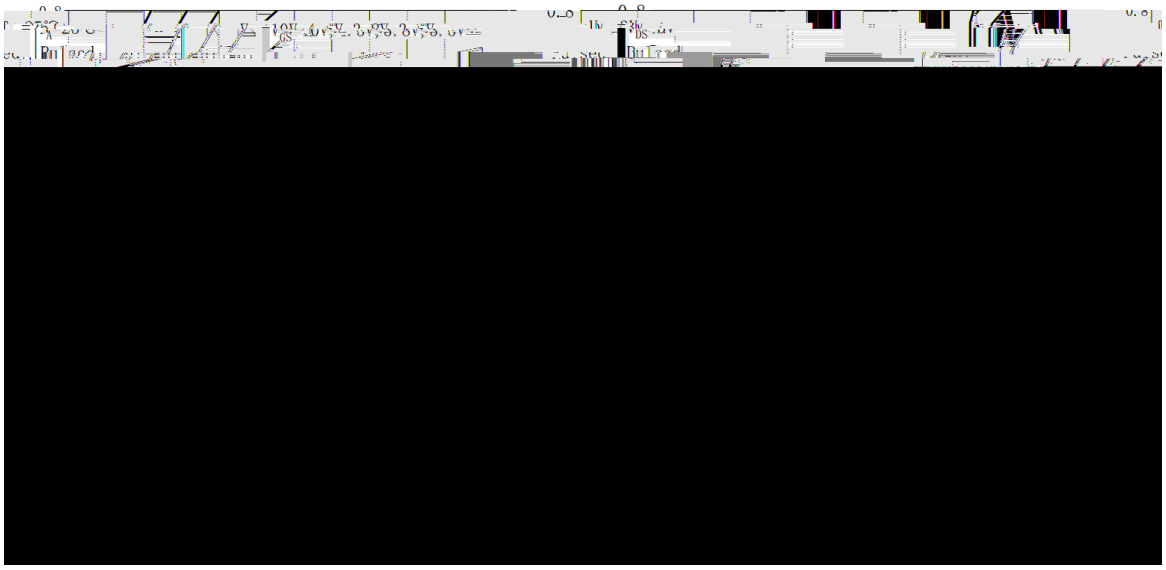


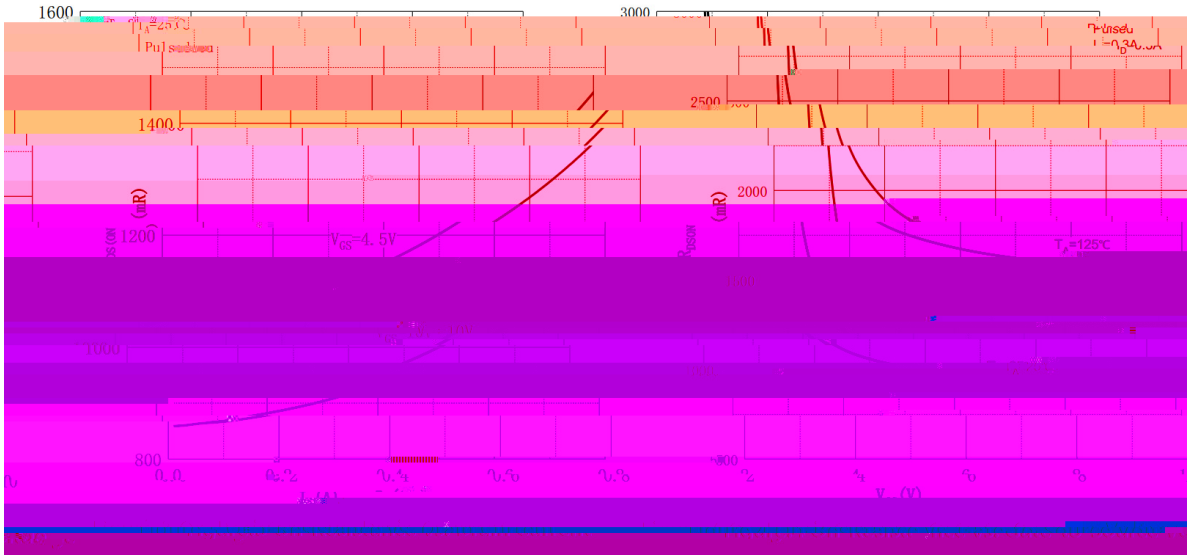

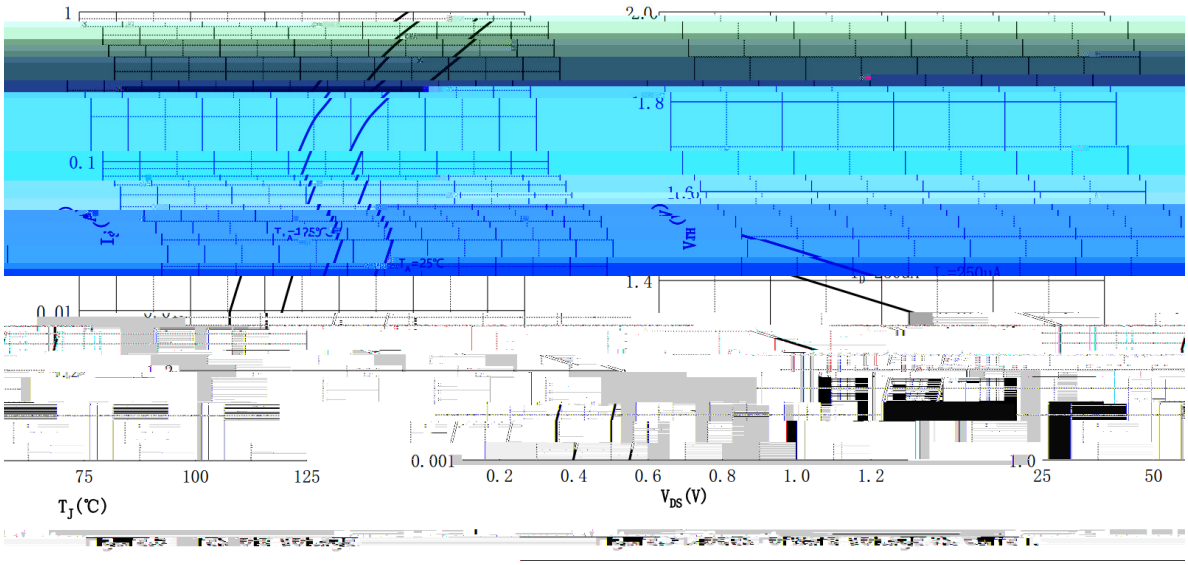


/ Package Dimensions

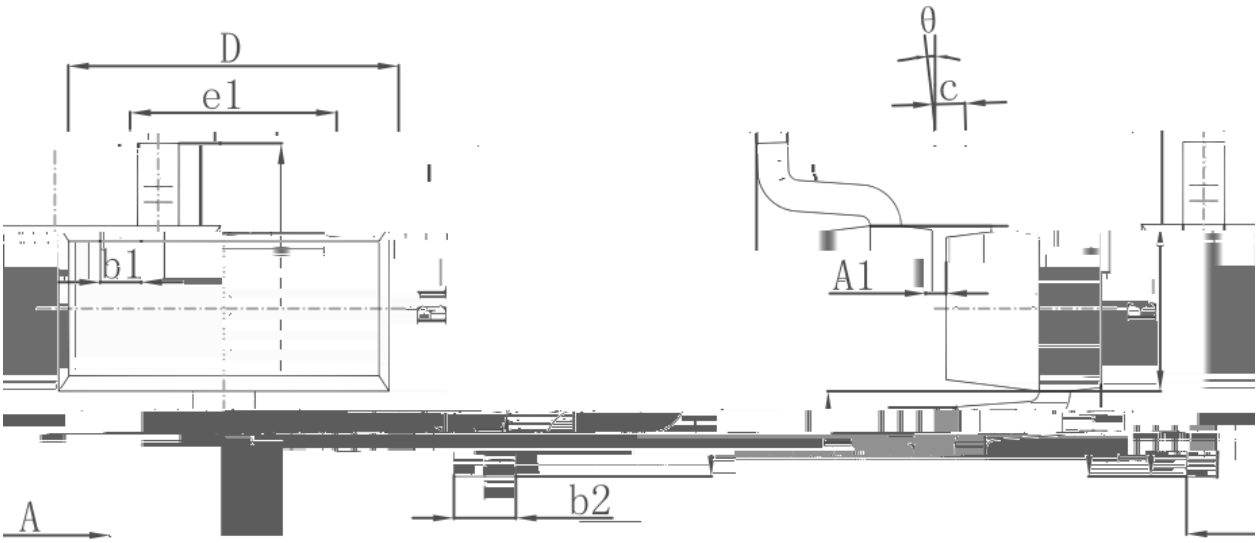

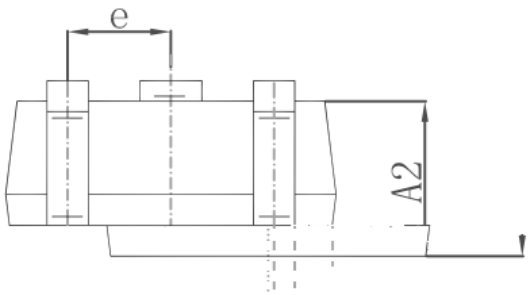


Inches		Symbol	Dimensions In Millimeters		Dimensions In	
Max.			Min.	Max.	Min.	
0.035		A	0.700	0.900	0.028	
[illegible]	[illegible]	A1	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	A2	0.700	0.800	0.028	0.031	
[illegible]	[illegible]	b1	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	b2	[illegible]	0.250	[illegible]	[illegible]
0	0.004	c	0.008	[illegible]	0.100	0.20
[illegible]	[illegible]	D	[illegible]	[illegible]	[illegible]	[illegible]
0.035	[illegible]	E	0.700	0.900	0.028	[illegible]
0.069	[illegible]	E1	1.450	1.750	0.057	[illegible]
[illegible]	[illegible]	e	0.500 TYP.		[illegible]	0.020 TY
0.043	[illegible]	e1	0.900	1.100	0.035	[illegible]
[illegible]	[illegible]	L	0.400 REF.		[illegible]	0.016 RE
0.018	[illegible]	L1	0.260	0.460	0.010	[illegible]
8°	[illegible]	θ	0°	8°	0°	[illegible]

/ Marking Instructions

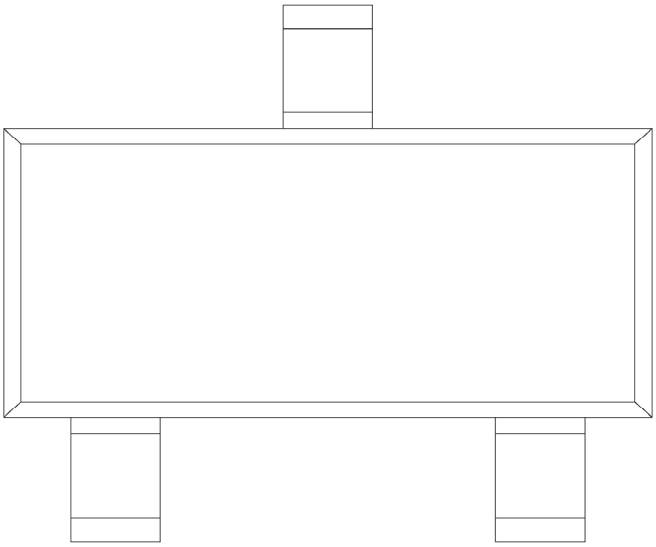

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

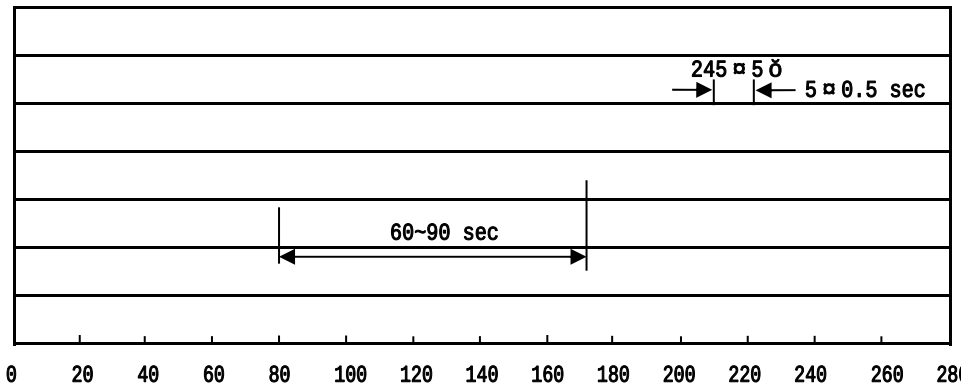

Ń f ЈJ0 ˜Ym

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices