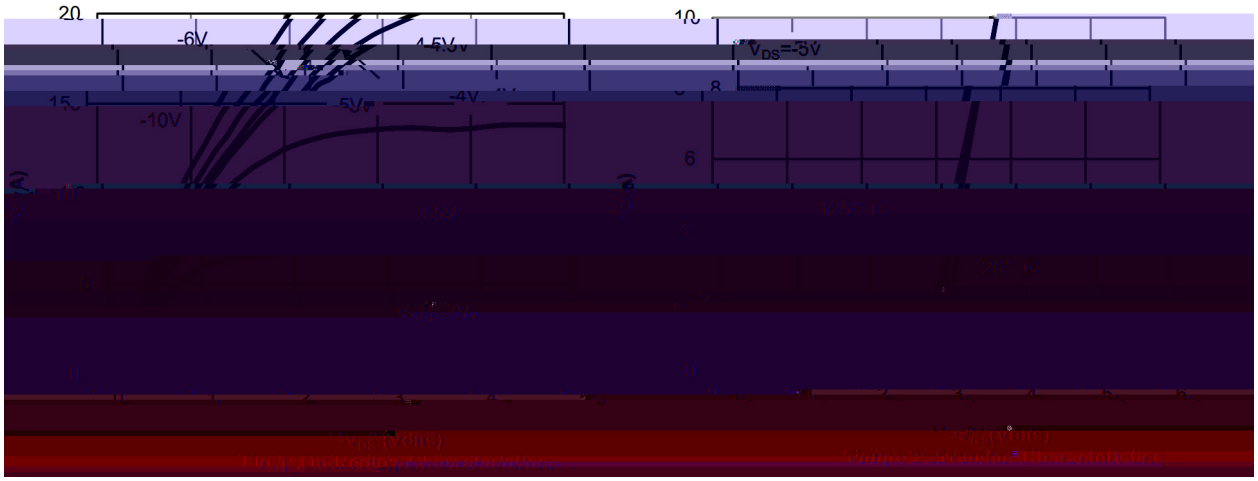
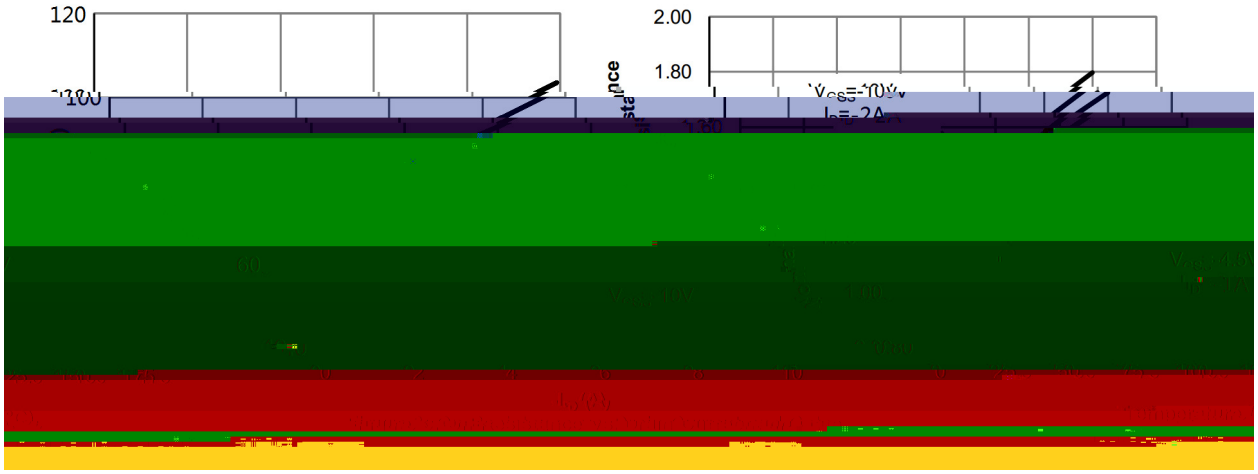
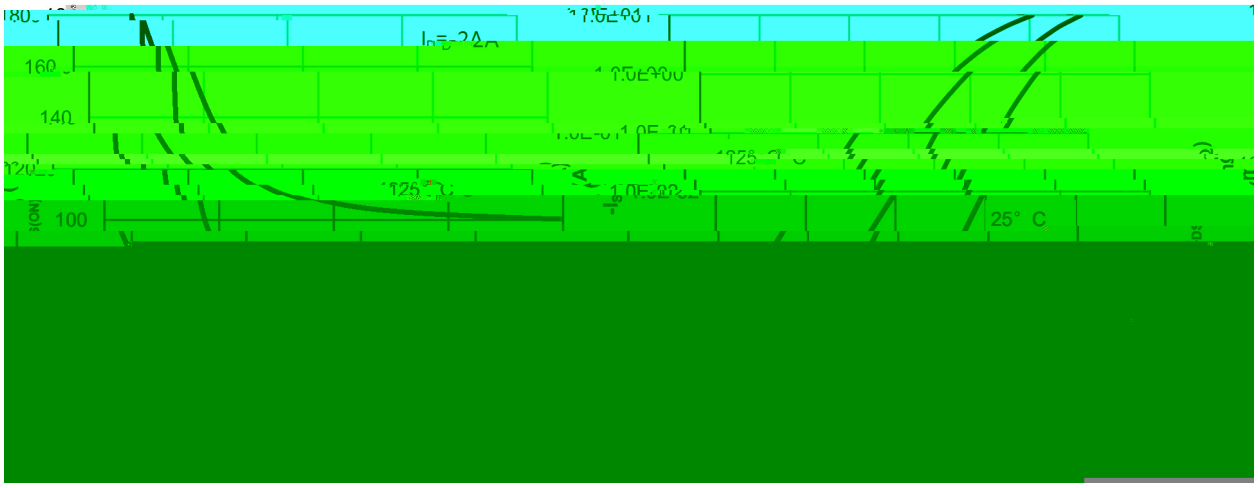
≤				
	≤	θ		
		θ		

		μ				
		μ				
						Ω
						Ω
						μ


-6V
-5V
-4V
-10V
V_{DS}=-5V
6
8


120
100
2.00
1.80


160
140
100
25° C




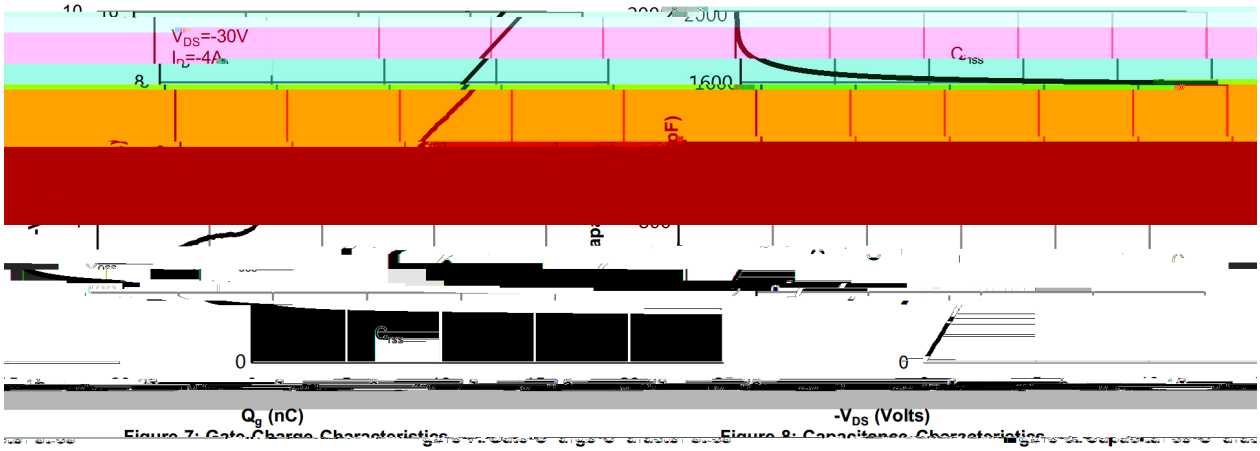



Figure 7: Gate Charge Characteristics

Figure 8: Capacitance Characteristics

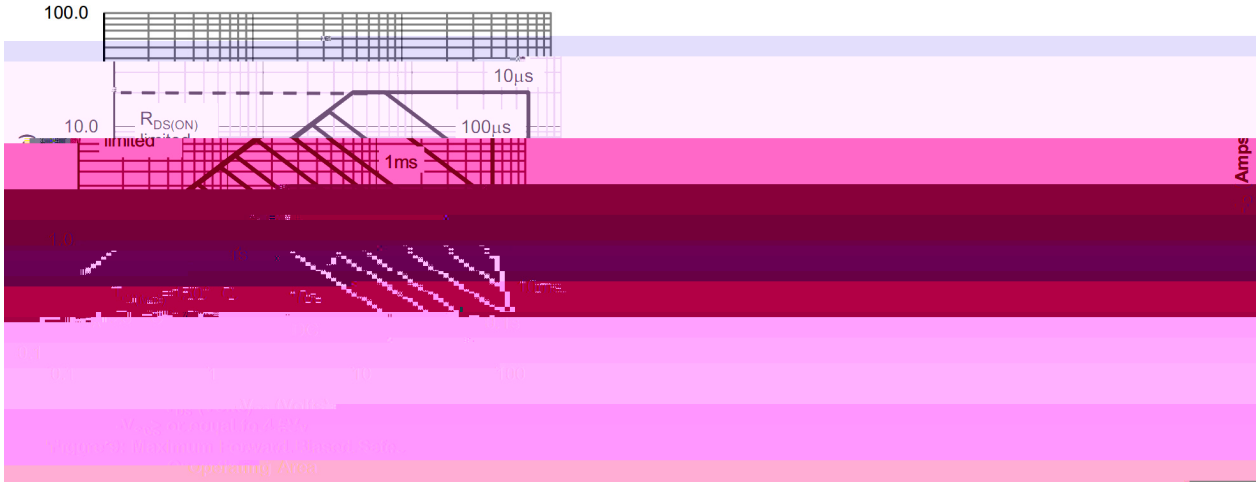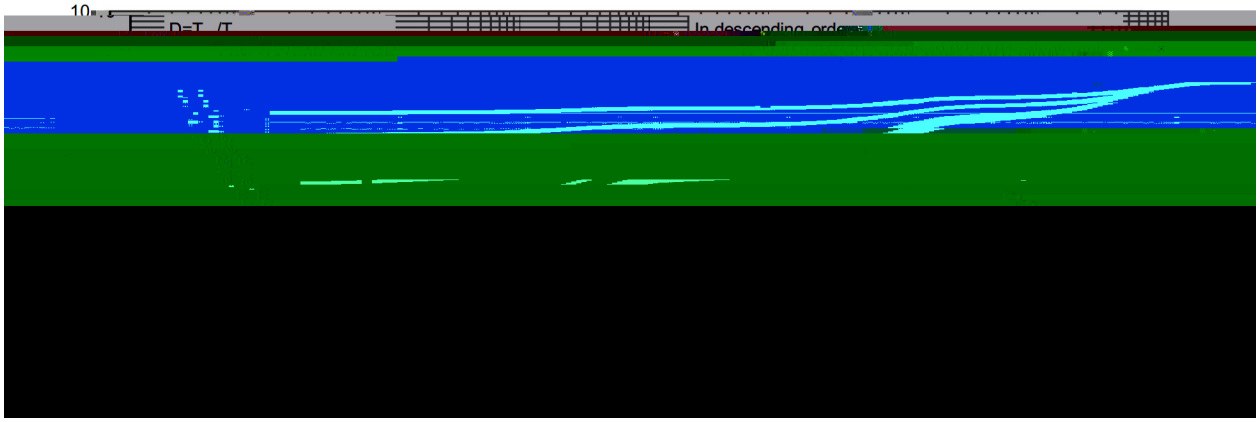

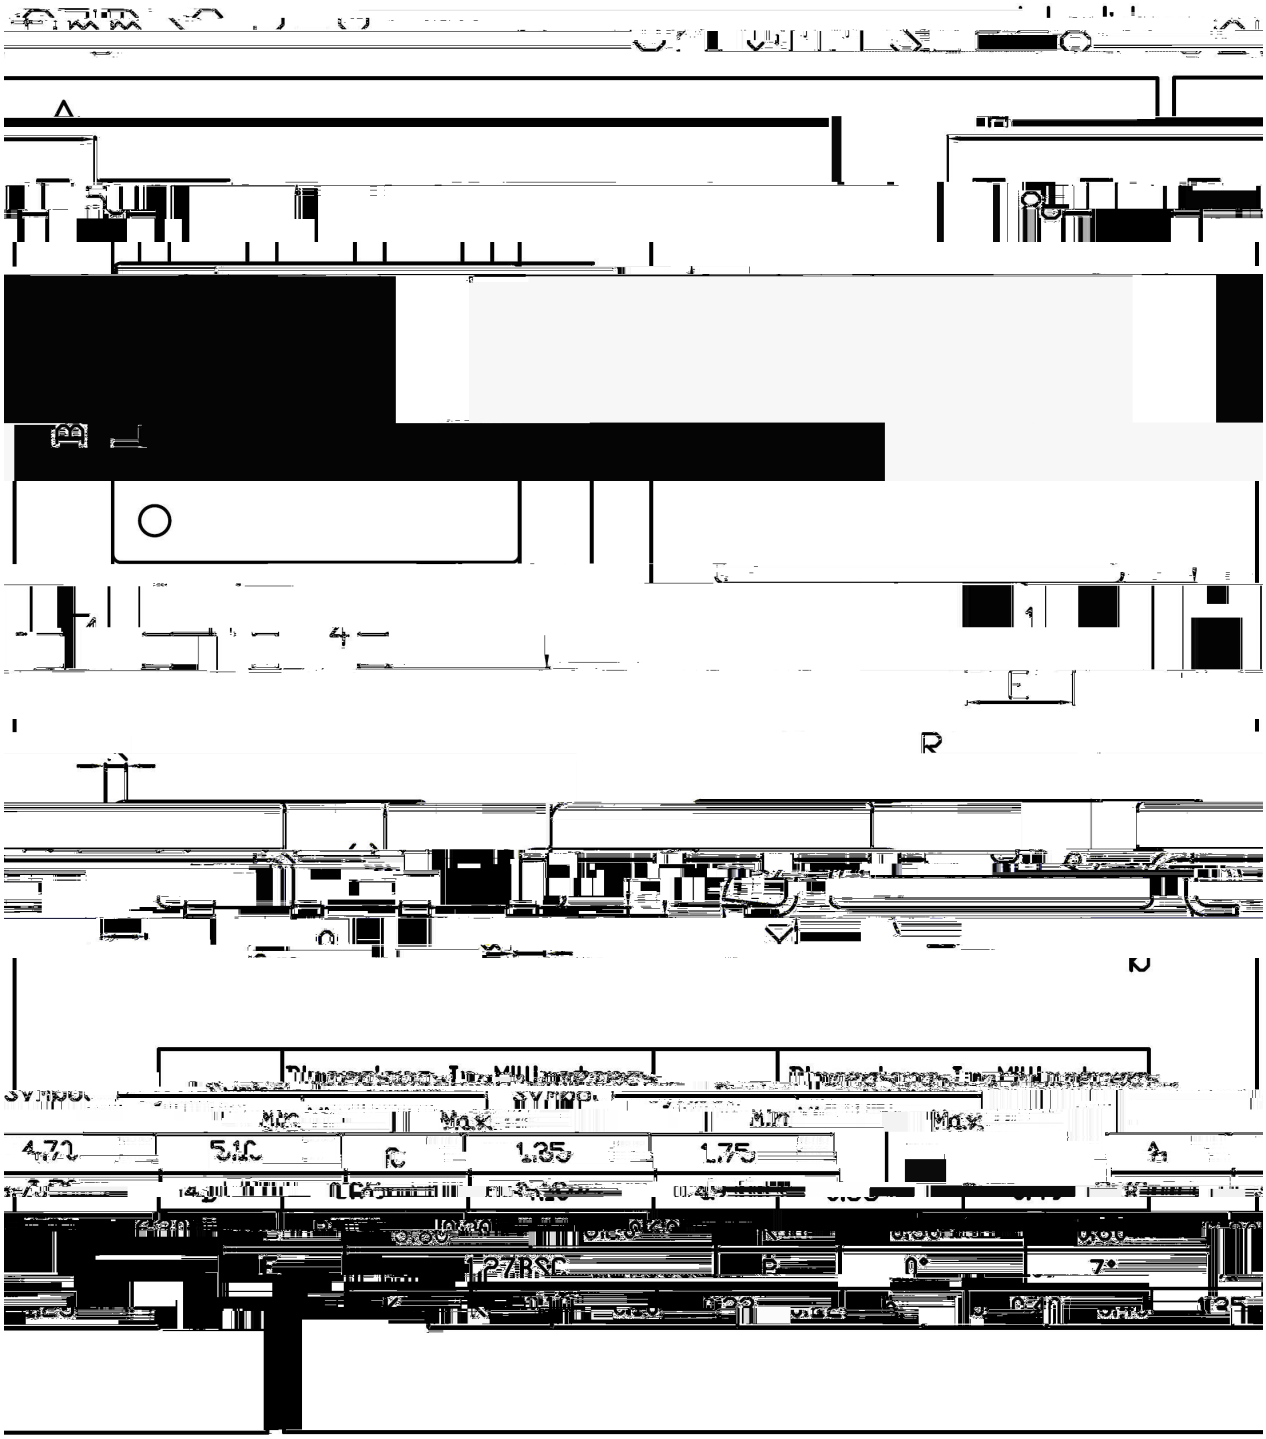


Min
Max
4.72
5.10
1.35
1.75
0°
7°

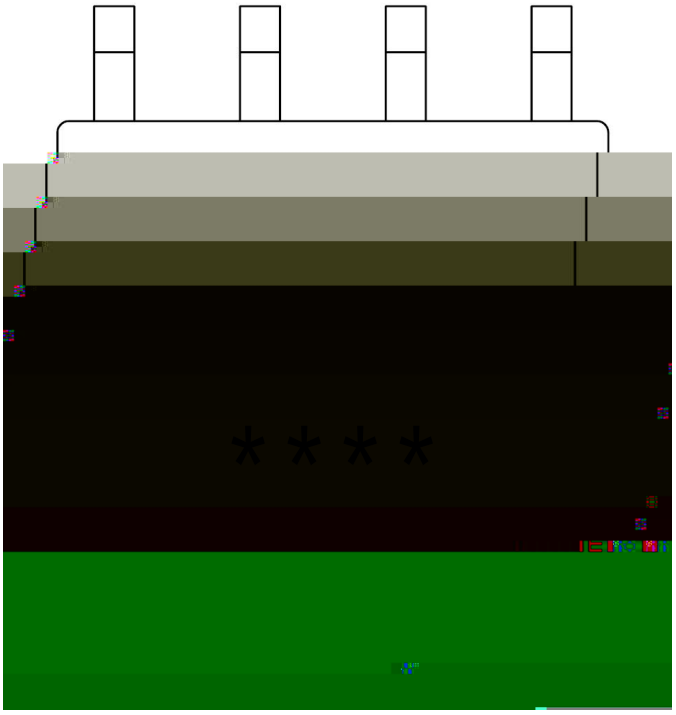

Temperature Profile for IR Reflow Soldering(Pb-Free)
