/ Descriptions

ḾḾ Ŀ ʊ ʃ ѽ Ẓ ٦


/ Features

Ң ɔ U/Ң ɾ ɨ ɔ ķ/Ầ ԋ ѡ ỷ ȏ/ ή ғ β


/ Applications

ᵮ ↗ ļ Ầ ԋ ɔ ◊/ ɔ Ḓ ᶎ ╚ ʜ /XSV ɔ ◊

/ Equivalent Circuit



/ Pinning

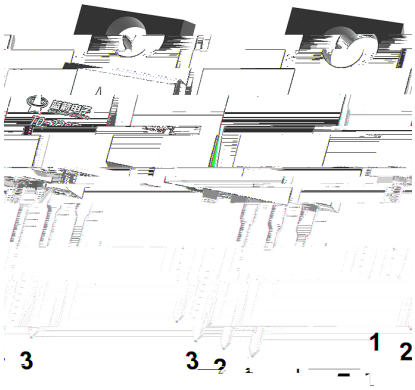

X X X

/ Marking

ȏ м ٧ ب ˝


v ̈Ϙ ϒ N ̈ϘЁ D Ђ

v ̈Ω ヶ N ╨ ˜l ɣ %ﾙ ᴄ ɥ


BRFL25N50

DATA SHEET

/ Package Dimensions

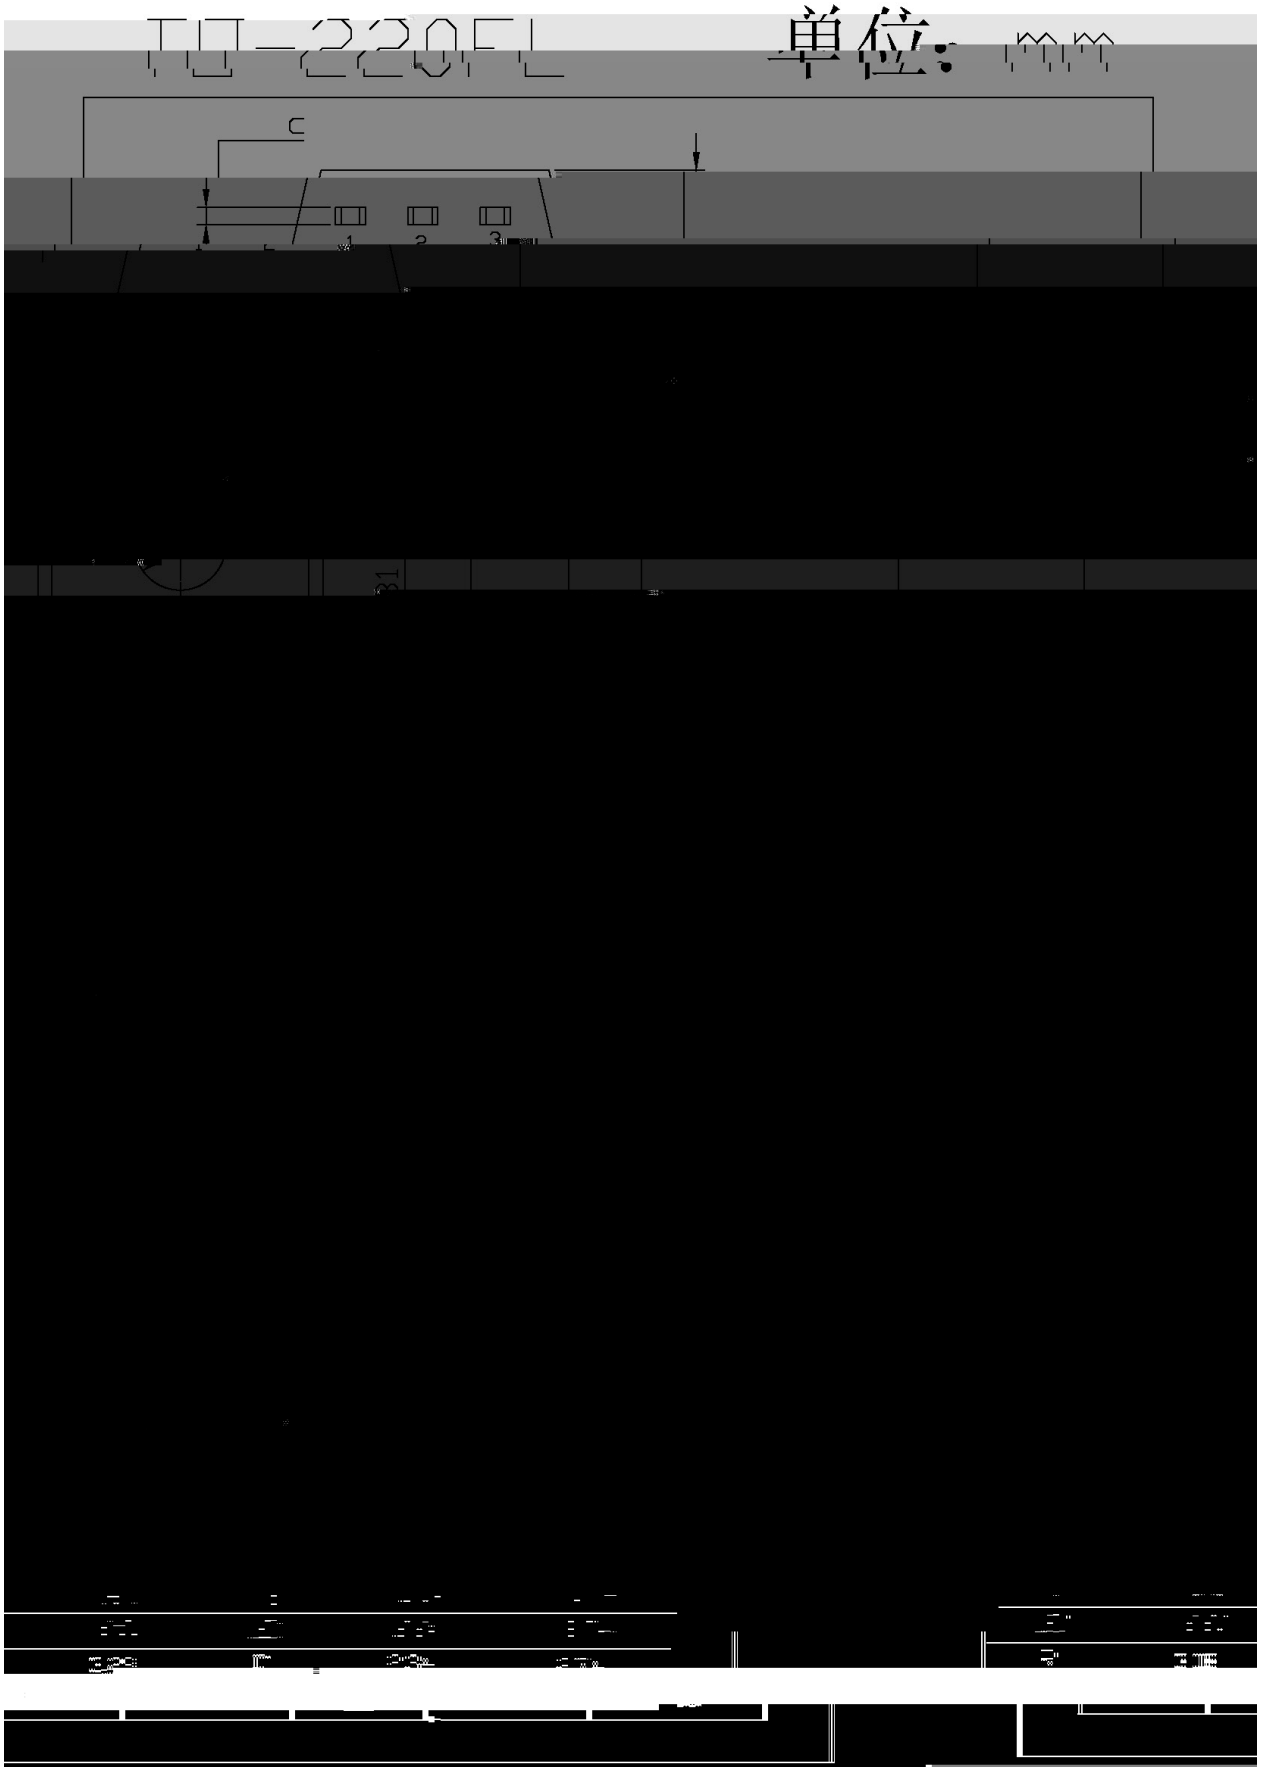

/ Marking Instructions

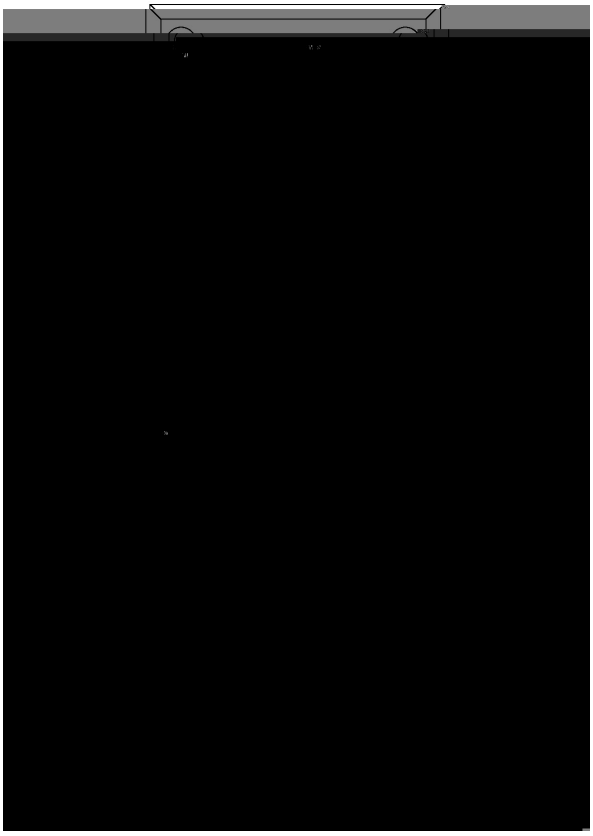

ِ ˝ χ

EU χ ѭ ϗ И Ґђ

58Q83 χ ѭ ϛ N Ґђ

---- χ ѭ ı ғ ӈ̈ N Ґђ ı ҿ ı ғ ӈ̈ N Ψ ҏ

( ) / Temperature Profile for Dip Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.