
"Yت / Descriptions


◕ È / Features

٧ ڍ / Applications

Л ف ٚ ق̃ ≠ ع / Equivalent Circuit



ã ﻉ ٗ ٛ / Pinning

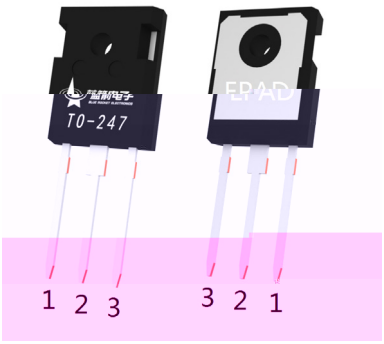

ŧ. ʜ ב / Marking

			±	
		θ		
		θ		
		θ		

					±	
		μ				

BRGB75N65AHA

BRGB75N65AHA

≠ ∃ ̃Ạ´E ∀ ƒ / Electrical Characteristic Curve


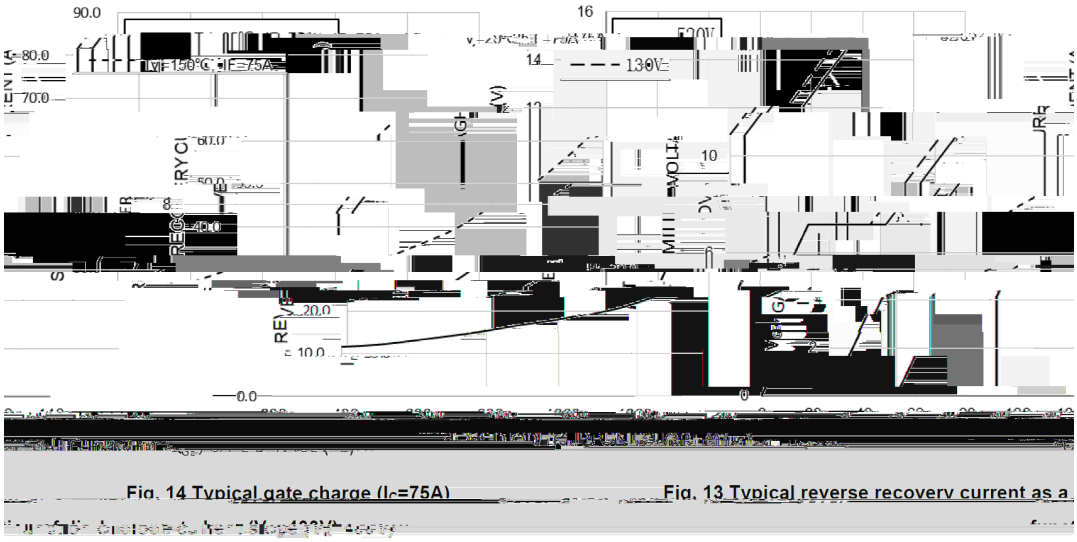


Fig. 14 Typical gate charge (I_C=75A)

Fig. 13 Typical reverse recovery current as a

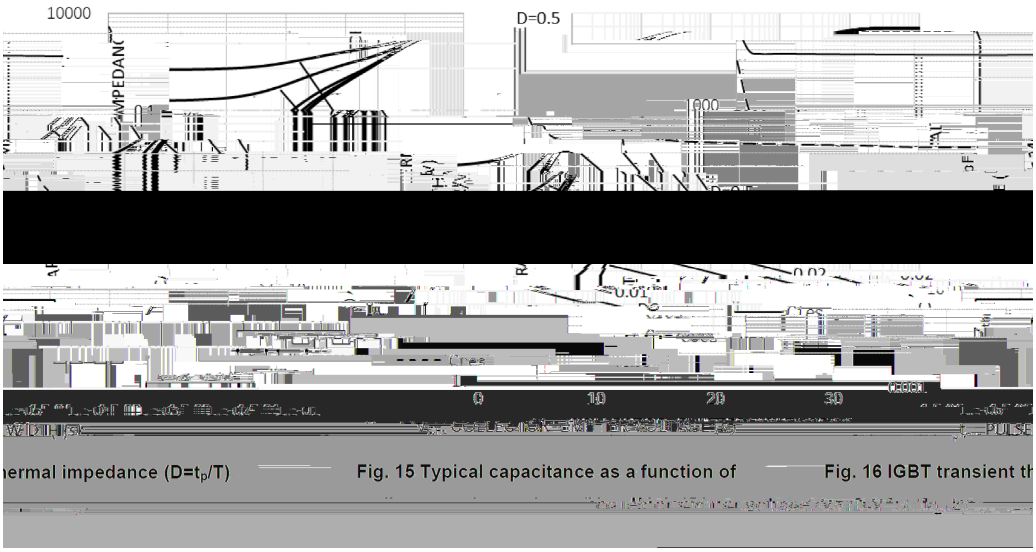


ermal impedance (D=t_p/T)

Fig. 15 Typical capacitance as a function of

Fig. 16 IGBT transient th

Ł. Ł'Ω / Marking Instructions

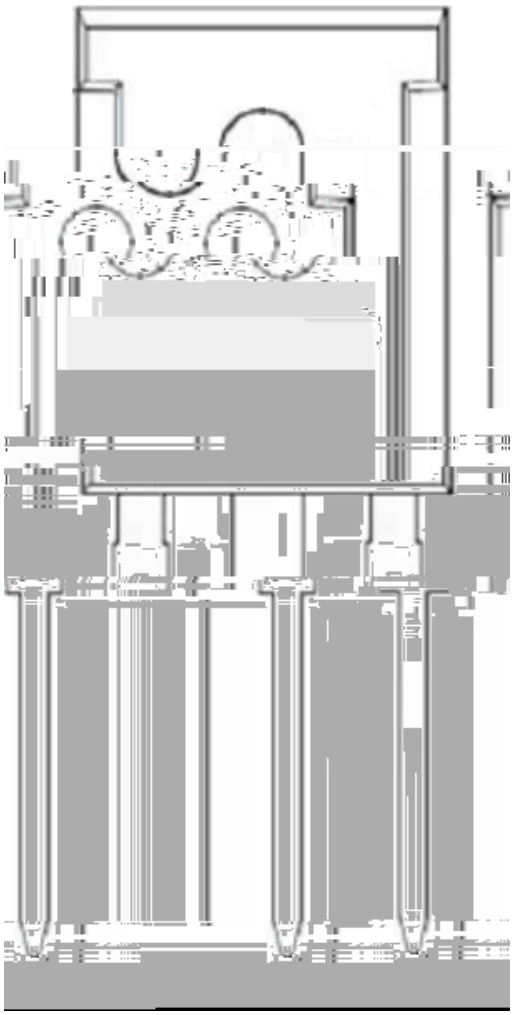

GB75N65AHA

****