WR057: ṂṂ Ł ʌ ɻ ₓ Ⅱ ὐ ɥ ᒣ

Ң Ⅱ ɔ U * □ ỷ ㇻ Ӯ Ң ت ⊐ я ∪ UrKV ғ β

ڜ ψ ʰ ψ ḭ ʰ ɔ̣ j ڑ Ă ɔ ◊



X X X

ǫ̈ ɾ z ł ˌ ʜ ⊇ y / h


v ̈Ω	ϒ N	̈Ω Θ	D Ч


BRGH25N120D


DATA SHEET

		Ω				

≠ ∃ ÃÁE ∀ ƒ / Electrical Characteristic Curve

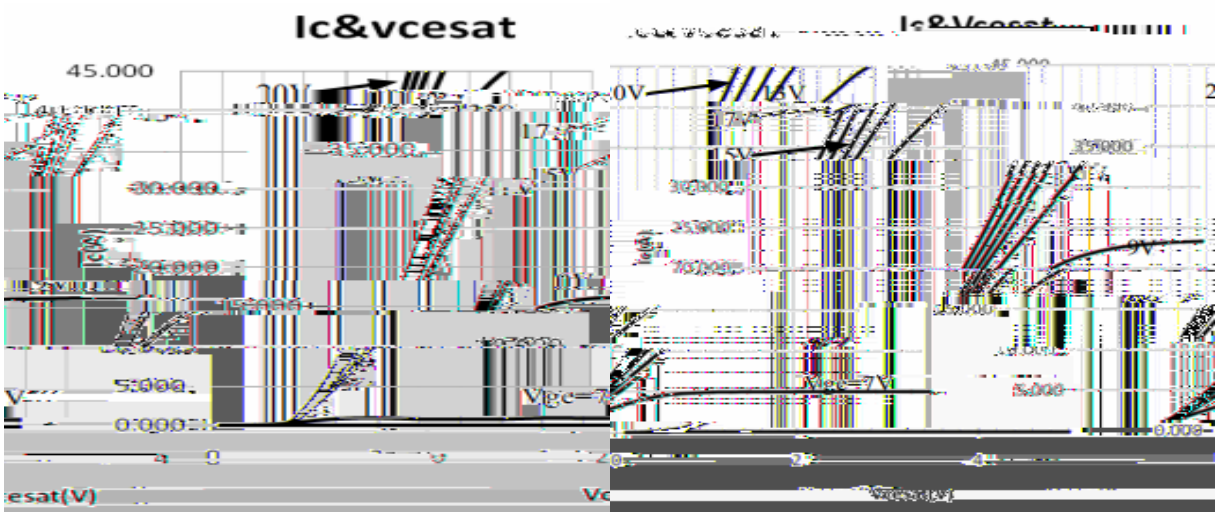


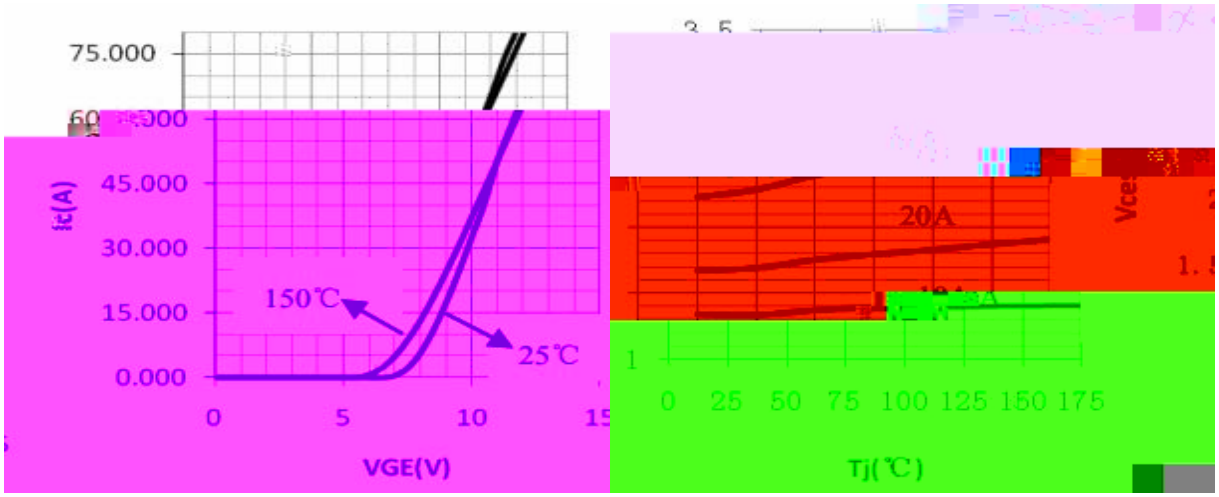


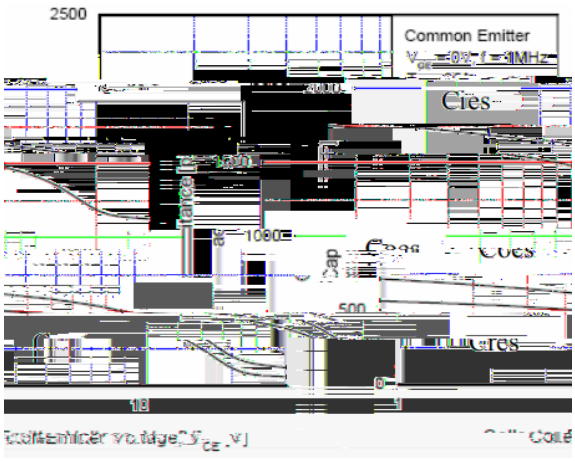





≠ Ǝ ÃˊE ᛘ ƒ / Electrical Characteristic Curve

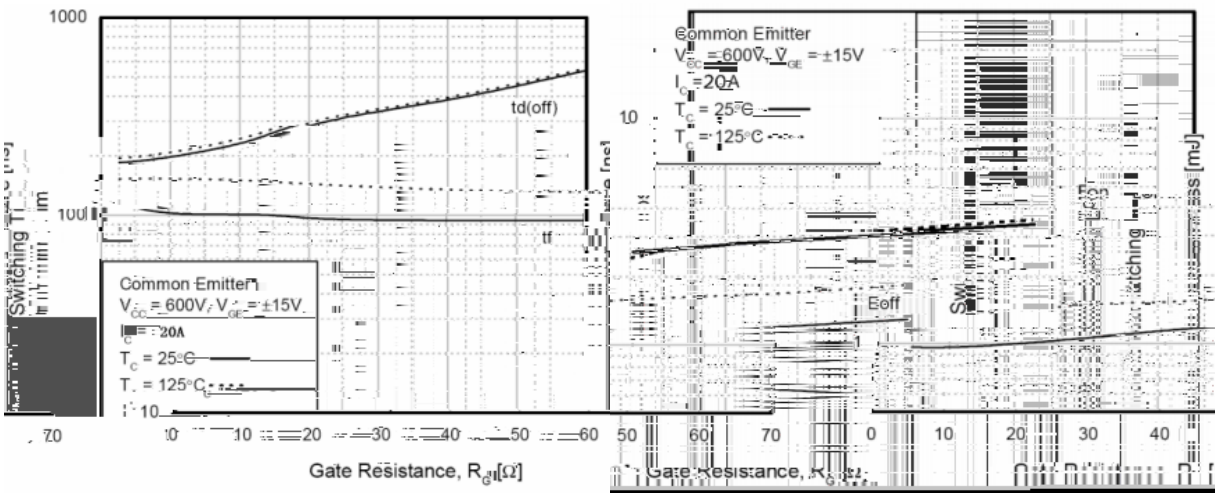


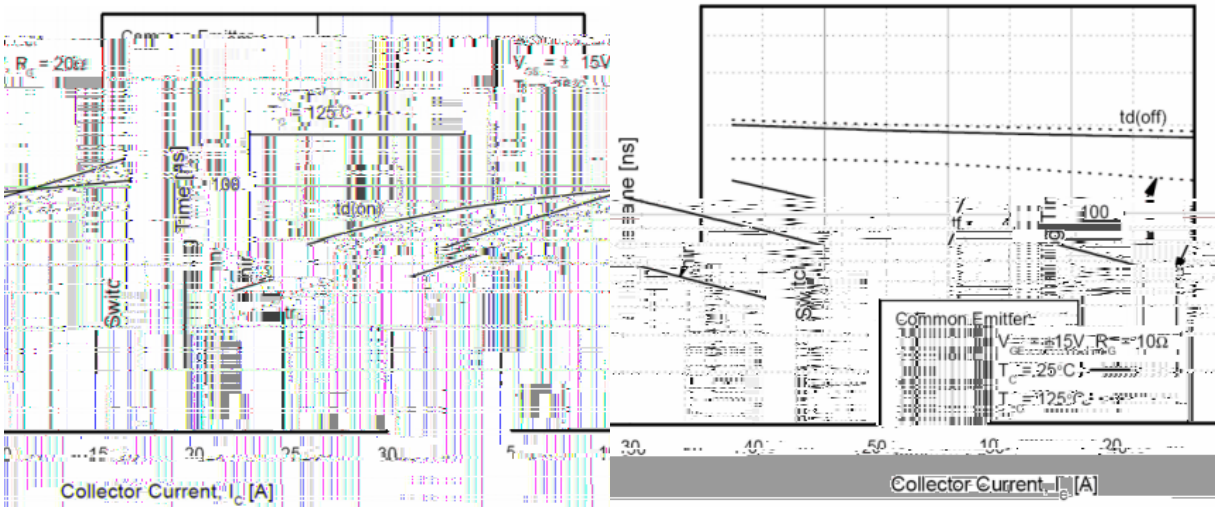


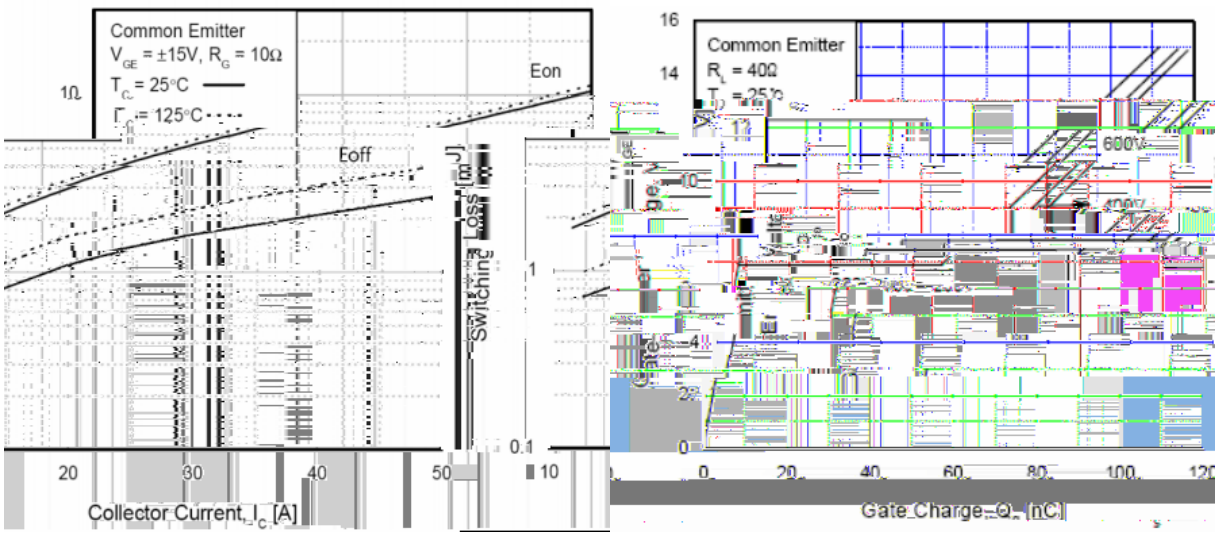


≠ ∃ ÃΔ´E ∀ ƒ / Electrical Characteristic Curve

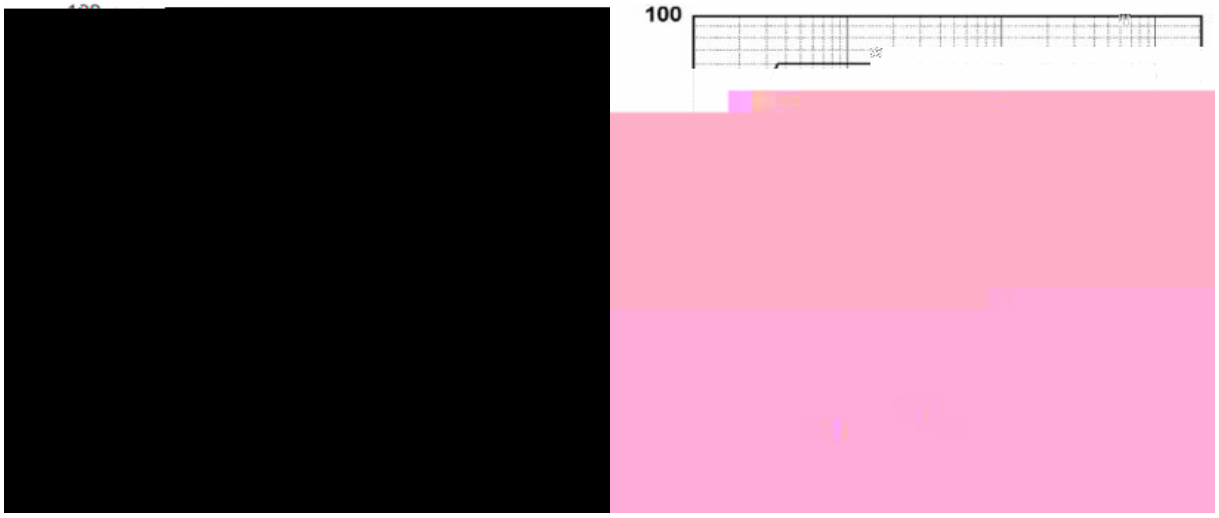


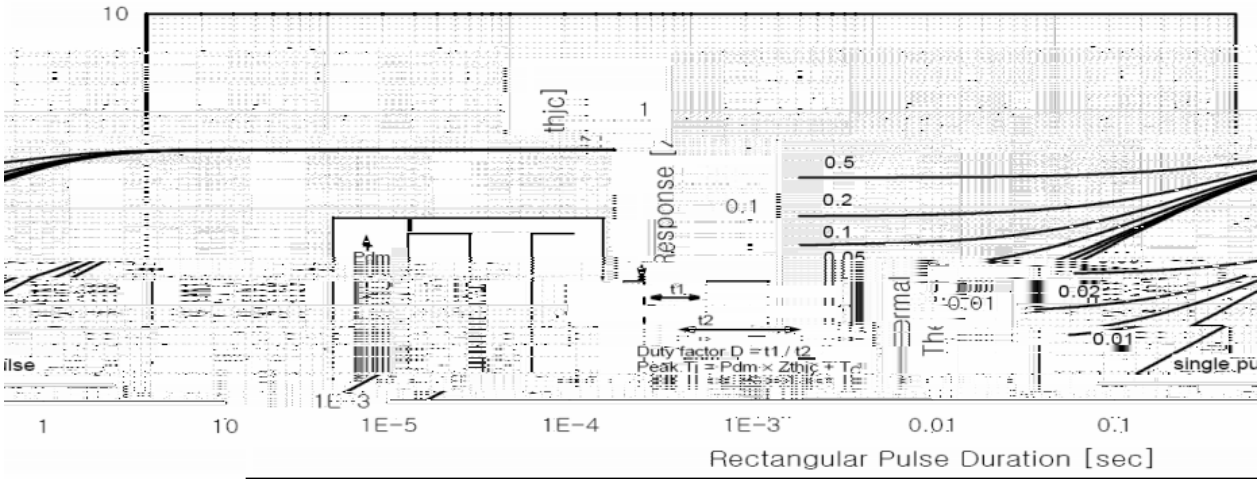

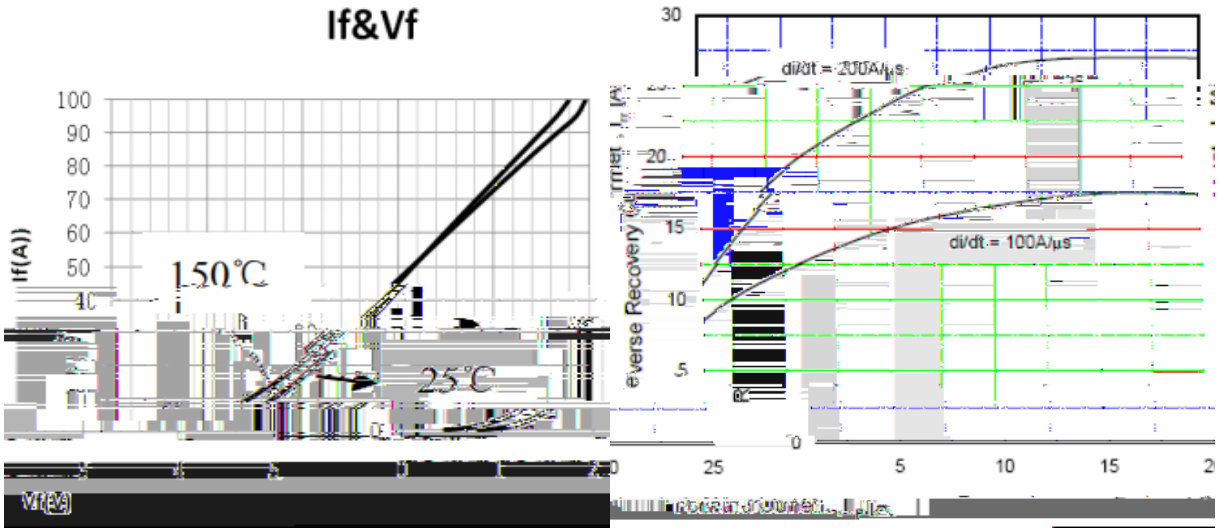


≠ Ǝ ÃˊE ∀ ƒ / Electrical Characteristic Curve

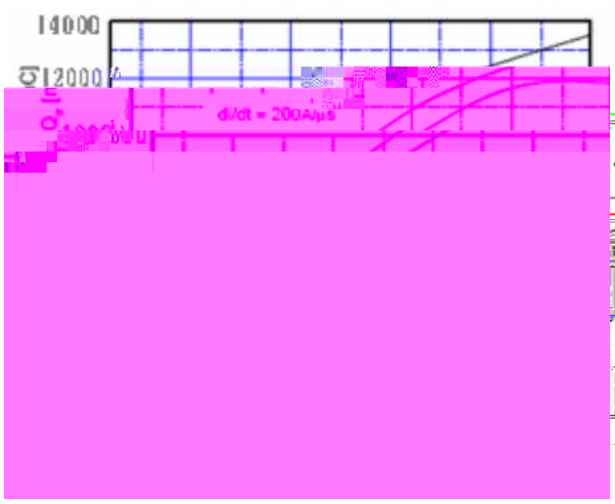


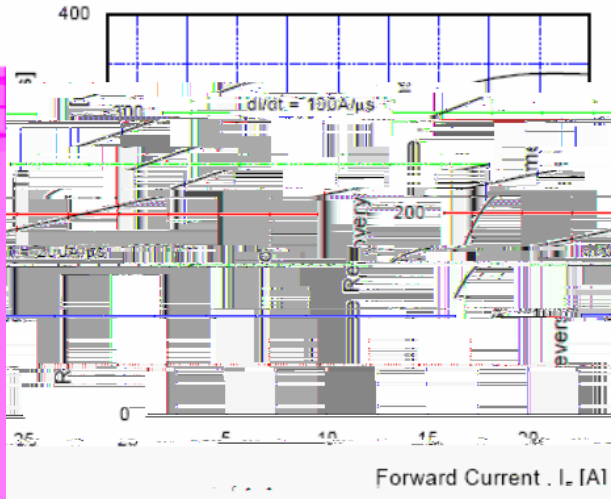

ᵘ Ė Ồ Ļ ʃ / Package Dimensions

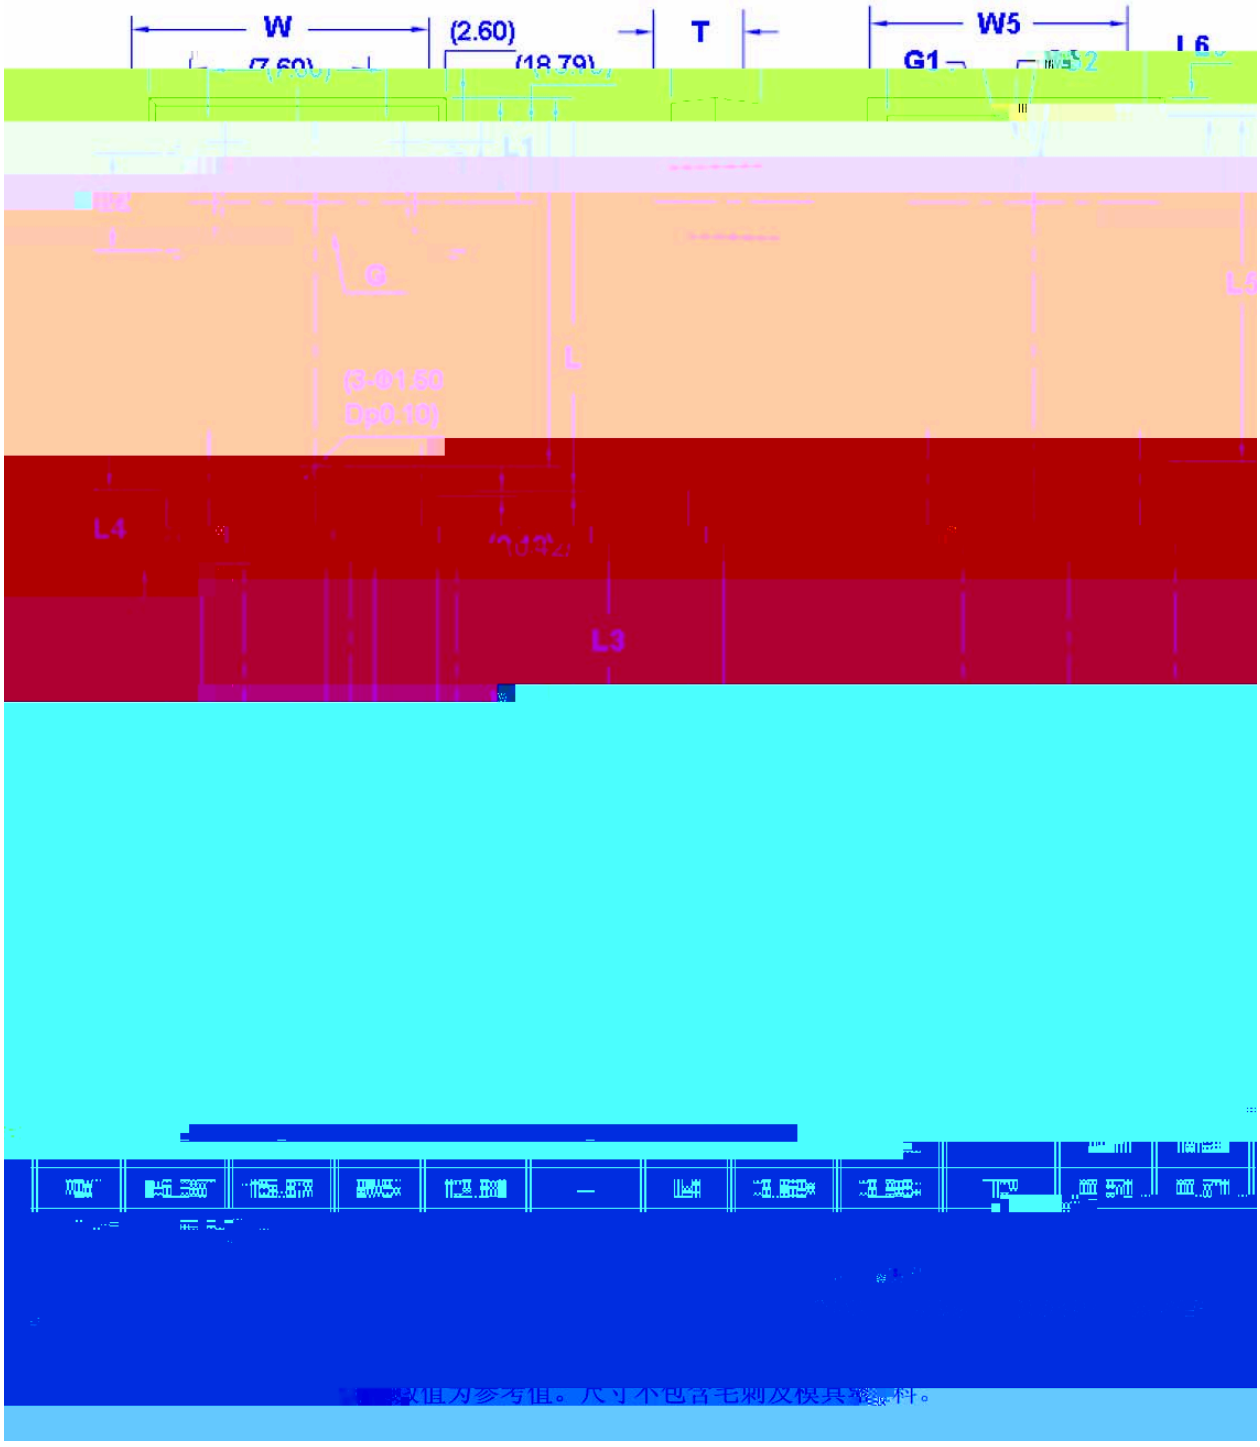

ł. Ļ Ω / Marking Instructions

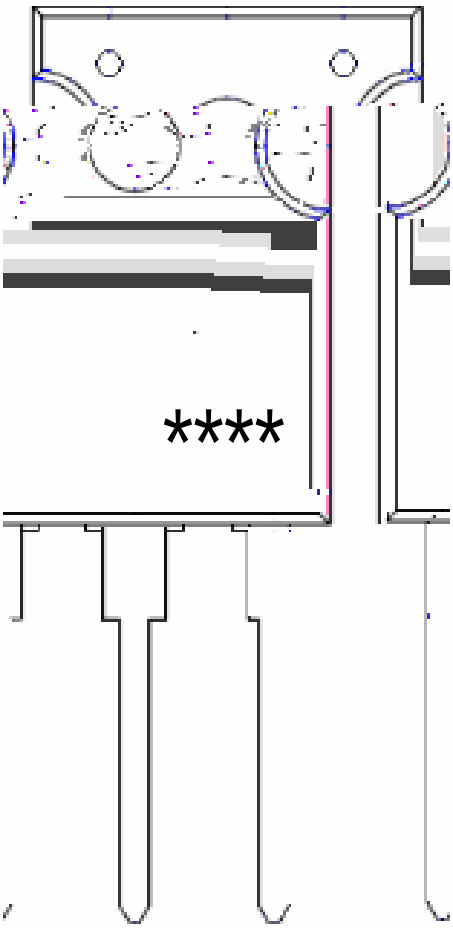


ب ˝ χ

EU=

J58Q453G χ

---- χ

↓ ș ╕ ẘ ́E ᛋ ƒ (ώ ᴈ) / Temperature Profile for Dip Soldering(Pb-Free)

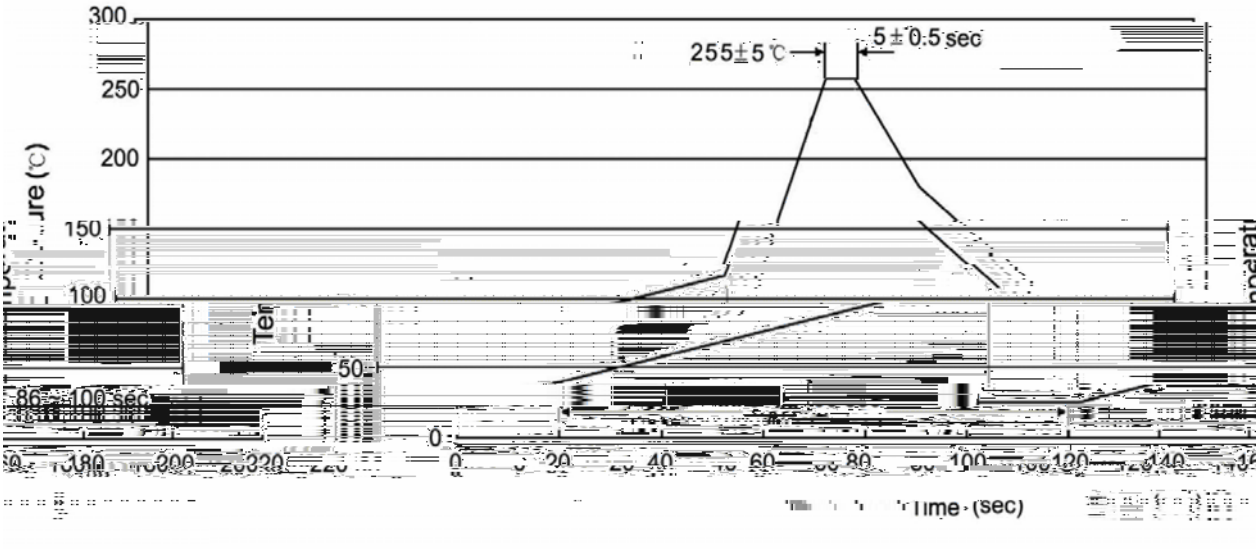

ᴗ ˝ χ

Ĺ ♬ □ ẙ Ќ ɬ ı ᾽H ᴊ Ќ ɬ

Š Ө □ ẙ ° ɬ ı ᾽H ᴊ ᾽Y ᾀ ᾐ ° ° ɬ °

ì ˙ ᛋ ˛ ɔ ѡ ẙ ᾐ Ќ ɬ ɬ

ᾀ ŭ ɋ ̄ ᾽Y Ţ / Resistance to Soldering Heat Test Conditions

□ ẙ χ ° ɬ ᾽H ᴊ χ °

ɒ Ŀ ᾀ — / Packaging SPEC.

˳ ᾶ ᵞ Ŀ

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box