/ Descriptions

40V 5.0A

/ Features


/ Applications

.


/ Equivalent Circuit



/ Pinning




PIN	DESCRIPTION
1	Cathode
2	Anode

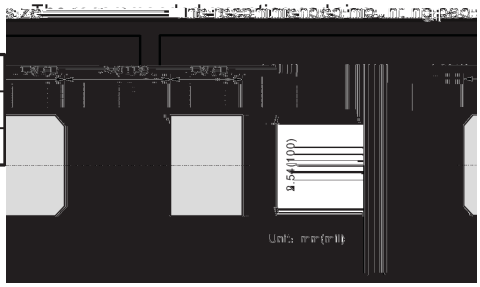



/ Marking




/ Electrical Characteristic Curve

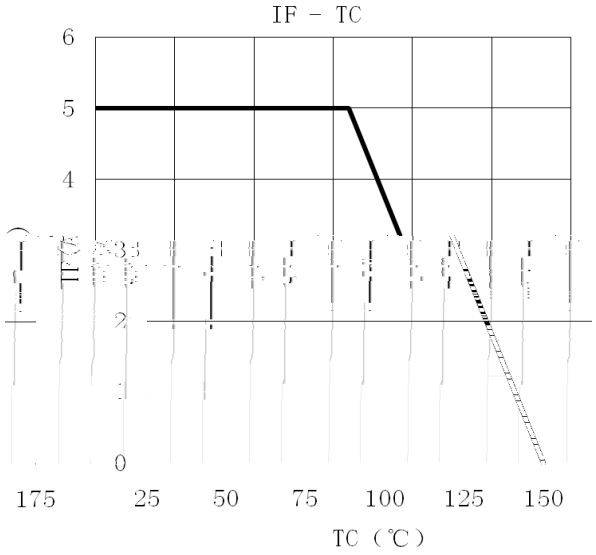


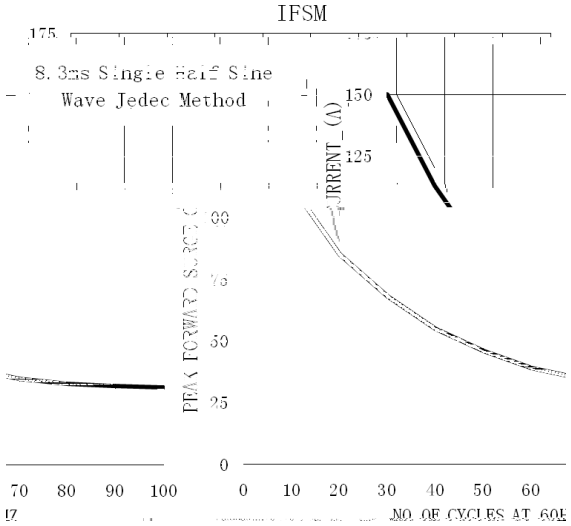

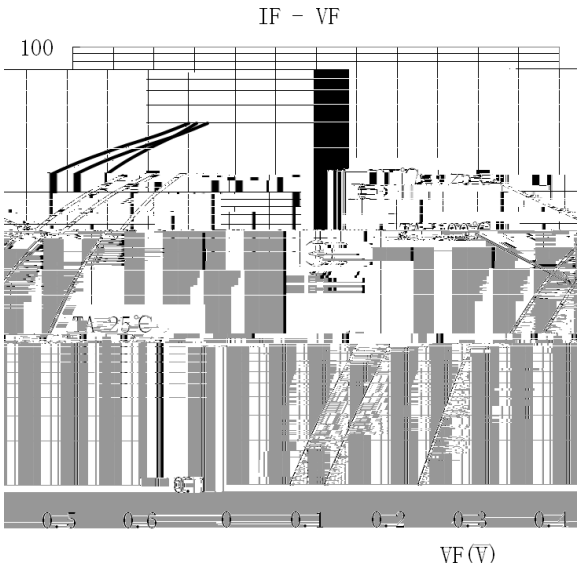

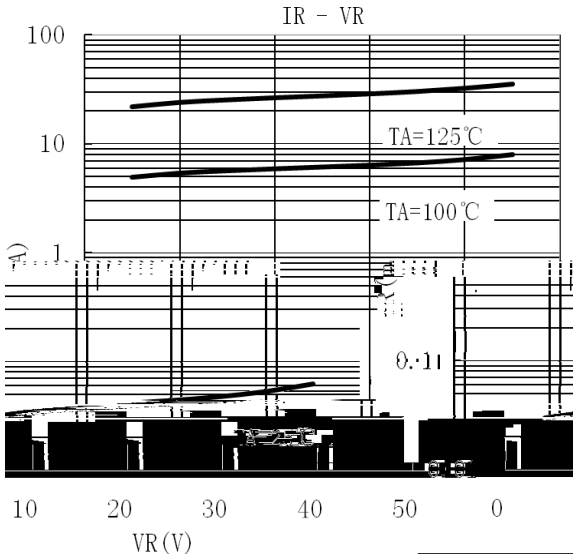


/ Package Dimensions

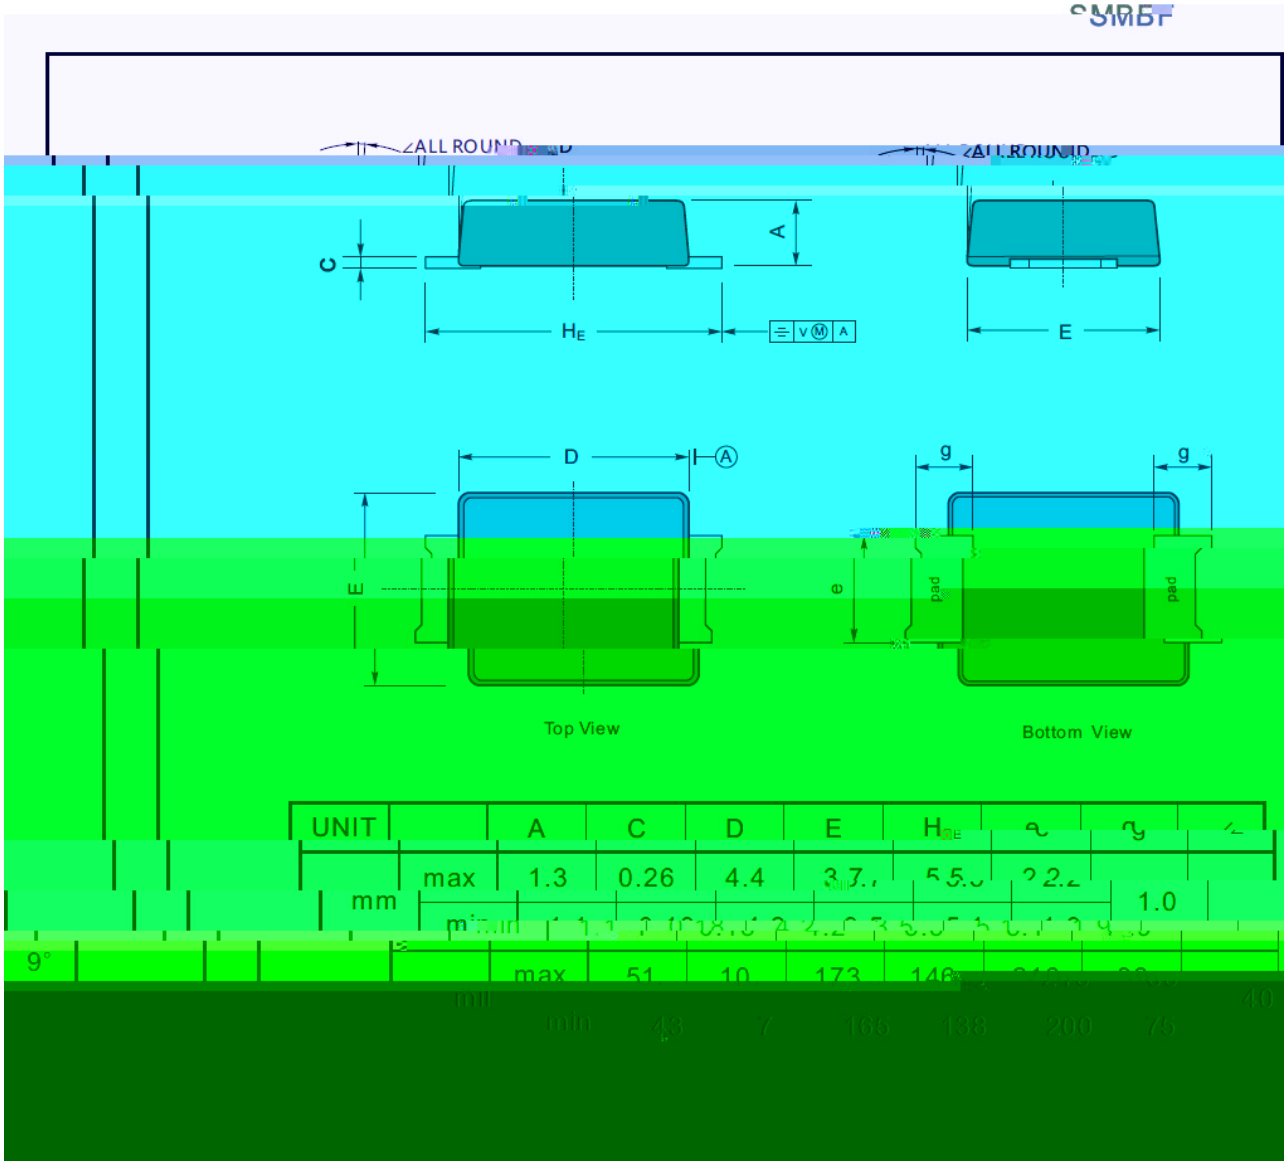


UNIT		A	C	D	E	H_E	e	g	
mm	max	1.3	0.26	4.4	3.7	5.5	2.2	1.0	9°
	min								
mil	max	51	10	173	146				
	min	43	7	165	138	200	75		0

/ Marking Instructions

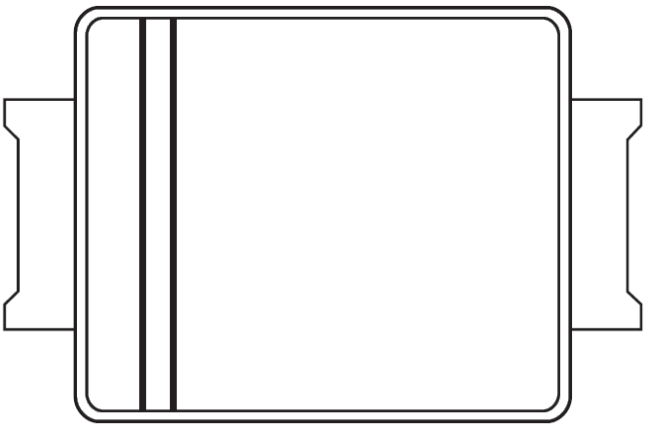

( ) / Wh p shrdwxrh Prriioh irr IU Uhiorw Vroghriqj+Pe-Frhh,

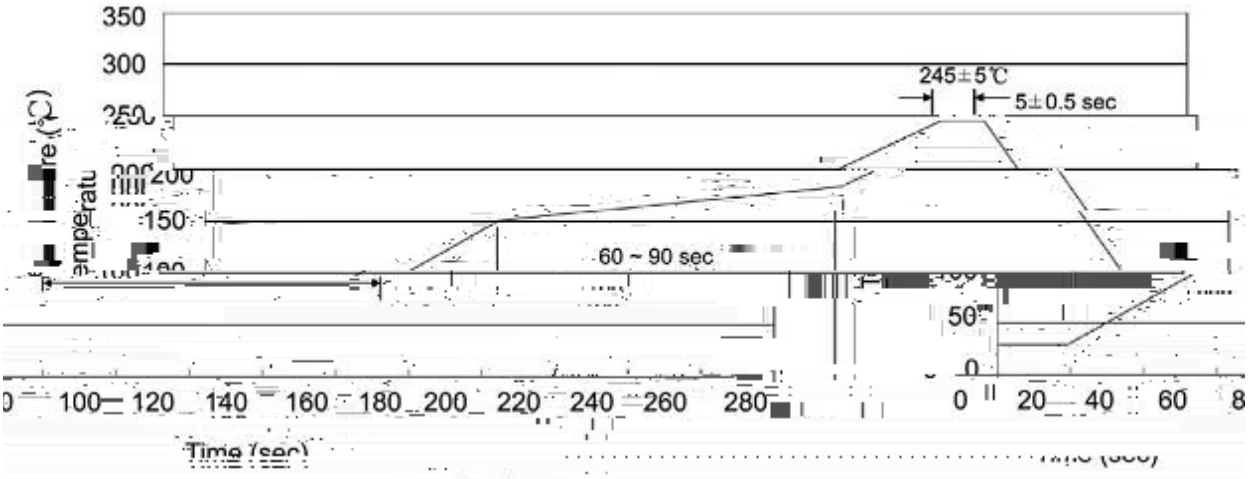

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱

/ Notices