: 5 .> / / x 4 6 4 ! - } â ’ož

Silicon 4 6 4transistor in a TO-252 Plastic Package.

(8 3 0 * * 6 ; m k —)í D }ož

@ *f* Parameter	… Z Symbol	*f* › Rating	% y Unit
Collector to Base Voltage	V_{CBO}	80	V
Collector to Emitter Voltage	V_{CEO}	80	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	8.0	A
Collector Peak Current	I_{CM}	16.0	A
Collector Power Dissipation	$P_D(T_A=25$ -)	1.75	W
Collector Power Dissipation	$P_D(T_C=25$ -)	20	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

@ *f* Parameter	… Z Symbol	y ¡ Ú ^ Test Conditions	Â 4 › Min	Á º › Typ	Â Ý › Max	% y Unit
Collector to Emitter Breakdown Voltage						
Collector Cut-Off Current	I_{CES}	V_{CE}= 80V V_{BE}= 0				

Ô ? d • Ž ¢ / E&C&C



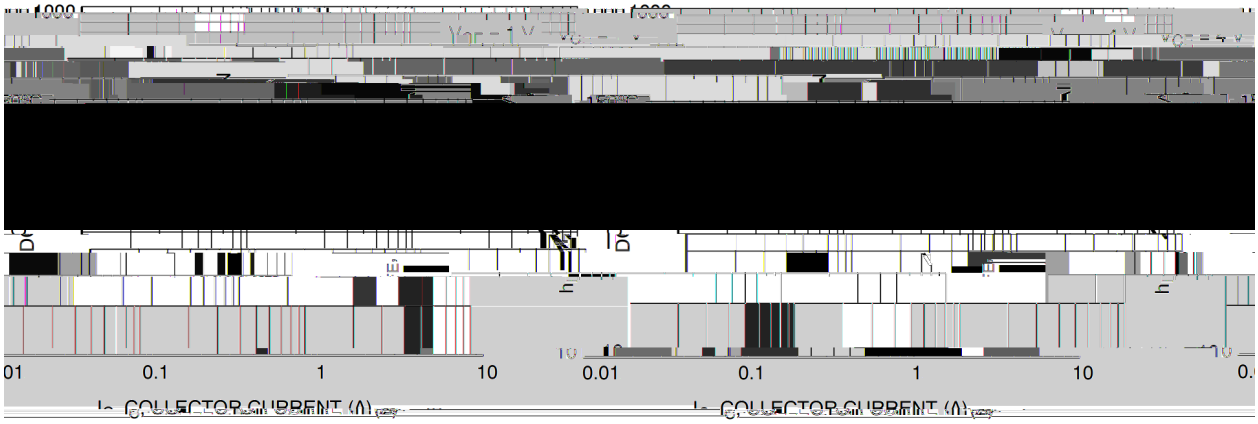



Figure 1. DC Current Gain

Figure 2. DC Current Gain

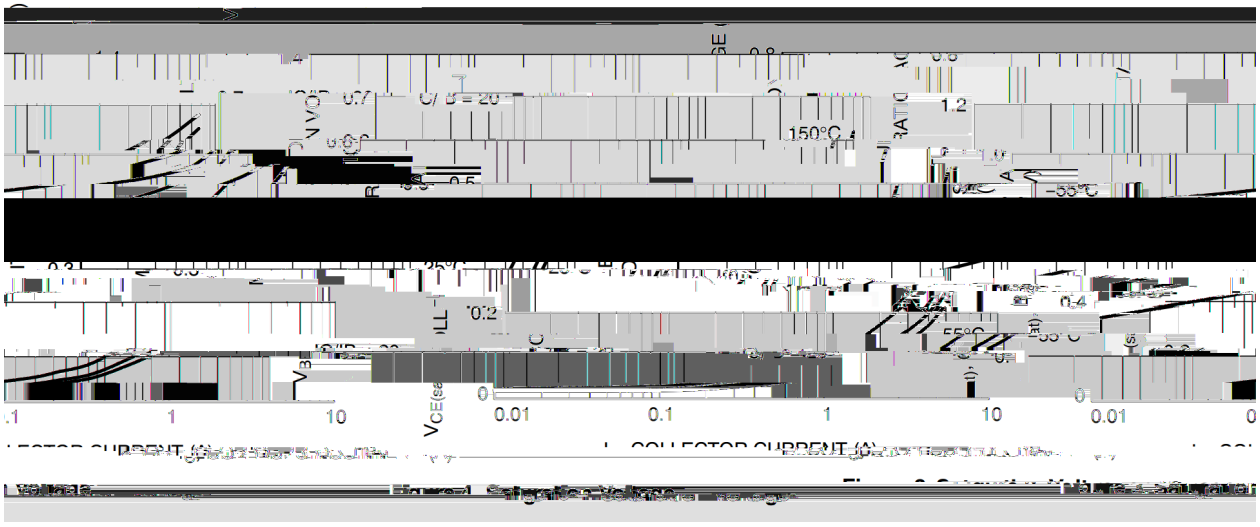

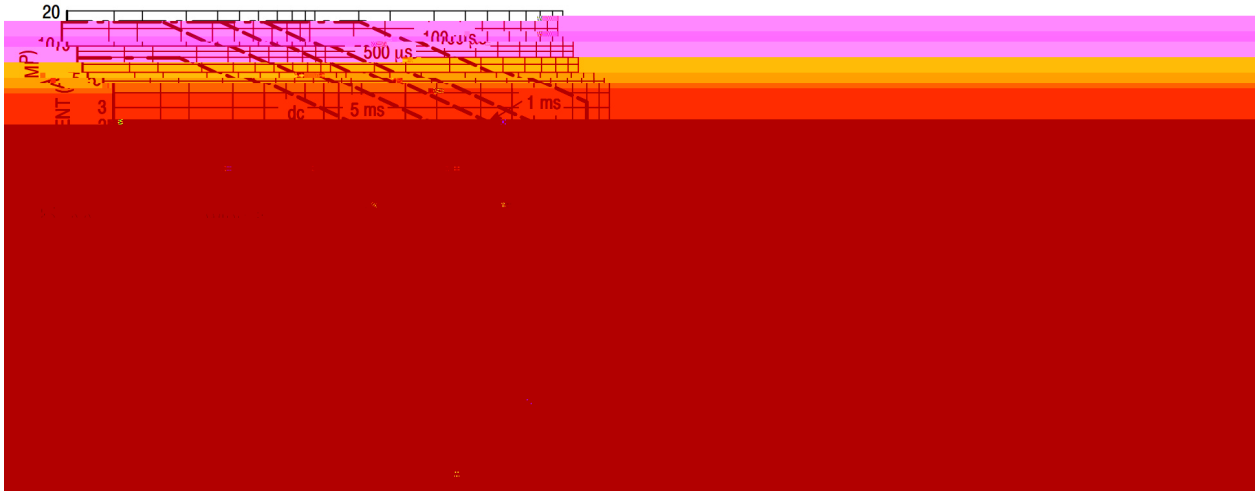


Ø ¤ =) ¢ / Pkg Dim

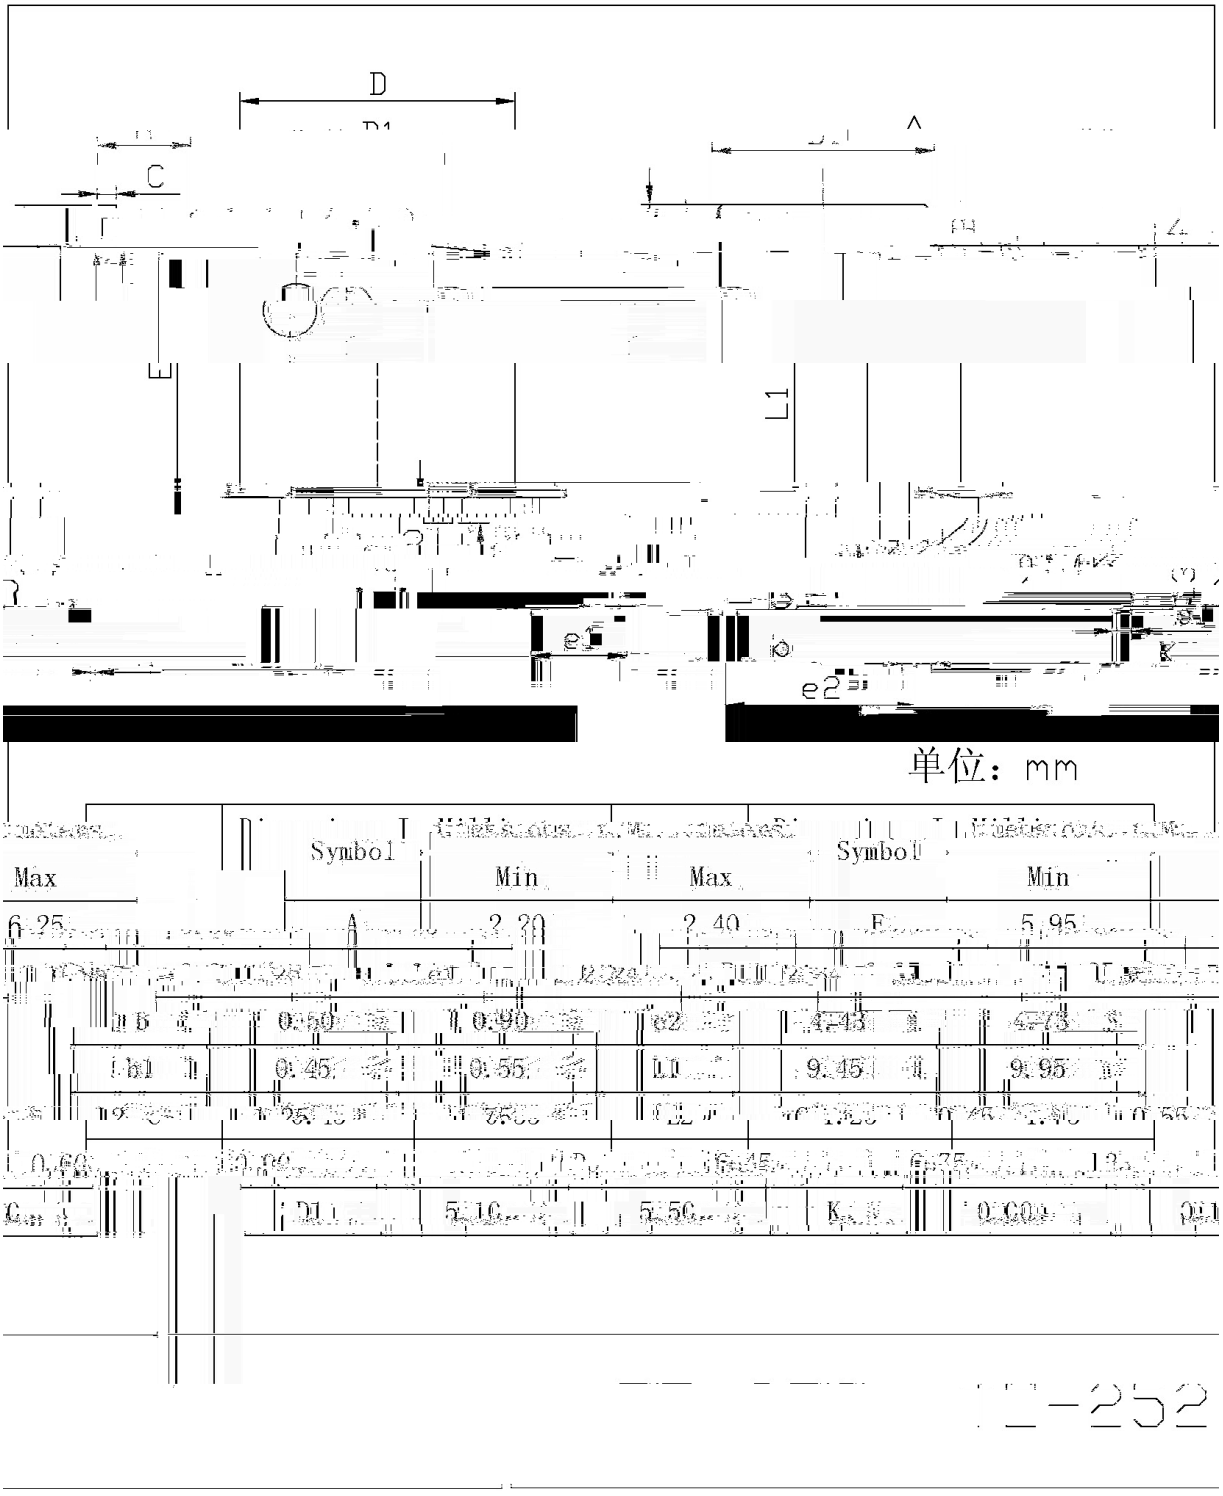

Symbol	Min	Max	Symbol	Min	Max
A	2.20	2.40	E	5.95	6.25
b	0.50	0.90	e2	4.43	4.73
b1	0.45	0.55	L1	9.45	9.95
D1	5.10	5.50	K	0.000	0.600

TO-252

, M y ƒ **/ Mgb**

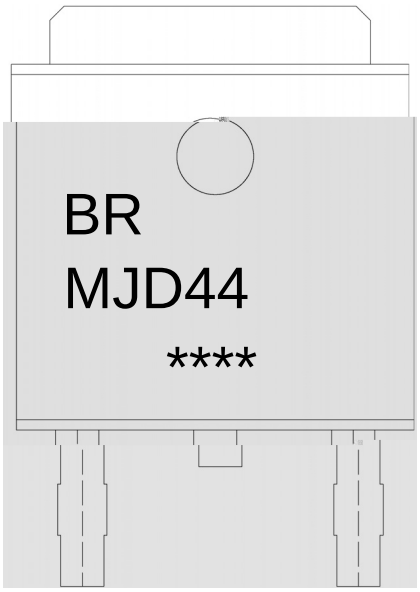

ª ¢ y

BR y ¸ [W A

3 0 * y º Z W A

y ÿ D Z W A k š ÿ D Z J

Note:

BR:	Company Code
MJD44:	Product Type Code
****:	Lot No. Code, code change with Lot No