/ Descriptions

PDFN5Ö6 ṂṂ Ł VIF ₌ ᵍ‾ ‖ ㄱ

SiC Schottky Barrier Diode in a PDFN5×6 Plastic Package.

/ Features


ˆΩ ǎ Ḥ ı ѽ ' ᵪ ı ṋ ꜰ β


Low power loss, high efficiency, HF Product.

[redacted]

₿̂ᵪ ᵪ ḷ ᵪ ᴙ ᶻ ↄ ㅣ̃Ω ㅣ‾ ‖ ㄱ ı ㅅ ㅣ‾ ‖ ㄱ

For high frequency, high voltage, high current rectifier diode, freewheeling diode

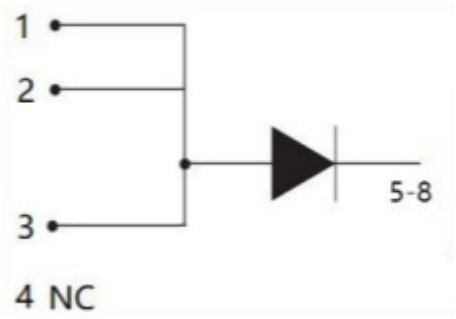

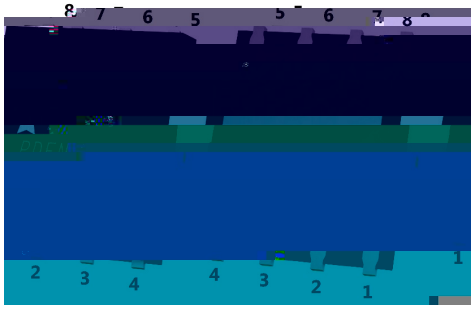

PIN 1,2,3 χ Anode PIN5-8 χ Cathode PIN 4 χ NC

/ Marking


ð м ヿ ب ˝


See Marking Instructions.

v ̈Ω Parameter	ϒ N Symbol	̈Ω Ö Rating	D Ч Unit
Peak Repetitive Reverse Voltage	V_{RRM}	650	V
Maximum RMS Voltage	V_{RMS}	455	V
Maximum DC blocking Voltage	V_{DC}	650	V
Continuous Forward Current,T_C=150	I_F	6	A
Peak forward surge current,tp=8.3ms	I_{FSM}	52	A
Total power disspation	P_D	53	W
Typical Thermal Resistance Junction to Case	R θ JC	2.8	/W
Operation Junction Temperature and Storage Temperature	T_J, T_{STG}	-55~+175	

v ̈Ω Parameter	ϒ N Symbol	╝ ː ˥ Ţ Test Conditions	ώ ṇ Ö Min	Ɛ ʒ Ö Typ	ώ ᶻ Ö Max	D Ч Unit
Reverse Voltage	V_R		650	-	-	V
Forward Voltage	V_F	I_F=6A T_C=25	-	1.27	1.5	
		I_F=6A T_C=175	-	1.38	1.6	
Instantaneous Reverse Current	I_R Note 1	V_R=650V T_a=25	-	4	50	μA
		V_R=650V T_a=175	-	200	200	
Total capacitive charge	Q_C	VR =650V,IF =6A di/dt = 200A/μs	-	17	-	nC


/ Electrical Characteristic Curve

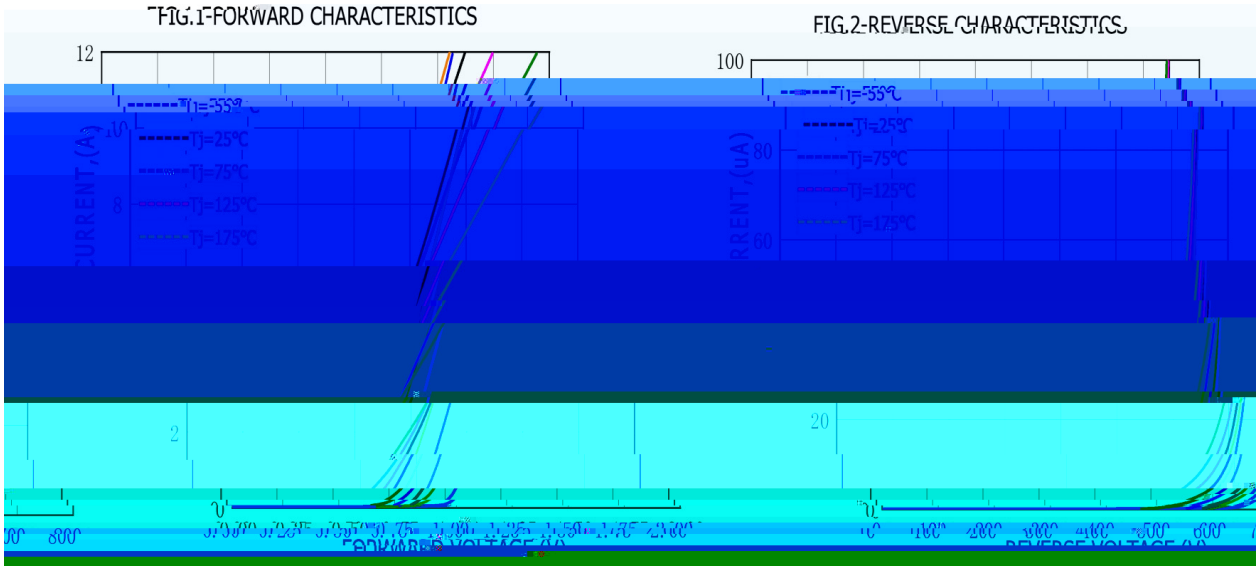

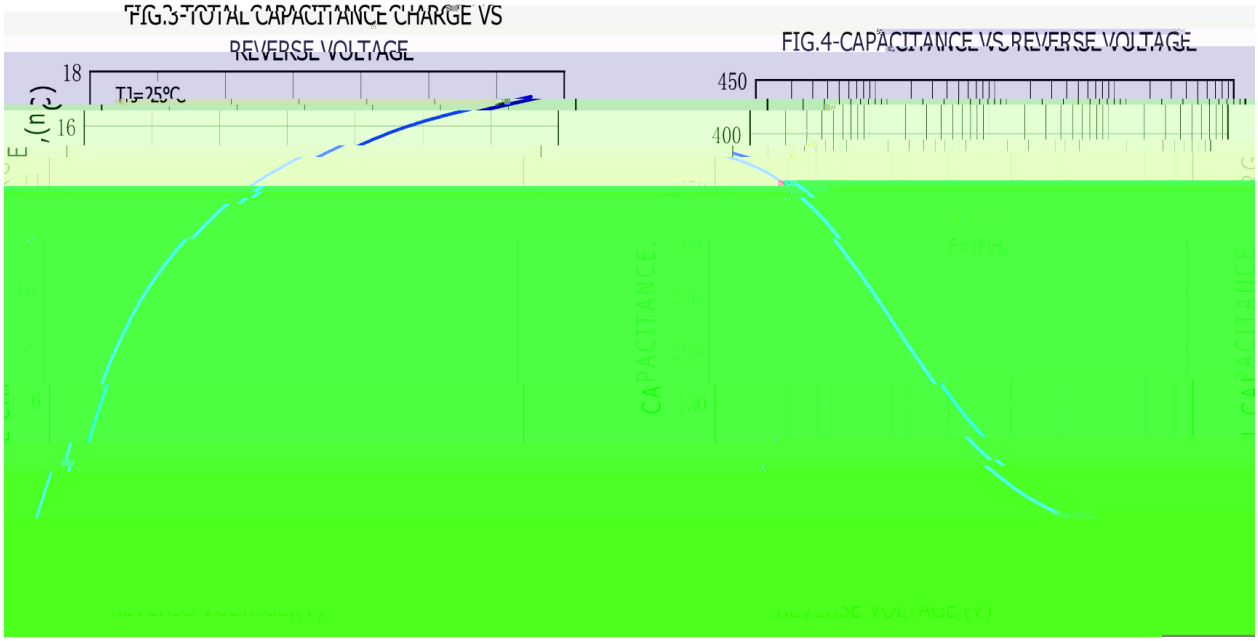

/ Package Dimensions

PDFN5×6 Unit:mm

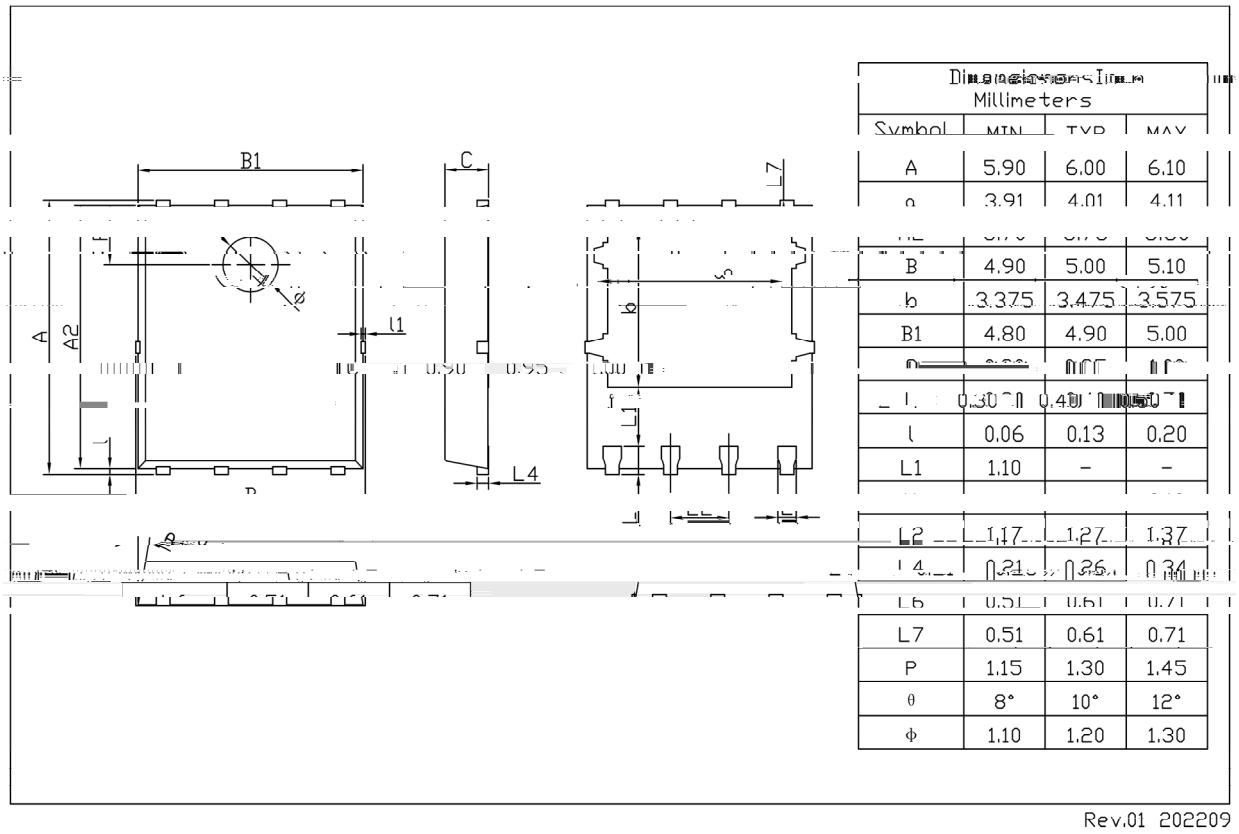

Dimensions In Millimeters			
Symbol	MIN	TYP	MAX
A	5.90	6.00	6.10
[illegible]	3.91	4.01	4.11
B	4.90	5.00	5.10
b	3.375	3.475	3.575
B1	4.80	4.90	5.00
[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	0.30	0.40	[illegible]
l	0.06	0.13	0.20
L1	1.10	–	–
[illegible]	[illegible]	[illegible]	[illegible]
L2	1.17	1.27	1.37
L4	0.21	0.26	0.34
L6	0.51	0.61	0.71
L7	0.51	0.61	0.71
P	1.15	1.30	1.45
θ	8°	10°	12°
Φ	1.10	1.20	1.30

Rev.01 202209

/ Marking Instructions




͡ ˝ χ	
EU χ	ѭ ϗ ͷ Ղ
SC06650 χ	ѭ ϛ ᴺ Ղ
---- χ	ѭ ɬ ғ ή ᴺ Ղ ı ϐ ɬ ғ ή ᴺ Ψ ק

Note χ

BR χ	Company Code
SC06650 χ	Product Type Code
****:	Lot No. Code, code change with Lot No

( ) /

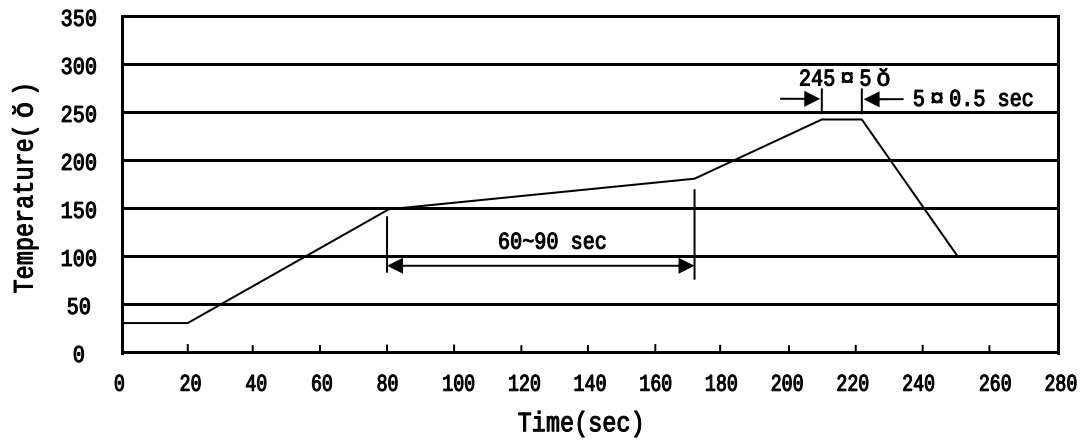

ِ ˜ χ

1 Ĺ♬□ ỷ 150Ḱ180ɬ ı `H ڑ 60Ḱ90sec;

2 Š Ө□ ỷ 245°5ɬ ı `H ڑ 'Y ﾊ ㎞ 5°0.5sec;

3 ì ˙ ﾘ ˛ ɔ ﾙ ỷ ㎞ 2Ḱ10ɬ /sec.

Note:

1.Preheating:150~180ɬ, Time:60~90sec.

2.Peak Temp.:245°5ɬ, Duration:5°0.5sec.

3. Cooling Speed: 2~10ɬ /sec.

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ 260°5ɬ `H ڑ χ 10°1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

ɔ` ﾔ Ł / REEL

Package Type Ṃ Ł ė Ǻ	Units					Dimension		(unit mm³)
	Units/Reel ᴱ2ɔ`	Reels/Inner Box ɔ` 2¨	Units/Inner Box ᴱ2¨	Inner Boxes/Outer Box ¨2ﾘ	Units/Outer Box ᴱ2ﾘ	Reel	Inner Box ¨	Outer Box ﾘ
PDFN5×6	5,000	2	10,000	6	60,000	13"×12	360×360×50	380×335×366

/ Notices