SiC


		μ				
						μ
						Ω
						μ


/41Ã5Ý ÞÀ•pSðvAò Ì Cá DX E• ìÀ "œªÎ • B$…U1ò„•€U\QÐ

BRSC65R180ZDP

DATA SHEET

/ Electrical Characteristic Curve

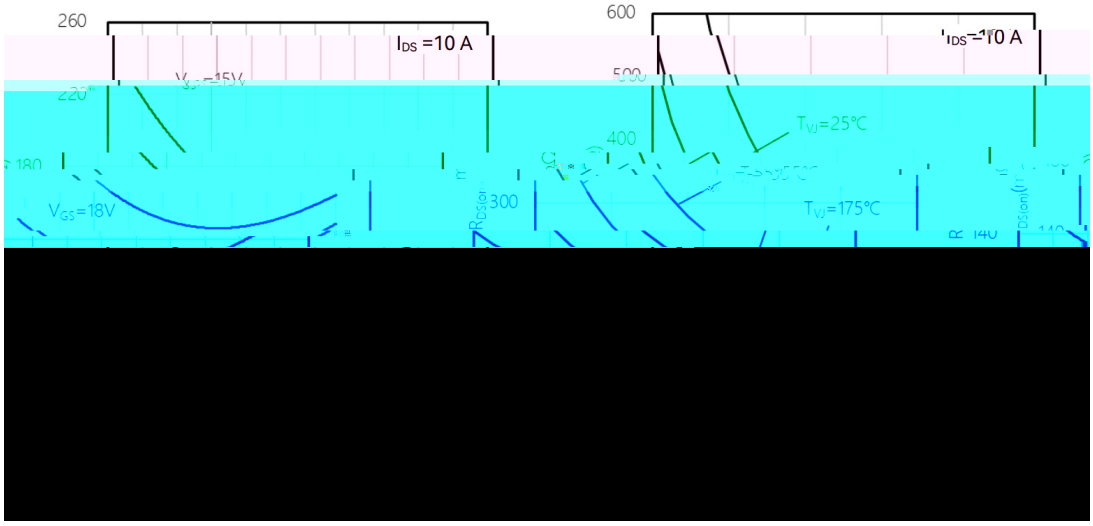


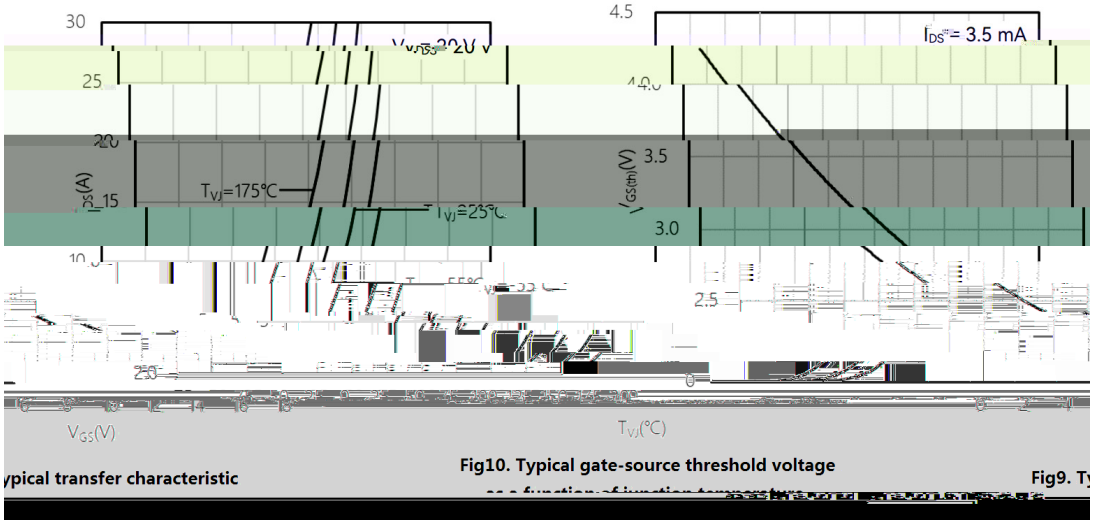

ypical transfer characteristic


Fig10. Typical gate-source threshold voltage


Fig9. T

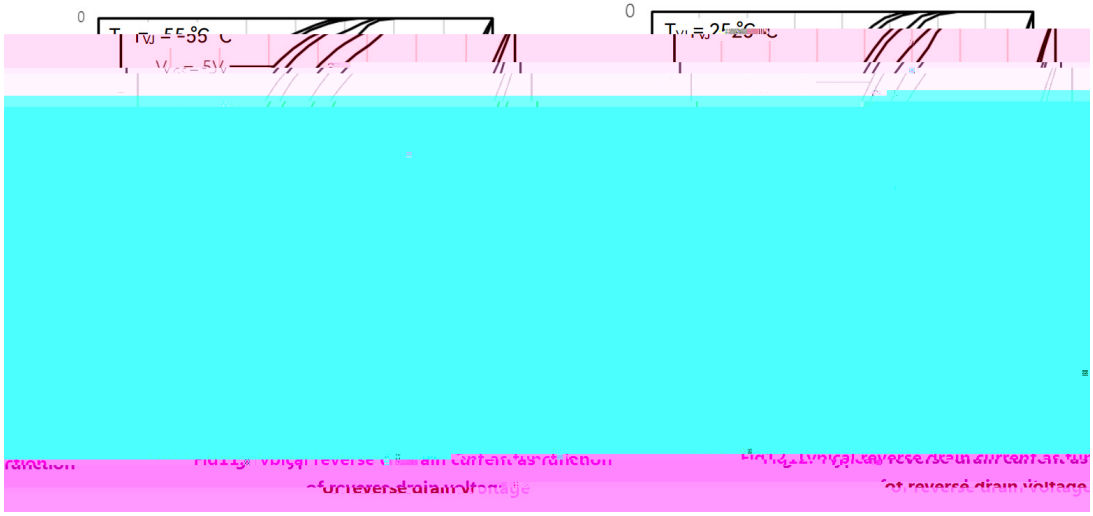


BRSC65R180ZDP


/ Electrical Characteristic Curve

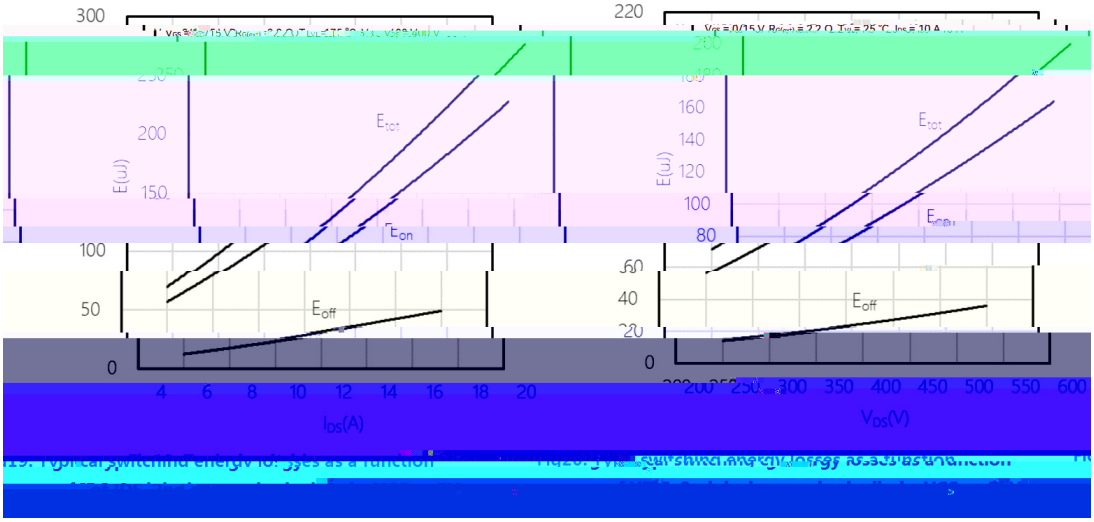

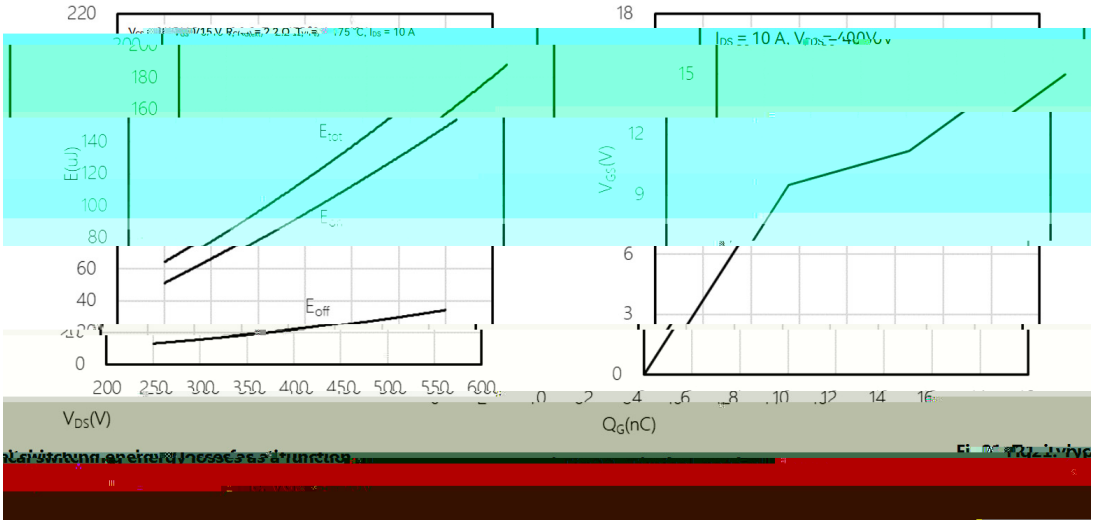


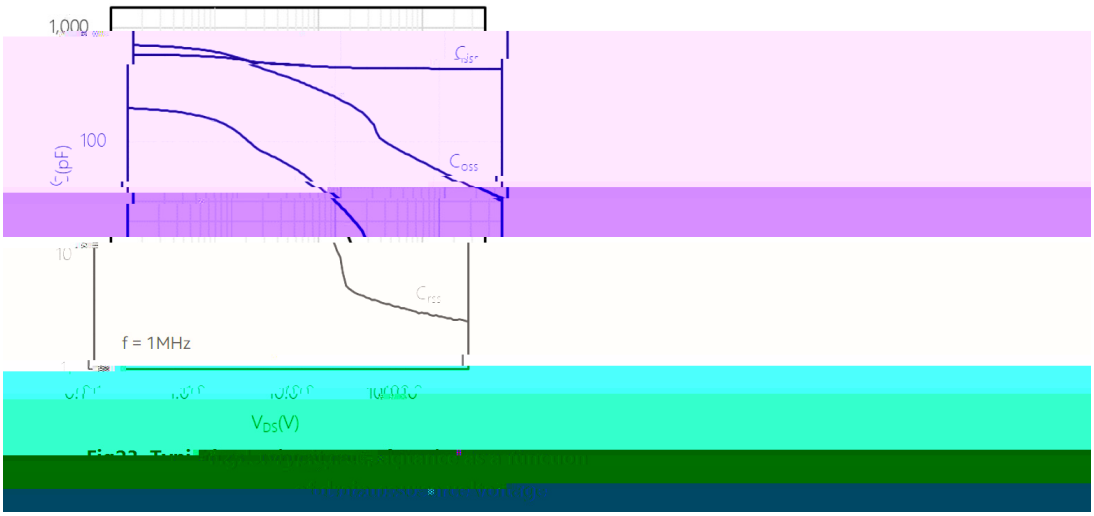

/ Electrical Characteristic Curve

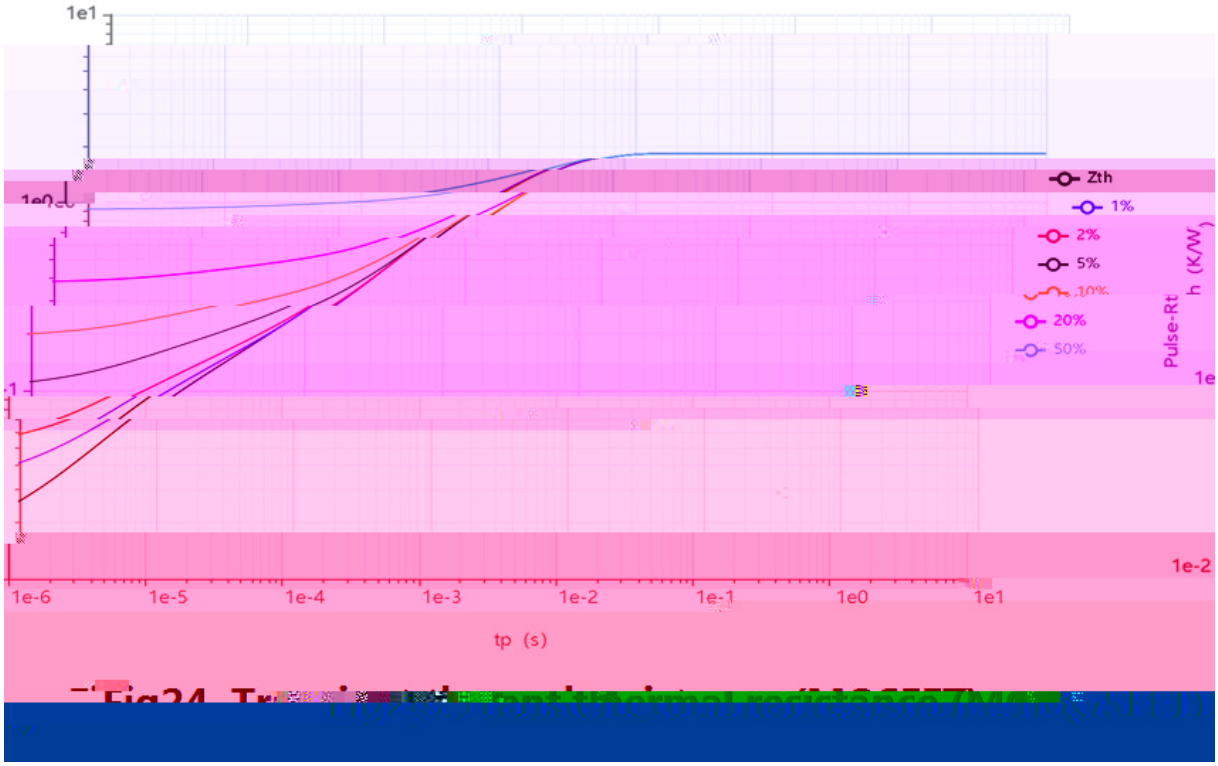

/ Marking Instructions

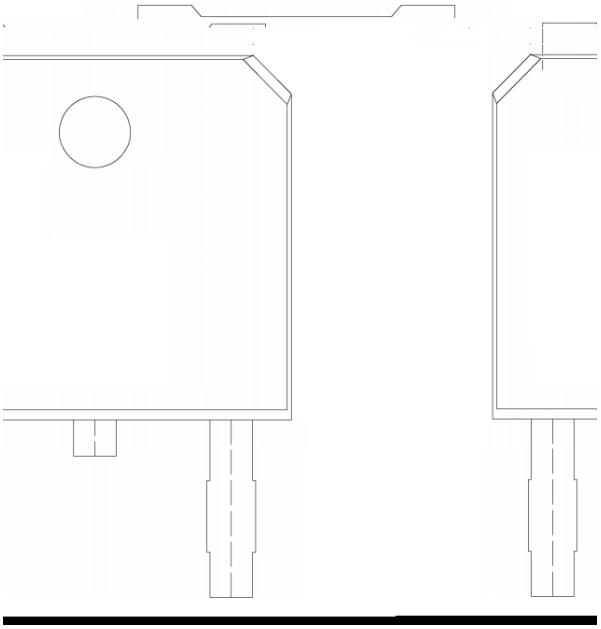


65R180Z

SC

****

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

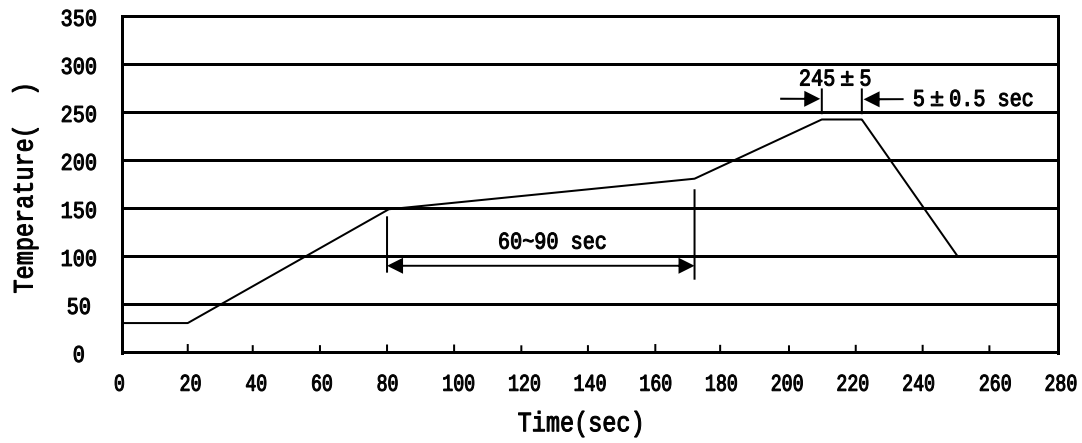

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices

≈