/ Descriptions

3.0A

Â


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning

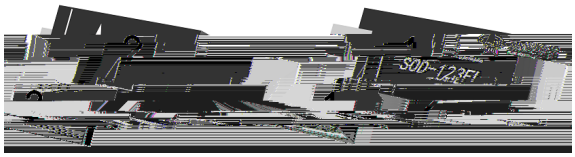

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

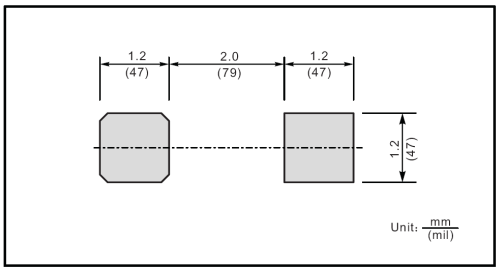


/ Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

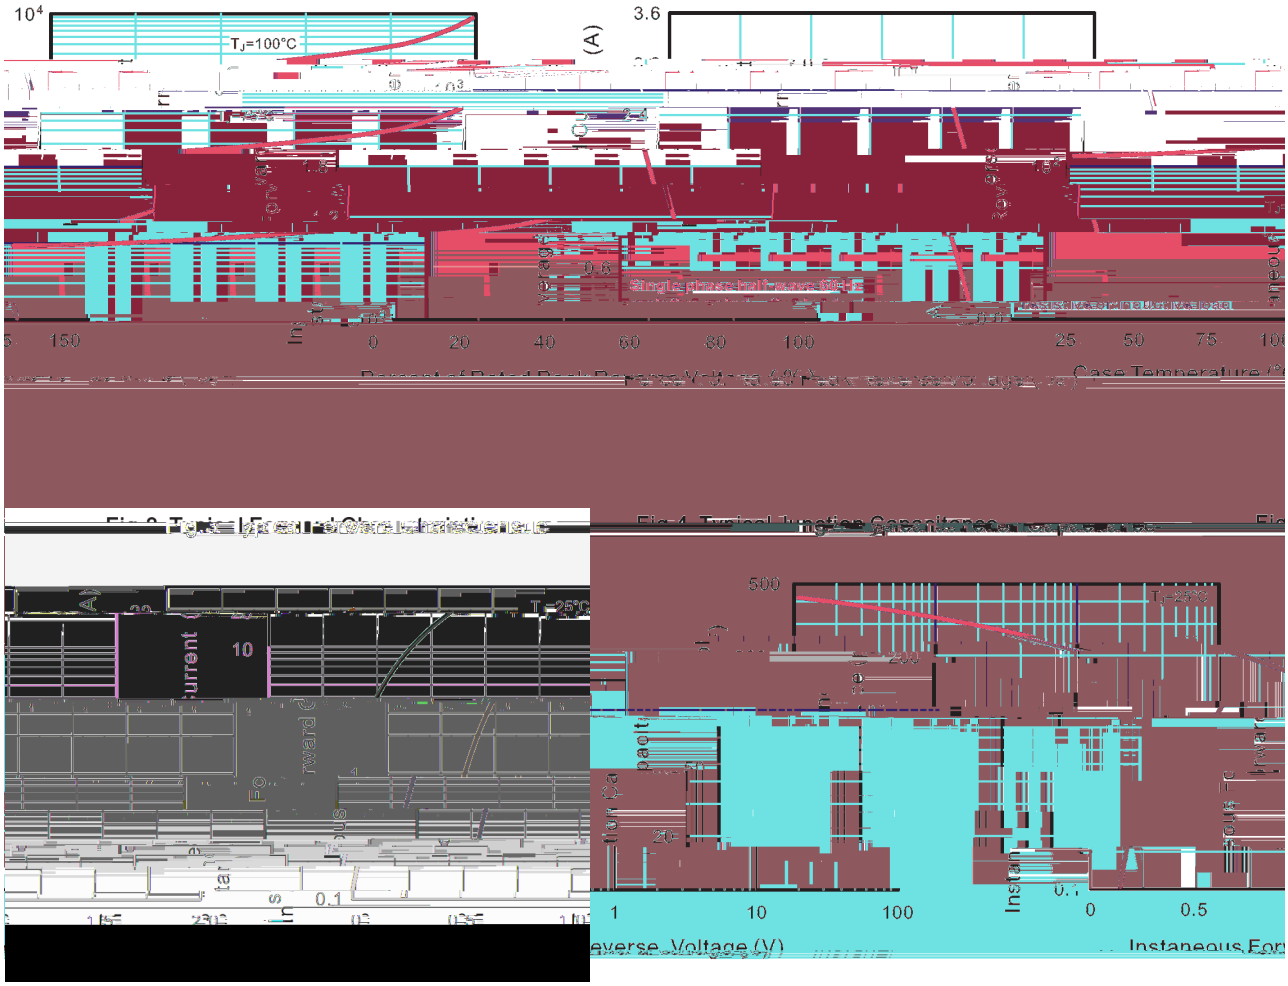


/ Package Dimensions

SOD-123FL

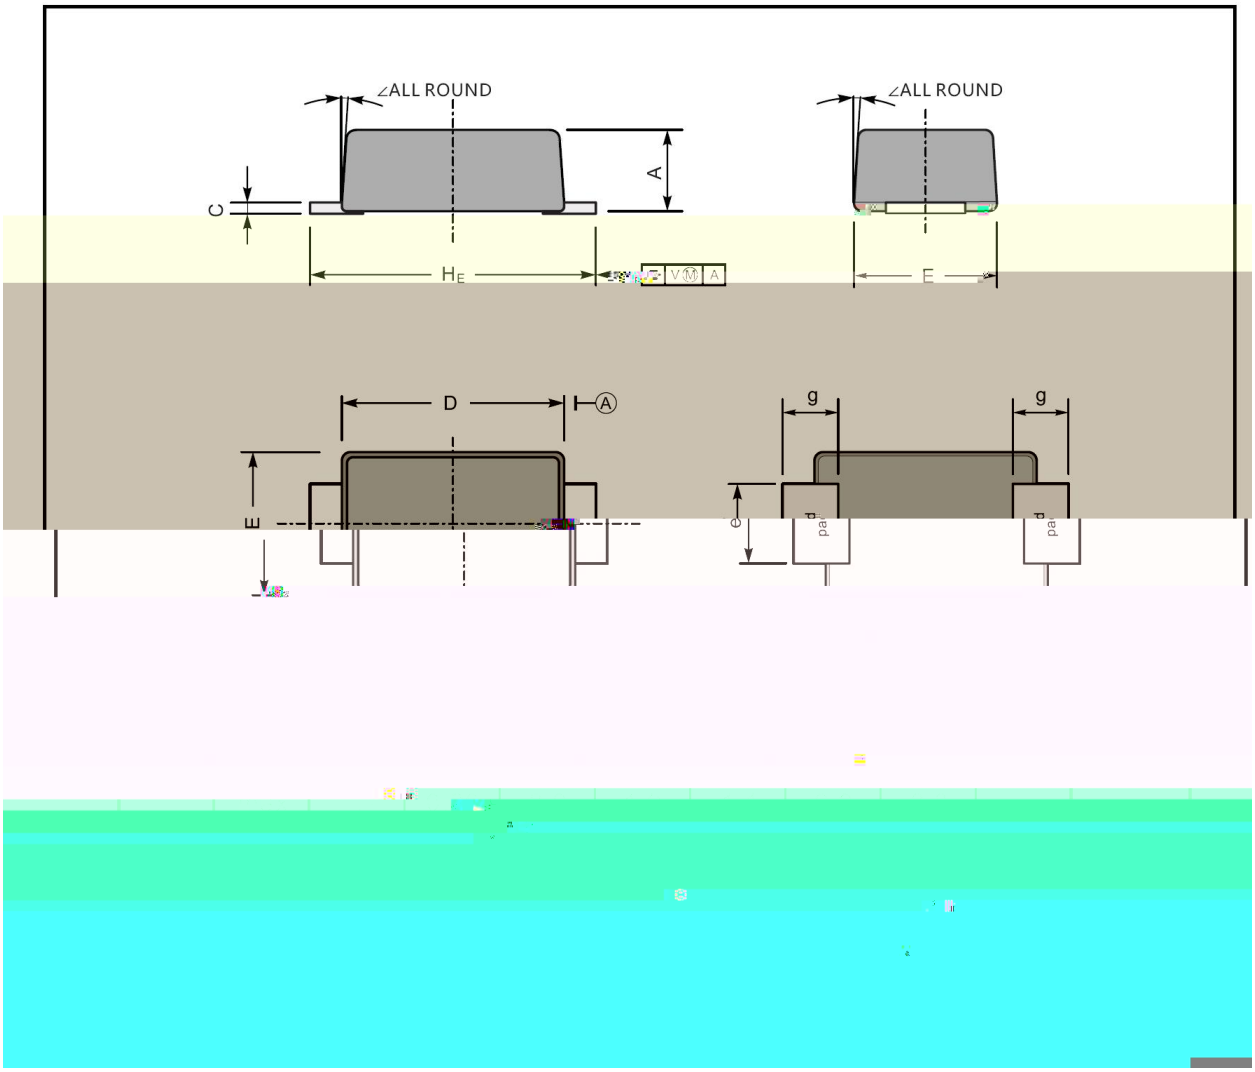

/ Marking Instructions

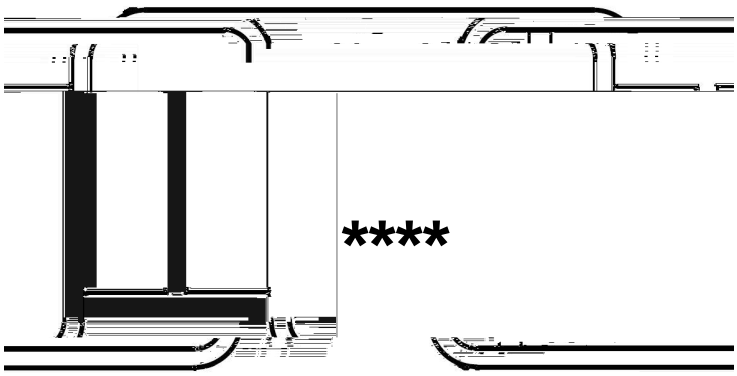

34L

****

34L

****

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±