

00 2 0A SMA


Surface Mount Superfast Recovery Rectifier, Reverse Voltage:800V,Forward Current:2.0

| Parameter | Symbol | Rating | Unit |
|---|---|---|---|

**0 8 9 = > ?**

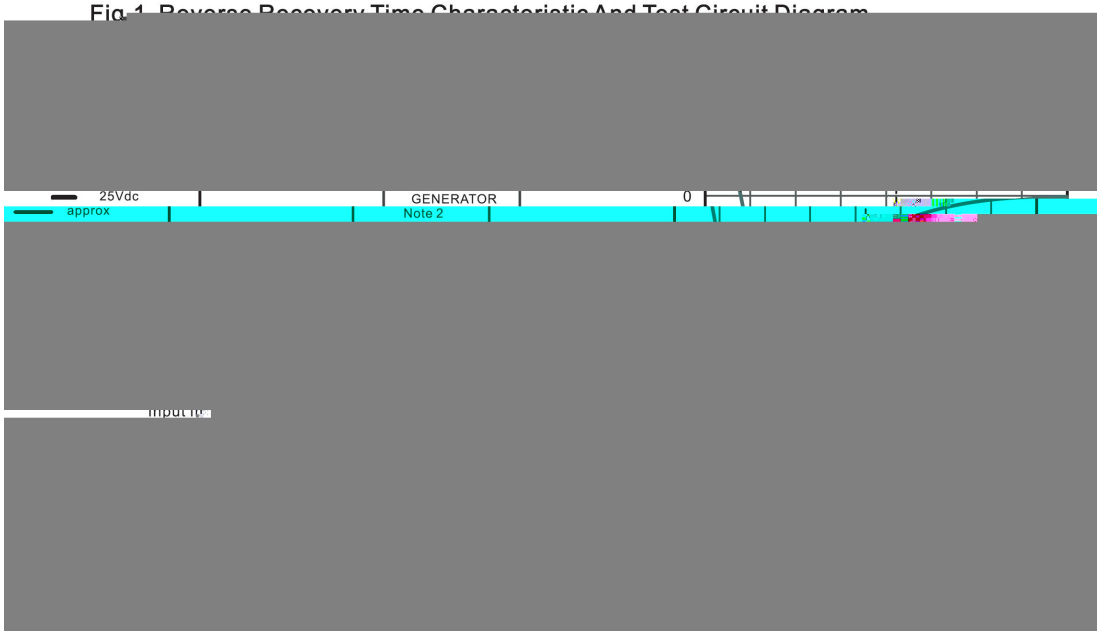


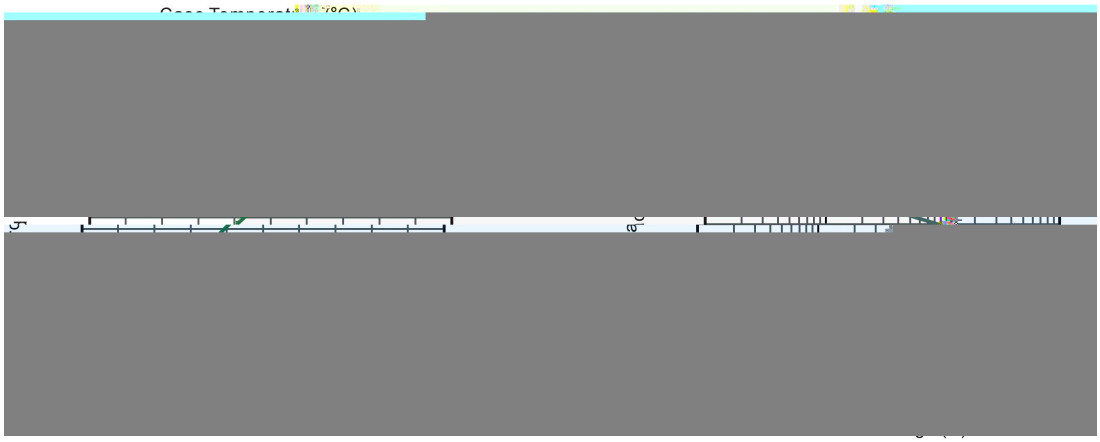


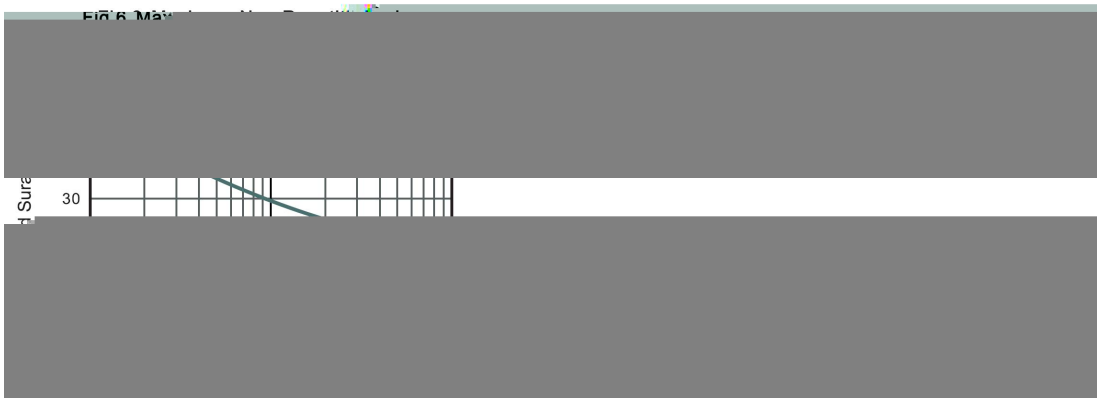


## @A B C ?

SMA

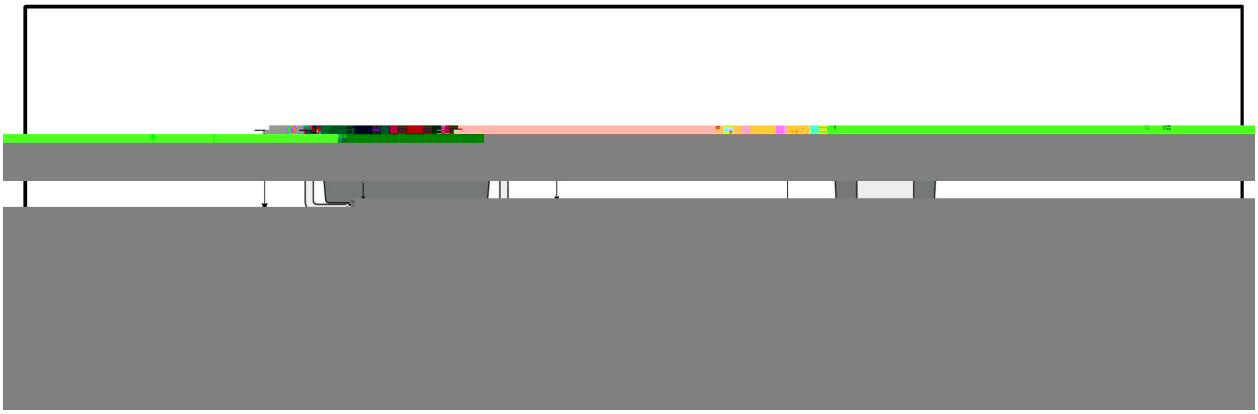


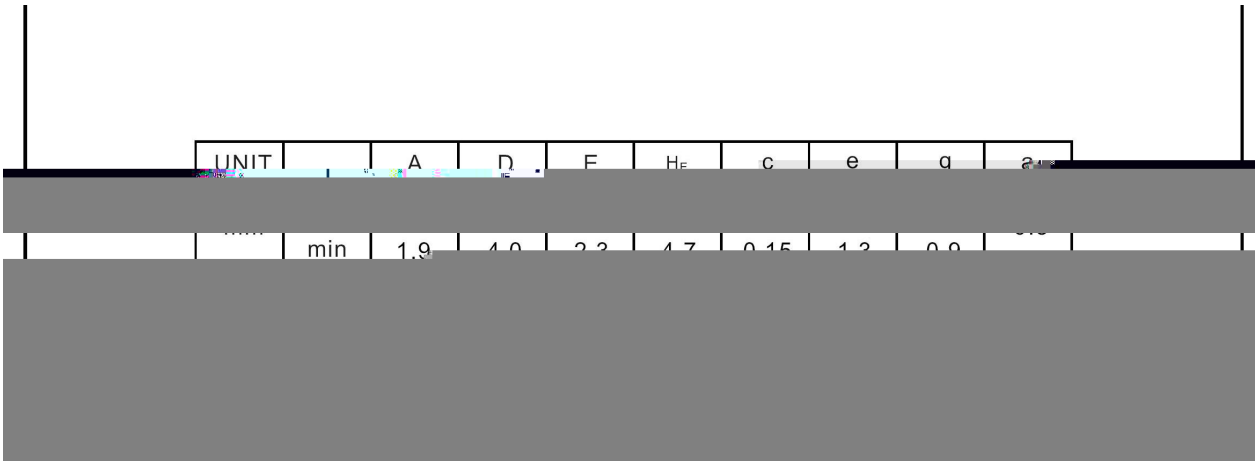

| UNIT | | A | D | E | $H_E$ | c | e | g | $a_{max.}$ |
|---|---|---|---|---|---|---|---|---|---|
| | min | 1.9 | 4.0 | 2.3 | 4.7 | 0.15 | 1.3 | 0.9 | |

Rev.A Mar.-2021

## H I J K L = > ? M N OPQRPSTUVSPGWSXYZ[PGYXSG\]G]PY[X^G_X[`PSZabcWdefSPPg

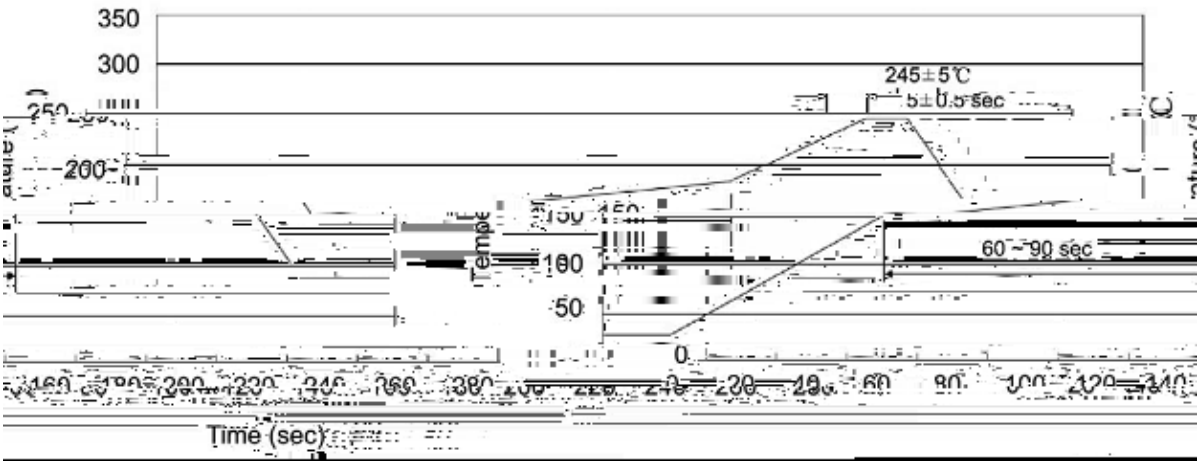


| | | | | | Note: |
|---|---|---|---|---|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180℃, Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5℃, Duration:5±0.5sec. |
| 3 | | | 2 | 10℃/sec. | 3. Cooling Speed: 2~10℃/sec. |

## h J i j k l m n

M

| | | | |
|---|---|---|---|
| 260±5℃ | 10±1 sec. | Temp.:260±5℃ | Time:10±1 sec |

## o p q r

/ REEL

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: $mm^3$) | | |
|---|---|---|---|---|---|---|---|---|
| | Units/Reel 只/卷盘 | Reels/Inner Box 卷盘/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Reel | Inner Box 盒 | Outer Box 箱 |
| SMA | [redacted] | | | | | | 336X40 | 380X335X366 |