"Yَ

2A ABS/LBF

2A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.

◕ È

100V~1000V 2.0A


Glass Passivated Chip Junction, Reverse Voltage :100 to 1000V,Forward Current: 2.0A, Fast reverse recovery time, Designed for Surface Mount Application. Halogen free product.

٭ ِ


.

General purpose.


ภ ُ ๊ ≠ ɛ



ã ﾉ ŭ



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

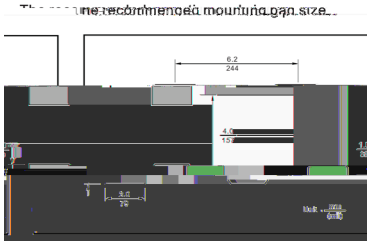


ł. ʜ ɔ̀

See Marking Instructions.


Parameter	Symbol	Rating	Unit 2

ᵘ ĖÕĻ ʃ


ABS/LBF

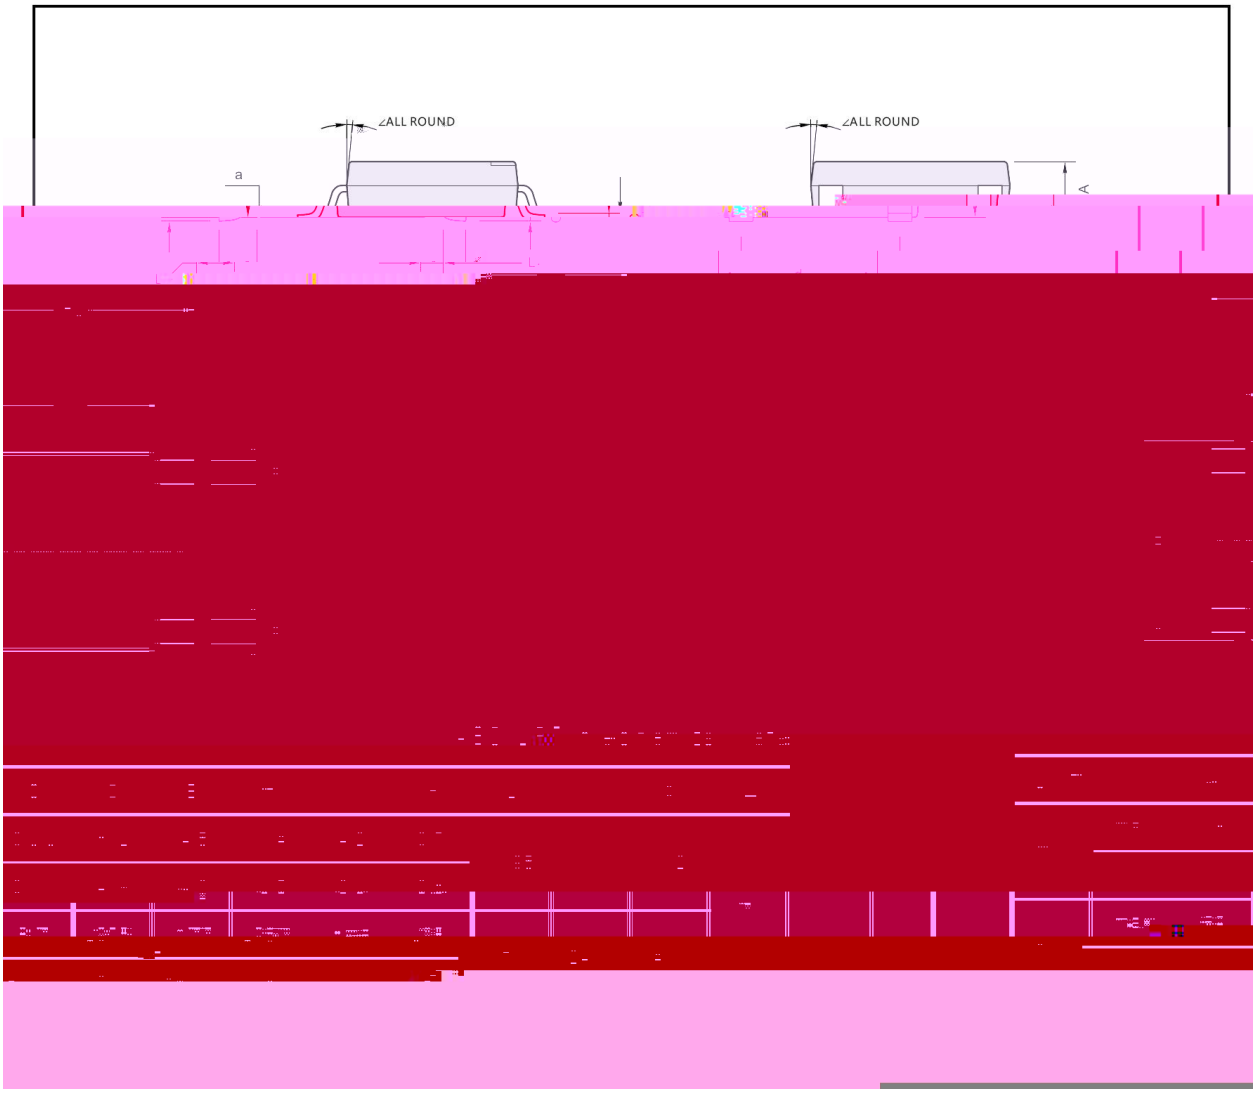

Marking

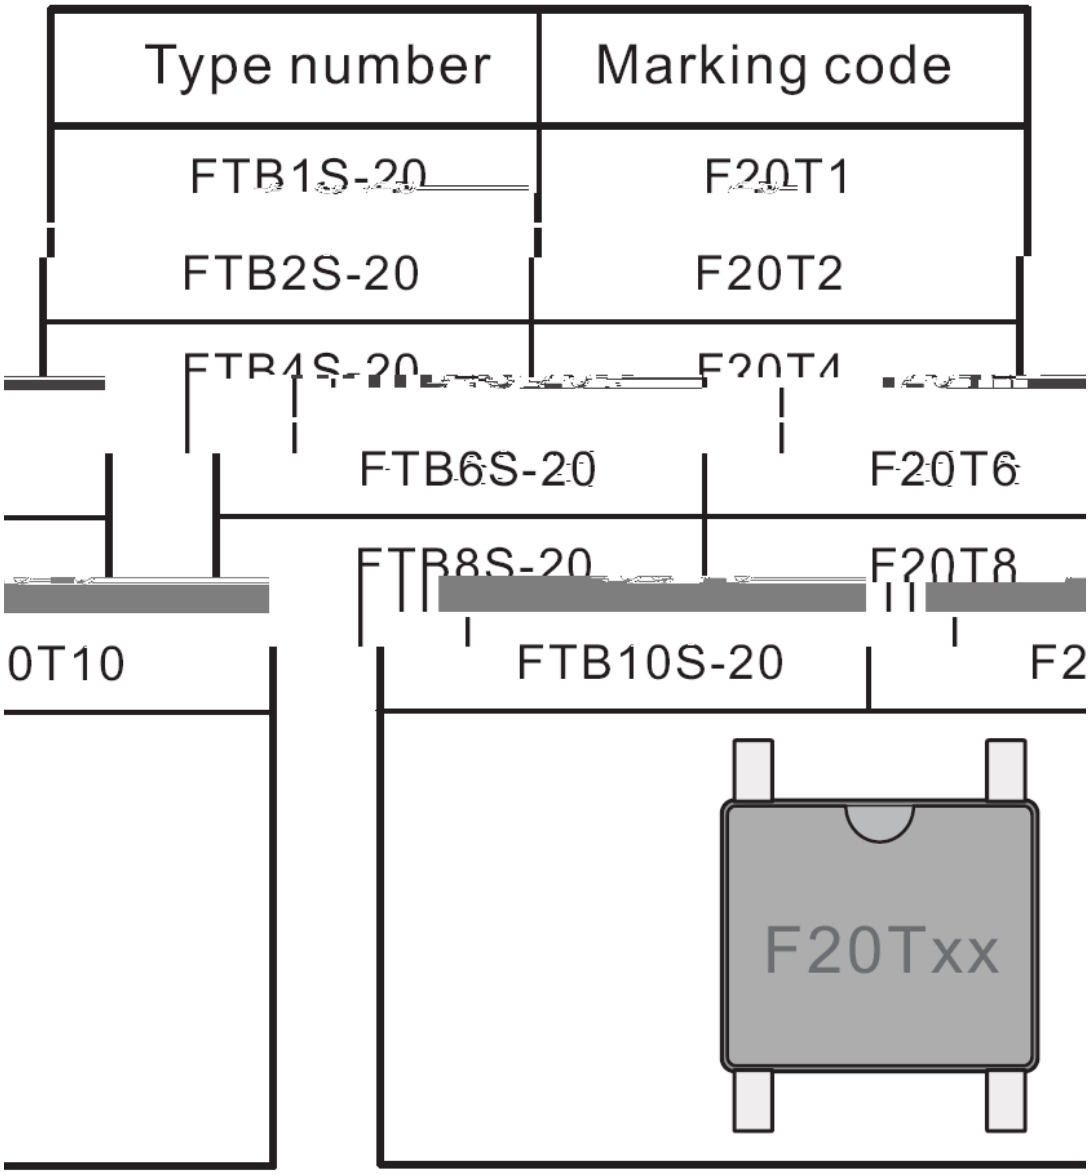
Type number
Marking code
FTB1S-20
F20T1
FTB2S-20
F20T2
FTB6S-20
F20T6
FTB8S-20
F20T8
0T10
FTB10S-20
F2
F20Txx

ł. ļ Ω

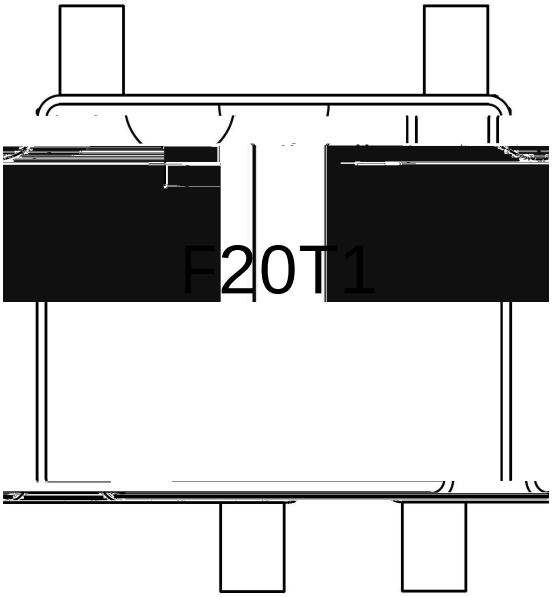

F20T1

**** 1 * 3 *

Note:

F20T1 Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code