
50~1000V 35 A GBJ

Glass Passivated Bridge Rectifiers, Reverse Voltage:50~1000V,Forward Current:35 10 ه ضد

Parameter	Symbol	Rating GBJ	Unit


/ Electrical Characteristic Curve

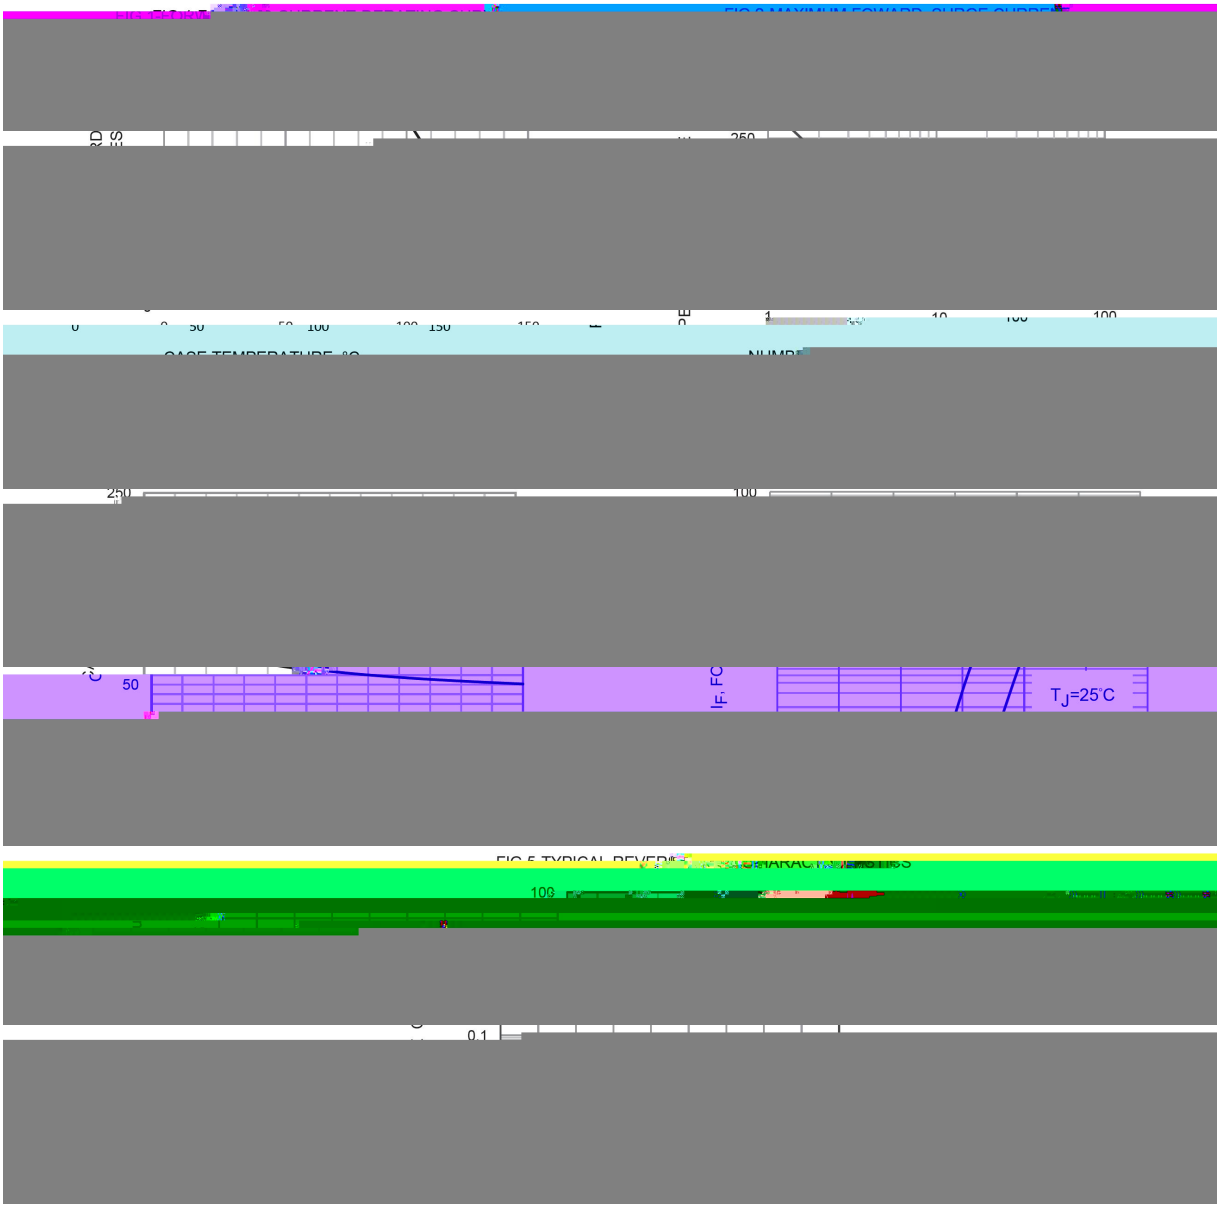

/ Package Dimensions



/ Marking Instructions

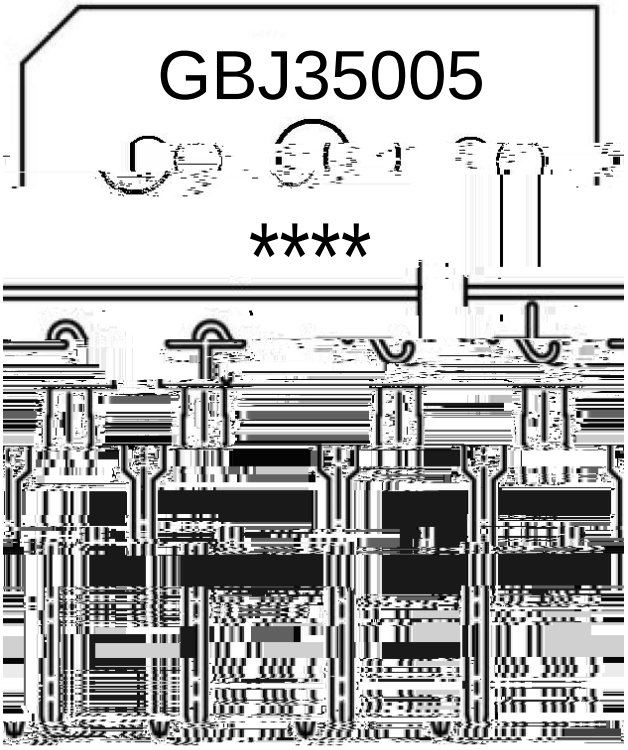


GBJ35005

****

Note:

GBJ35005:	Product Type.
****:	Lot No. Code, code change with Lot No

( ) / Temperature Profile for Dip Soldering(Pb-Free)

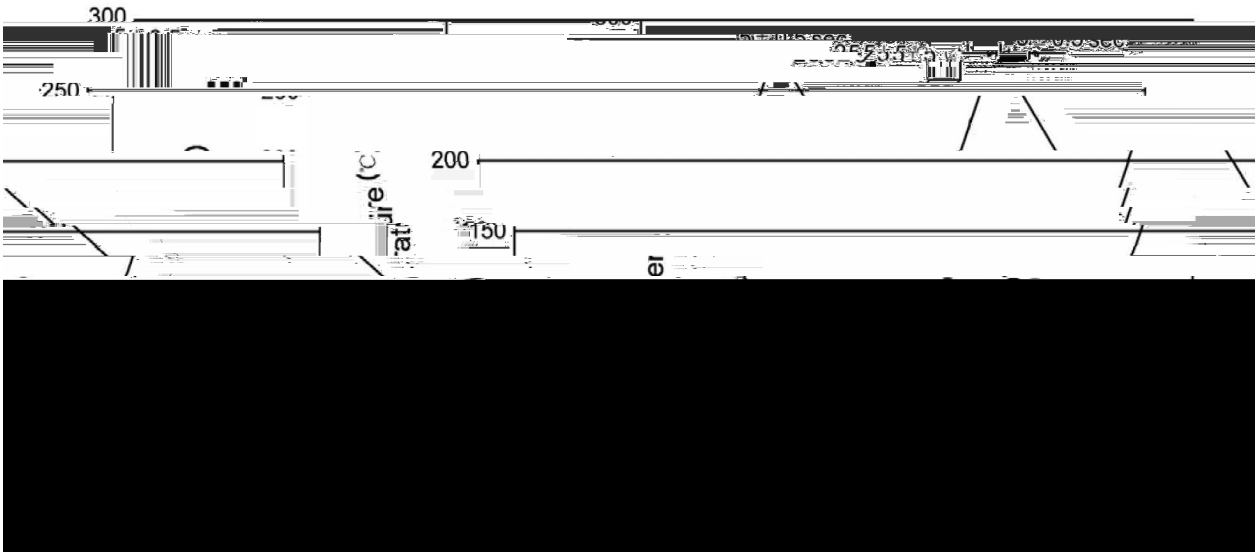

				Note:
1	25	150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5		5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3		2 10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5℃	Time:10±1 sec

/ Packaging SPEC.

/ BULK