
WR0<5 ḾḾÞ SQS ÆṀ ч s ‖ ㄱ

лъ NVG4949+D, Ӄ ´


Ɇ ˍ Ļ ı ' ѽ ᶻ / ₳ ஹ Ã Ꮒ







X X X

/ Electrical Characteristic Curve

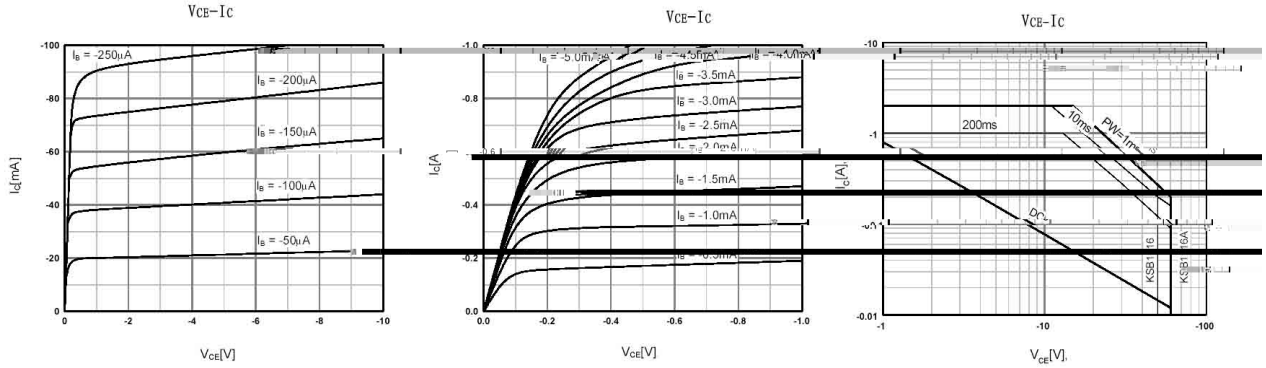

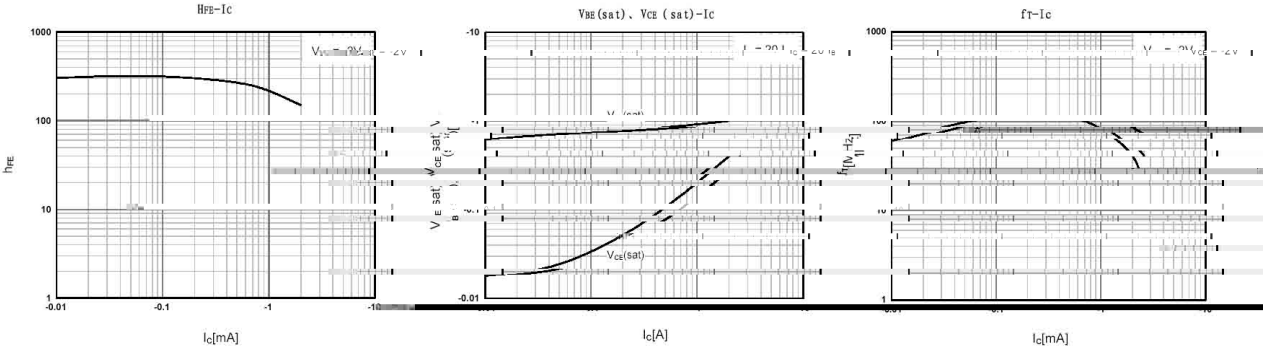


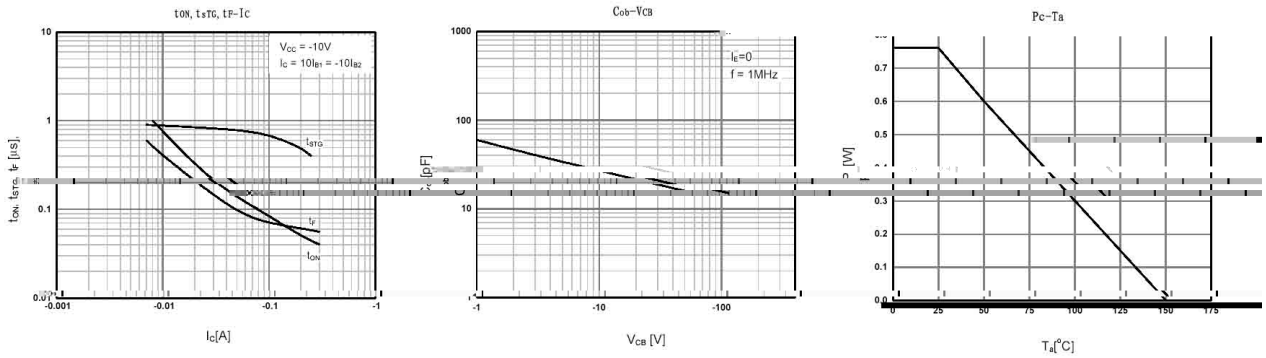

KSB1116(A)

DATA SHEET

/ Marking Instructions

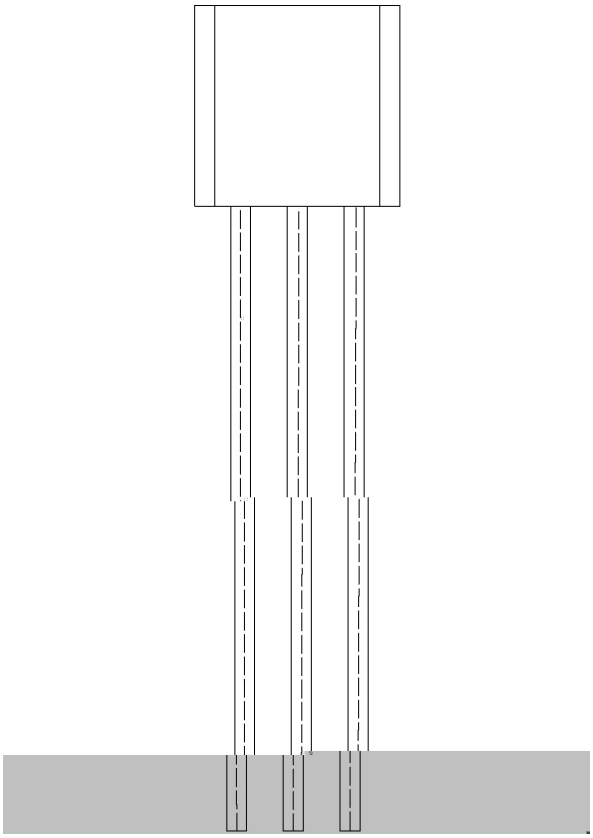


ᓚ ᵔ χ

EU= ᵻᵡ ᵹ ᴺ ᑎᑫ

E4449 χ ᵻᵡ ᵷ ᴺ ᑎᑫ

( ) / Temperature Profile for Dip Soldering(Pb-Free)

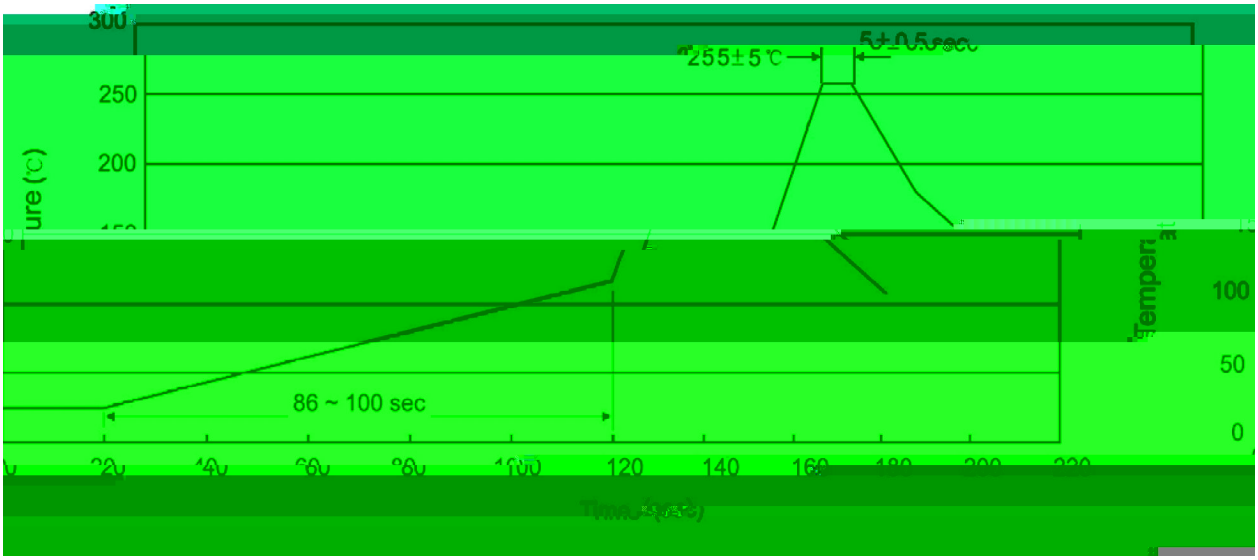

ب ˝ χ

Ĺ ♬ □ ỷ Ḱ ɬ ı ˋH ژ Ḱ ɬ

Š Ө □ ỷ ° ɬ ı ˋH ژ ˋY ﾊ ㎞ ° ° ɬ °

ì ˙ ﾘ ˛ ɔ ଌ ỷ ㎞ Ḱ ɬ ɬ

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ ° ɬ ˋH ژ χ °

/ Packaging SPEC.

ˊQ ţ ﾘ Ł