/ Descriptions

SOT-23 NPN Silicon NPN transistor in a SOT-23 Plastic Package.


/ Features

Low frequency.


/ Applications

Low frequency amplifier.

/ Equivalent Circuit



/ Pinning




PIN 1 Base PIN 2 Emitter PIN 3 Collector


/ h_{FE} Classifications & Marking


h_{FE} Classifications Symbol	O	Y
h_{FE} Range	100 200	160 320
Marking	HK1O	HK1Y


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	30	V
Collector to Emitter Voltage	V_{CEO}	25	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current	I_C	800	mA
Base Current	I_B	160	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	
Storage Temperature Range			

/ Electrical Characteristic Curve

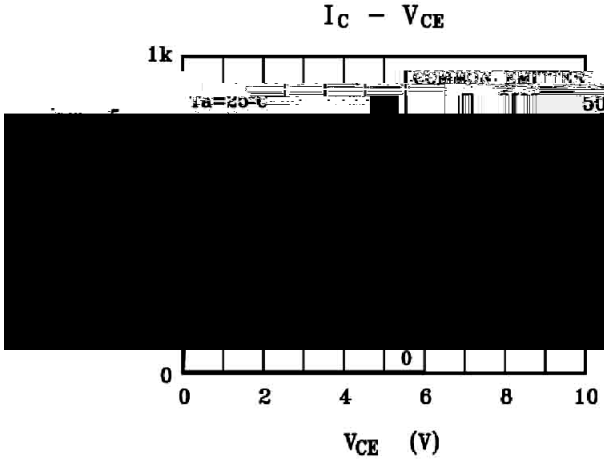


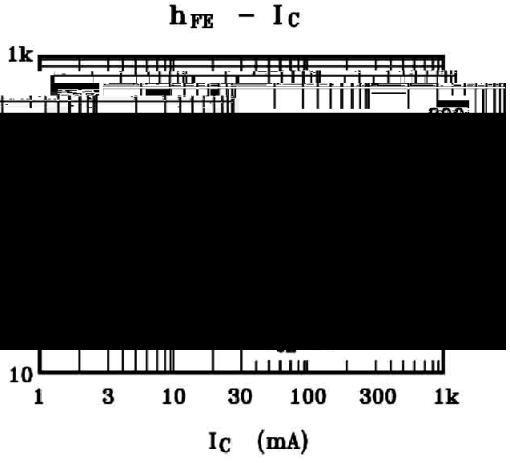

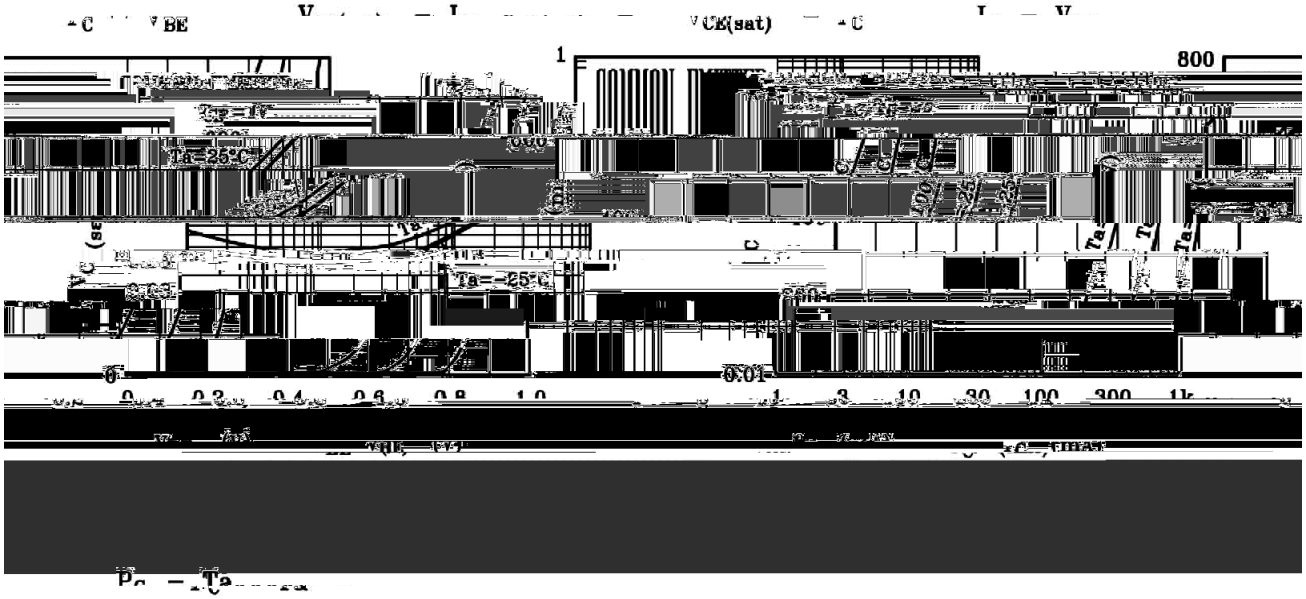


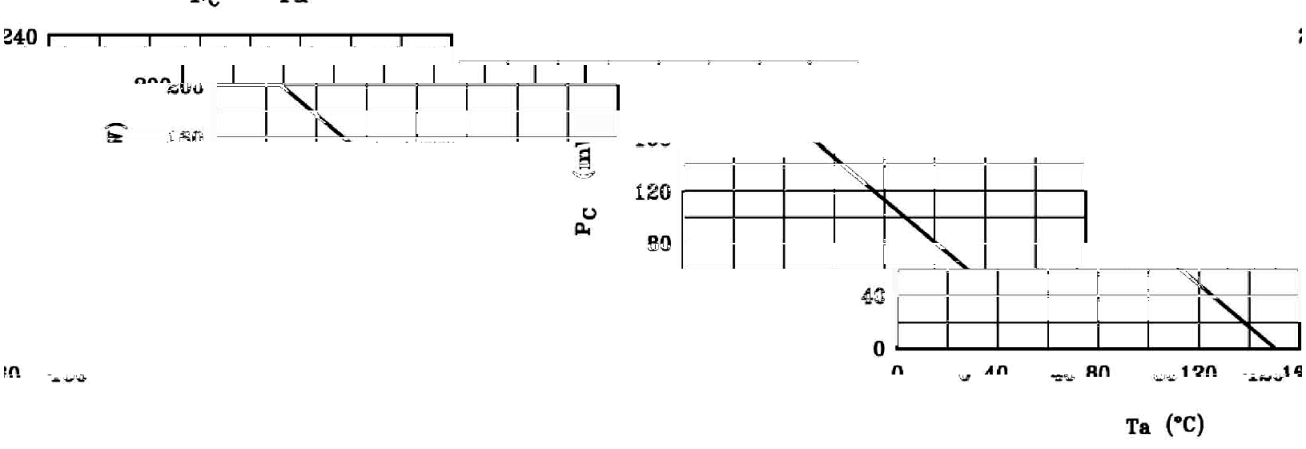

/ Package Dimensions

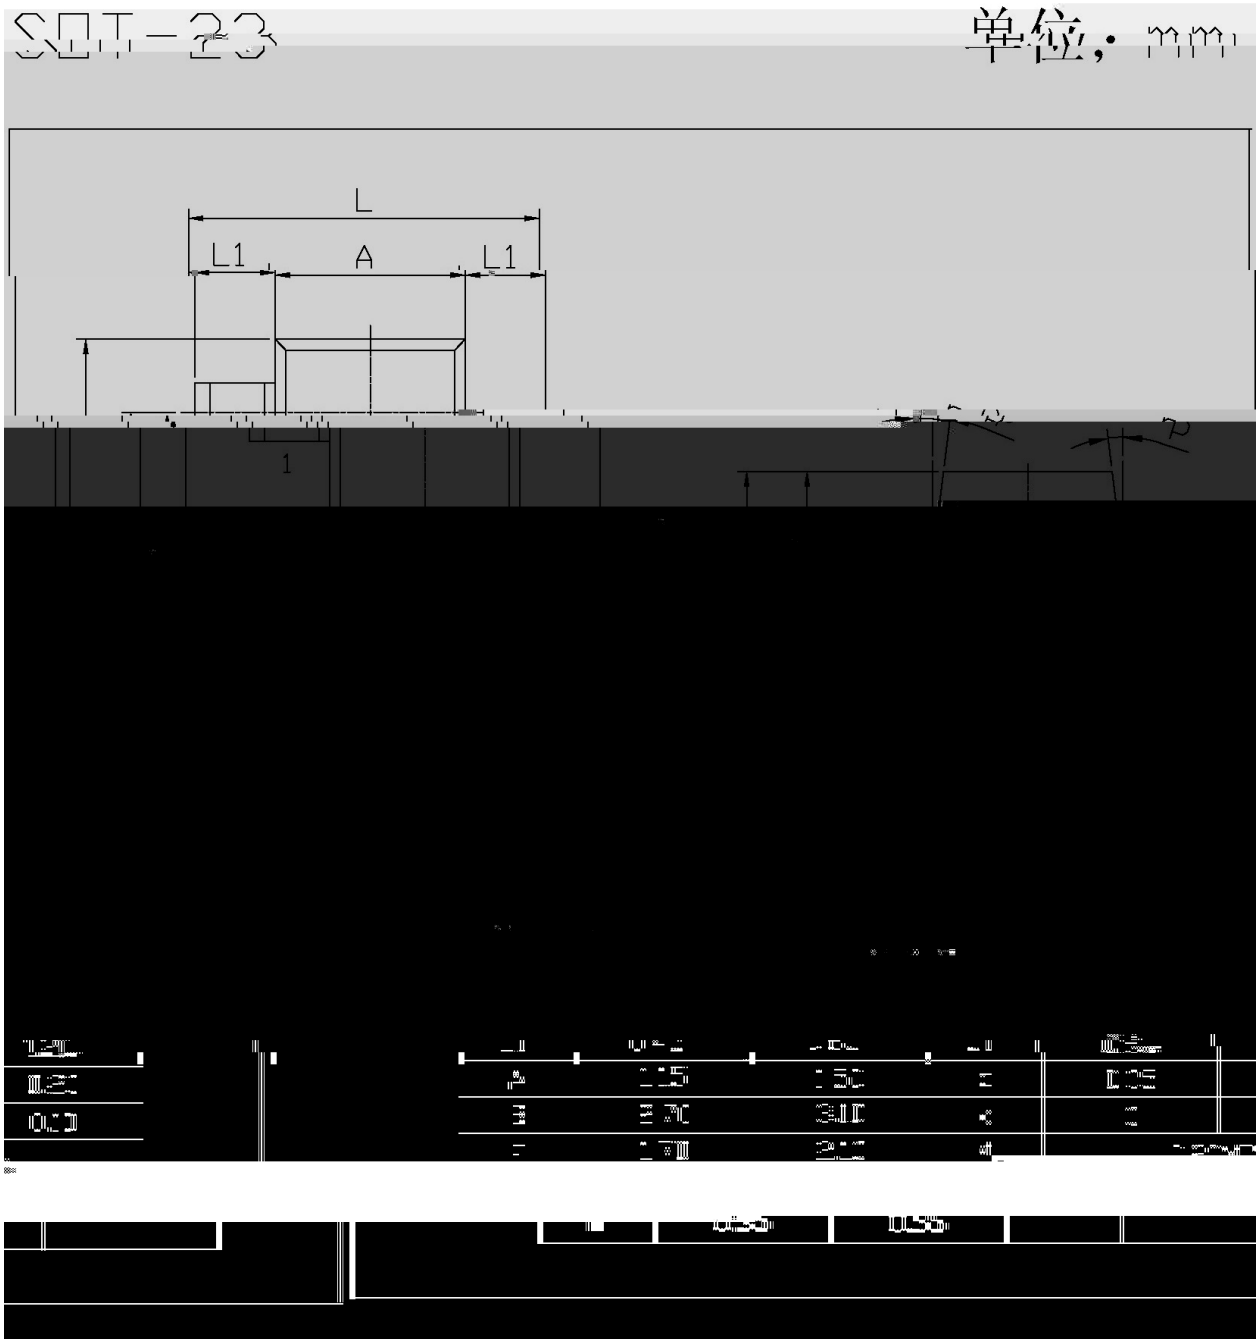

/ Marking Instructions

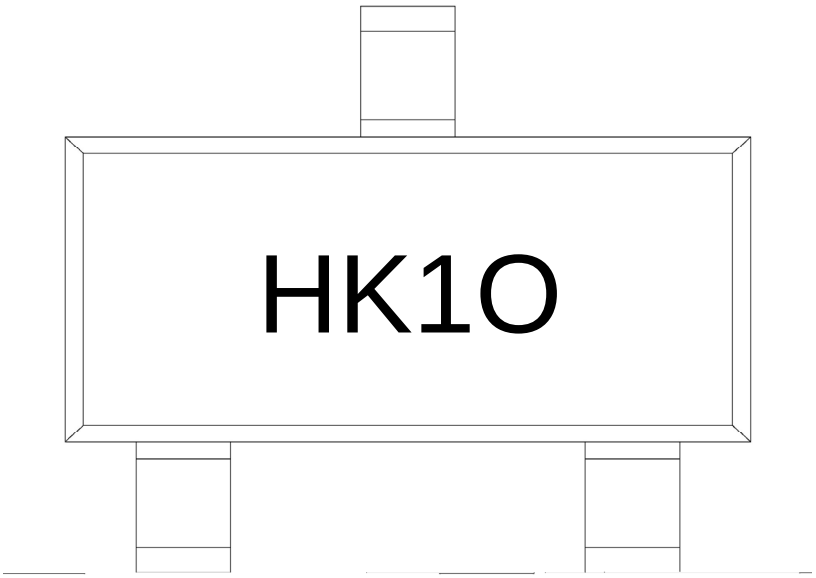

H

K1

O h_{FE}

Note:

H	Company Code
K1	Product Type
O	h_{FE} Classifications Symbol