Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-120	V
Collector to Emitter Voltage	V_{CEO}	-120	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-800	mA
Emitter Current - Continuous	I_E	800	mA
Collector Power Dissipation	P_C	1.0	W

tag

/ Electrical Characteristic Curve

I_C - V_{CE}




h_{FE} - I_C




$V_{CE(sat)}$ - I_C



I_C - V_{BE}




P_C - T_a

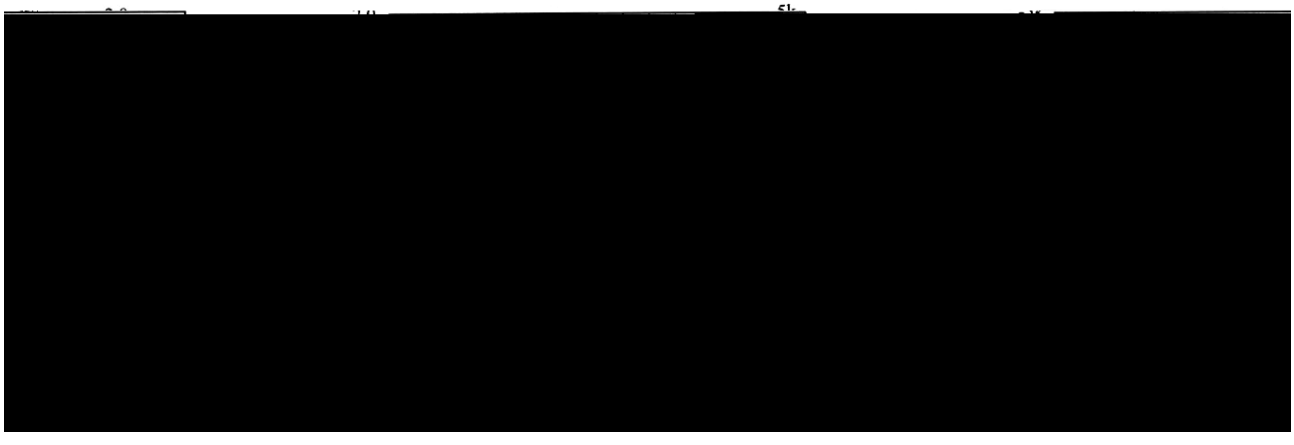


AREA OF SAFE OPERATION

/ Package Dimensions

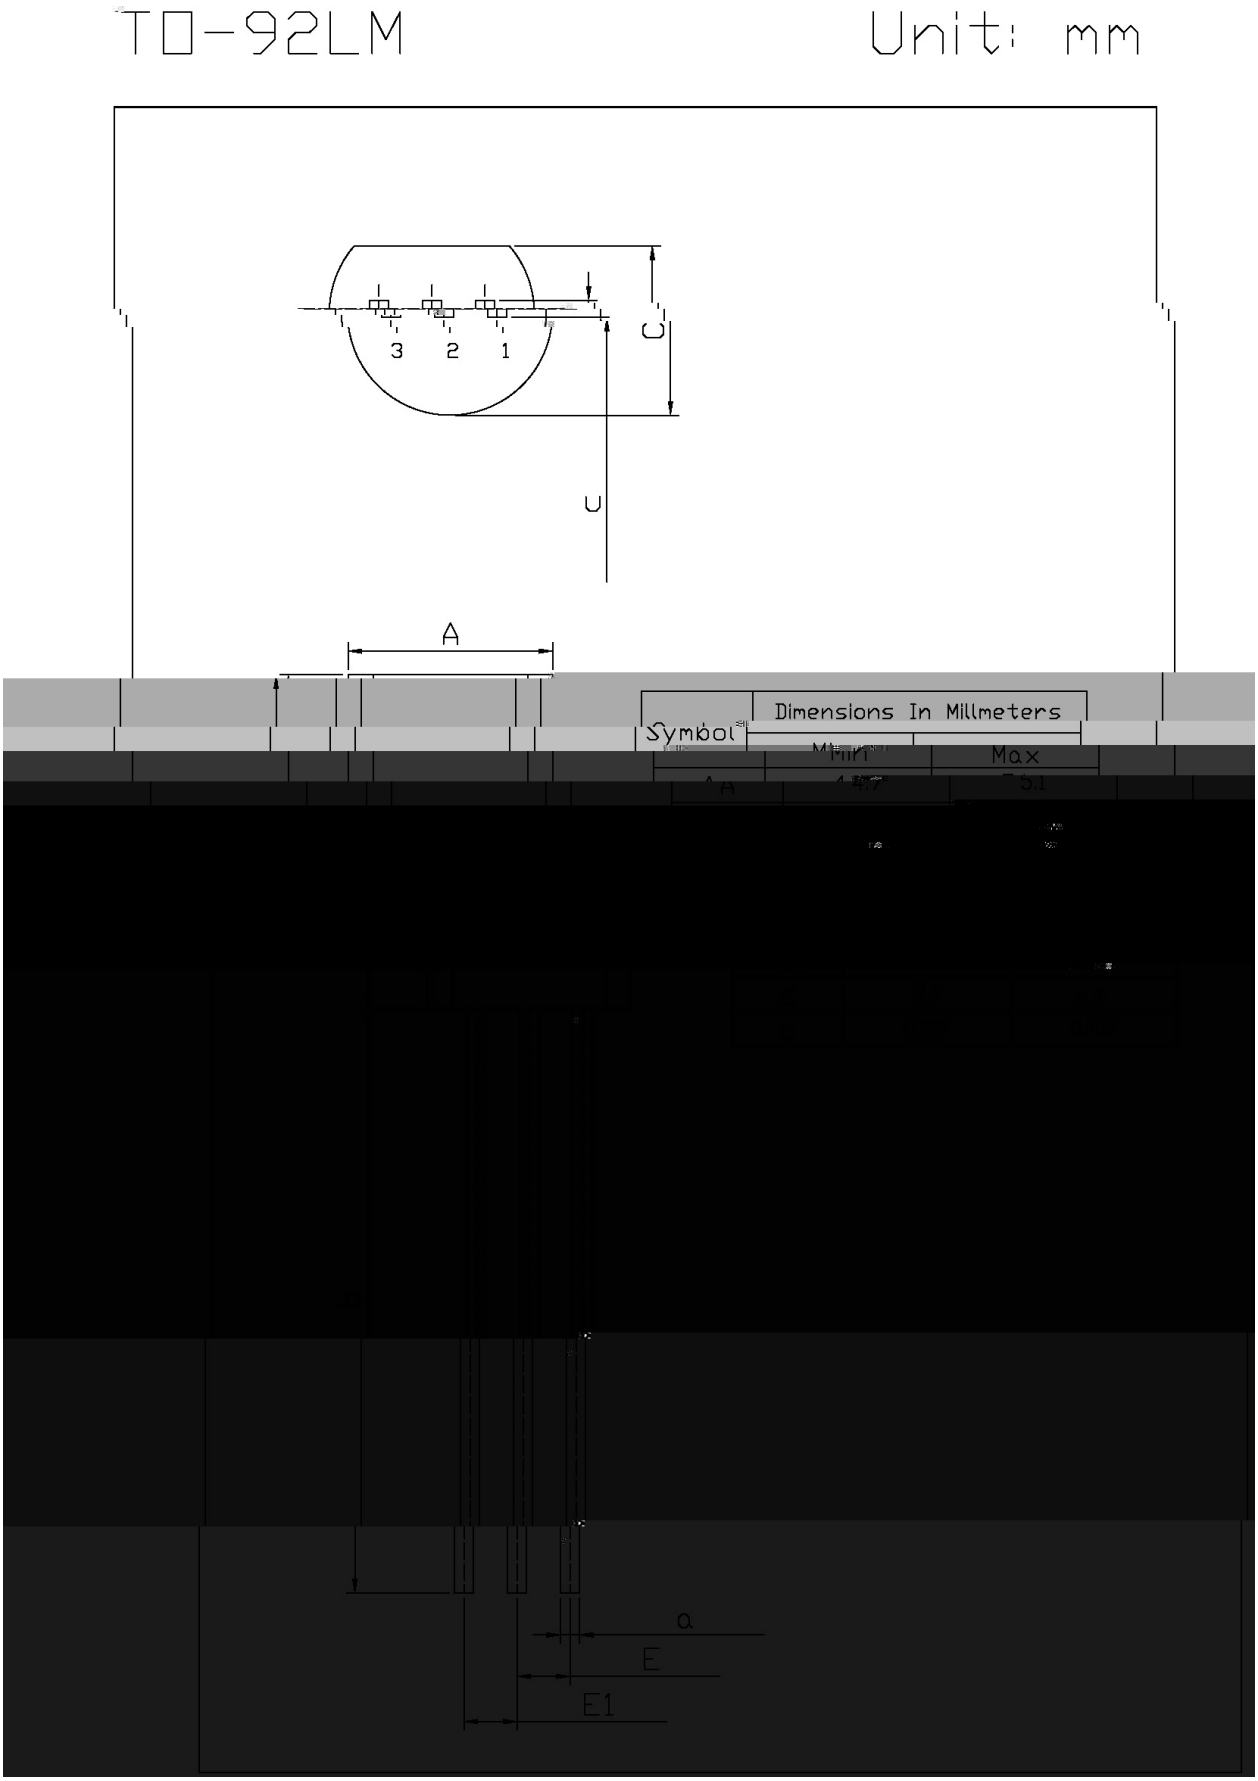

/ Marking Instructions

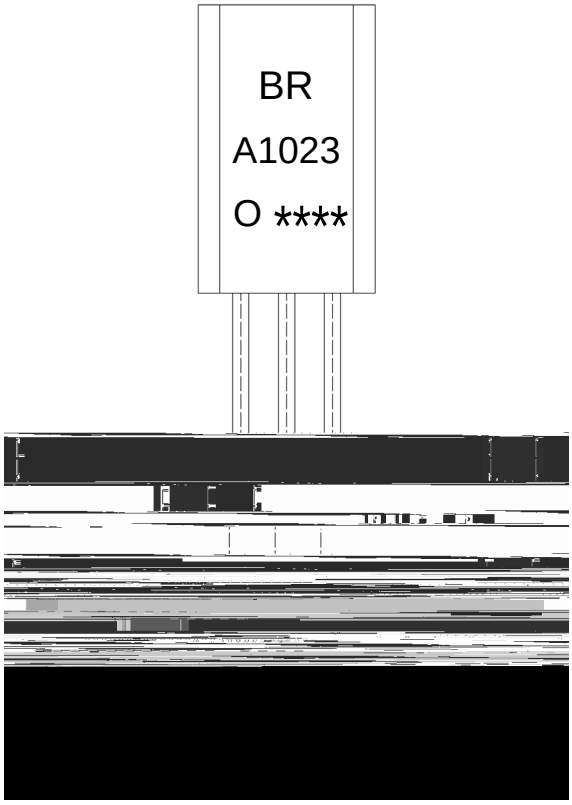

BR:

A1023

O: h_{FE}

****

Note:

BR:	Company Code.
A1023:	Product Type.
O:	h_{FE} Classifications Symbol
****:	Lot No. Code,code change with Lot No.

KTA1023