

SOT-89 PNP




| Parameter | Symbol | Rating | Unit |
|---|---|---|---|
| Collector to Base Voltage | | | |

## ≠ ∃ ЎĄ´E ∀ ƒ / Electrical Characteristic Curve

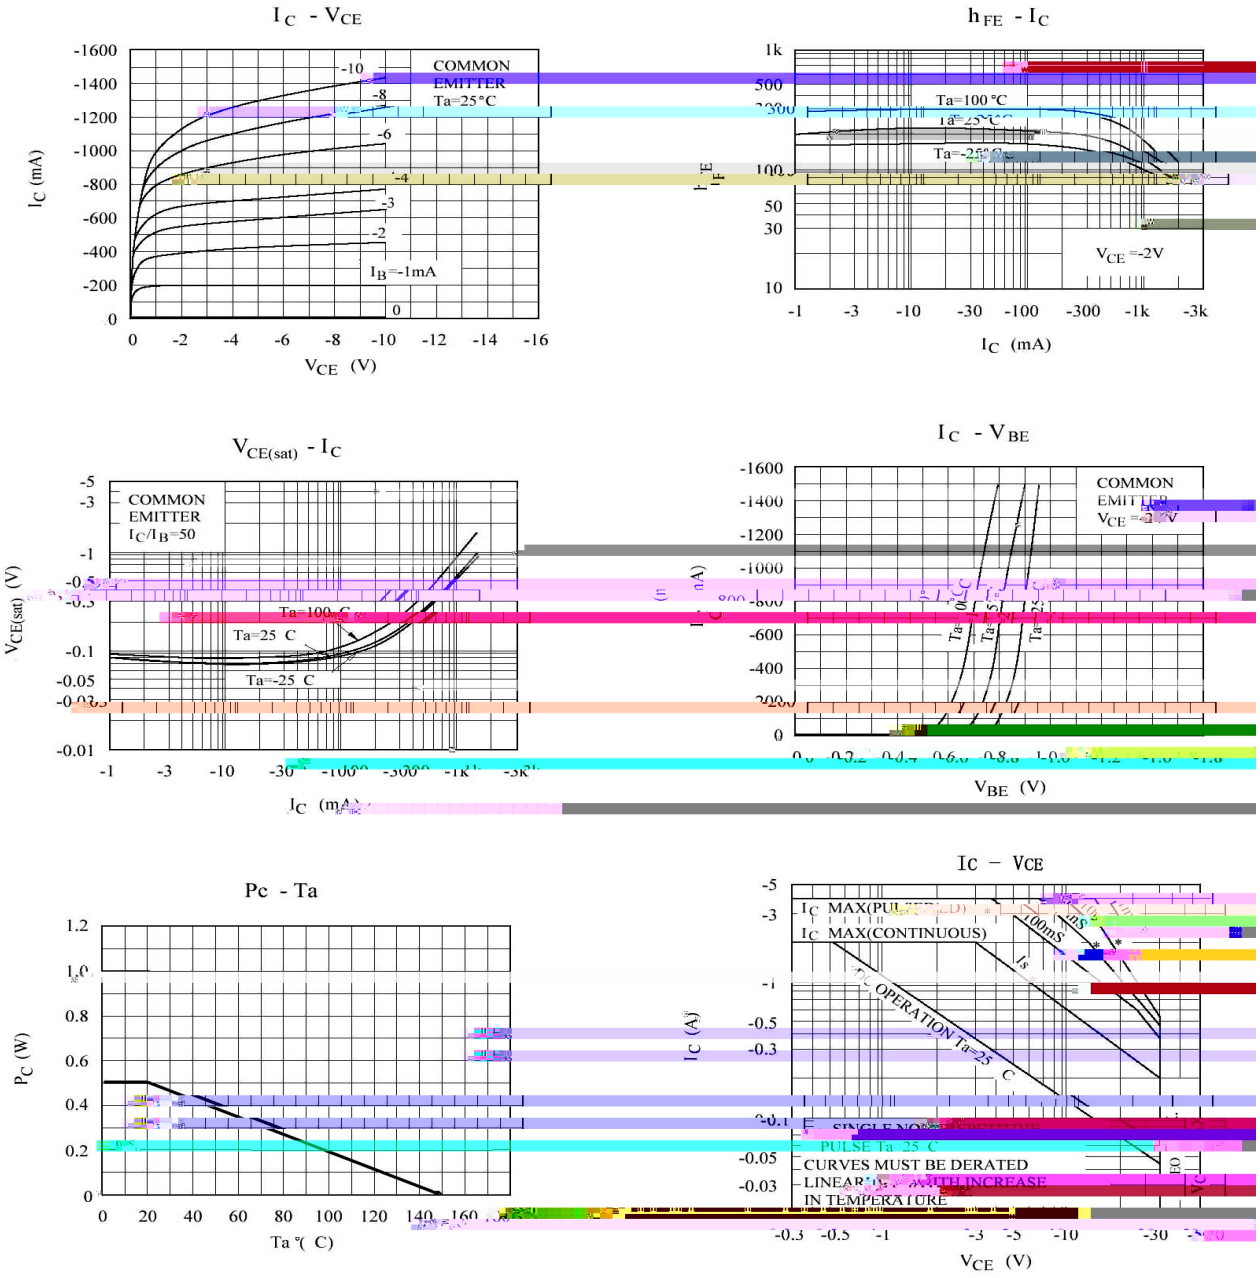

**KTA1273T**

## Ł. Ł'Ω / Marking Instructions

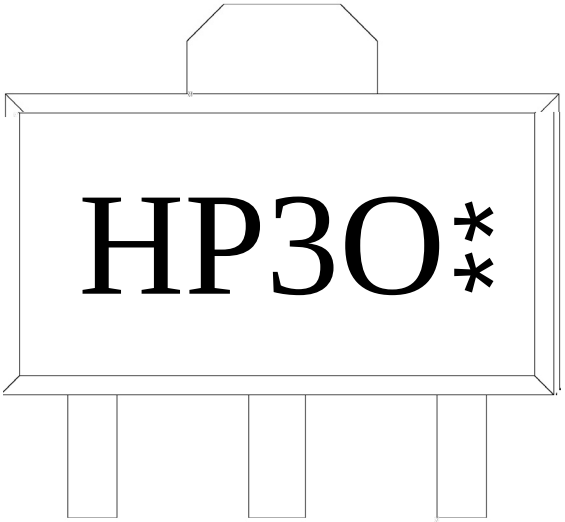


H

P3

O $h_{FE}$

**

Note:


H: Company Code.

P3: Product Type.

O $h_{FE}$ Classifications Symbol

**: Lot No. Code, code change with Lot No.

## ЮЋ ∫ ╕ẘ´E ⅵ ƒ (ѽ ѕ) / Wh p shudwxuh Suril oh i ru LU Uhio r z Vroghulq j+Se0luhh,

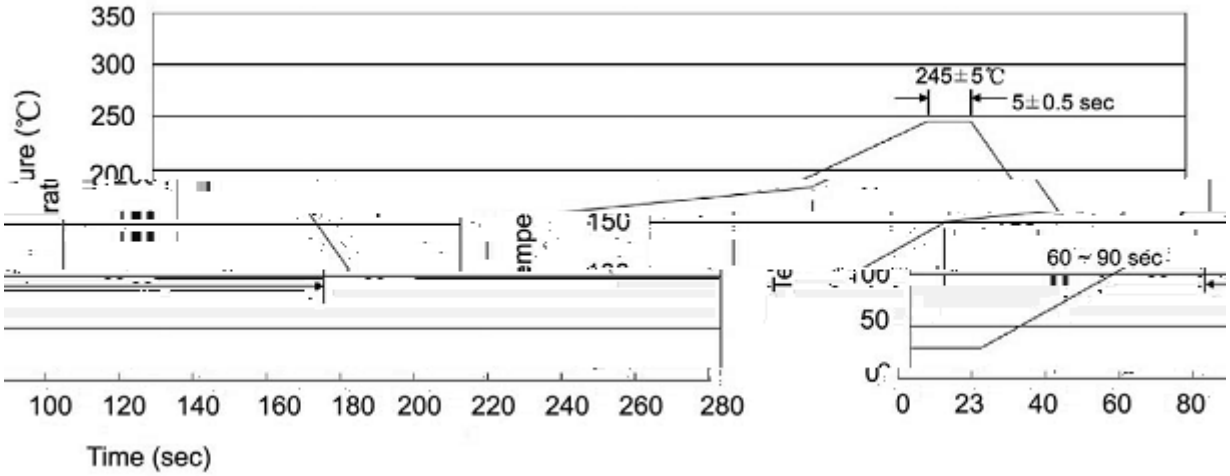


Note:

| | | | | | |
|---|---|---|---|---|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

## ⅃ ü q ‾ `Y Ţ / Resistance to Soldering Heat Test Conditions

| | | | |
|---|---|---|---|
| 260±5 | 10±1 sec. | Temp.:260±5 | Time:10±1 sec |

## ɔ Ł ≤— / Packaging SPEC.

/ REEL

| Package Type 封 ⅄ 、 | Units 包 量 | | | | | Dimension 包 尺寸 (unit: $mm^3$) | | |
|---|---|---|---|---|---|---|---|---|
| | Units/Reel /卷盘 | Reels/Inner Box 卷盘/盒 | Units/Inner Box /盒 | Inner Boxes/Outer Box 盒/ | Units/Outer Box / | Reel | Inner Box 盒 | Outer Box |
| SOT-89 | 1,000 | 7 | 7,000 | 8 | 56,000 | 7 ×12 | 180×120×180 | 385×257×392 |

## ä ѵ ŗ Ω / Notices