
50V~1000V 1.0A SMA

Parameter	Symbol	Rating	Unit


@A B C ? / Package Dimensions

SMA

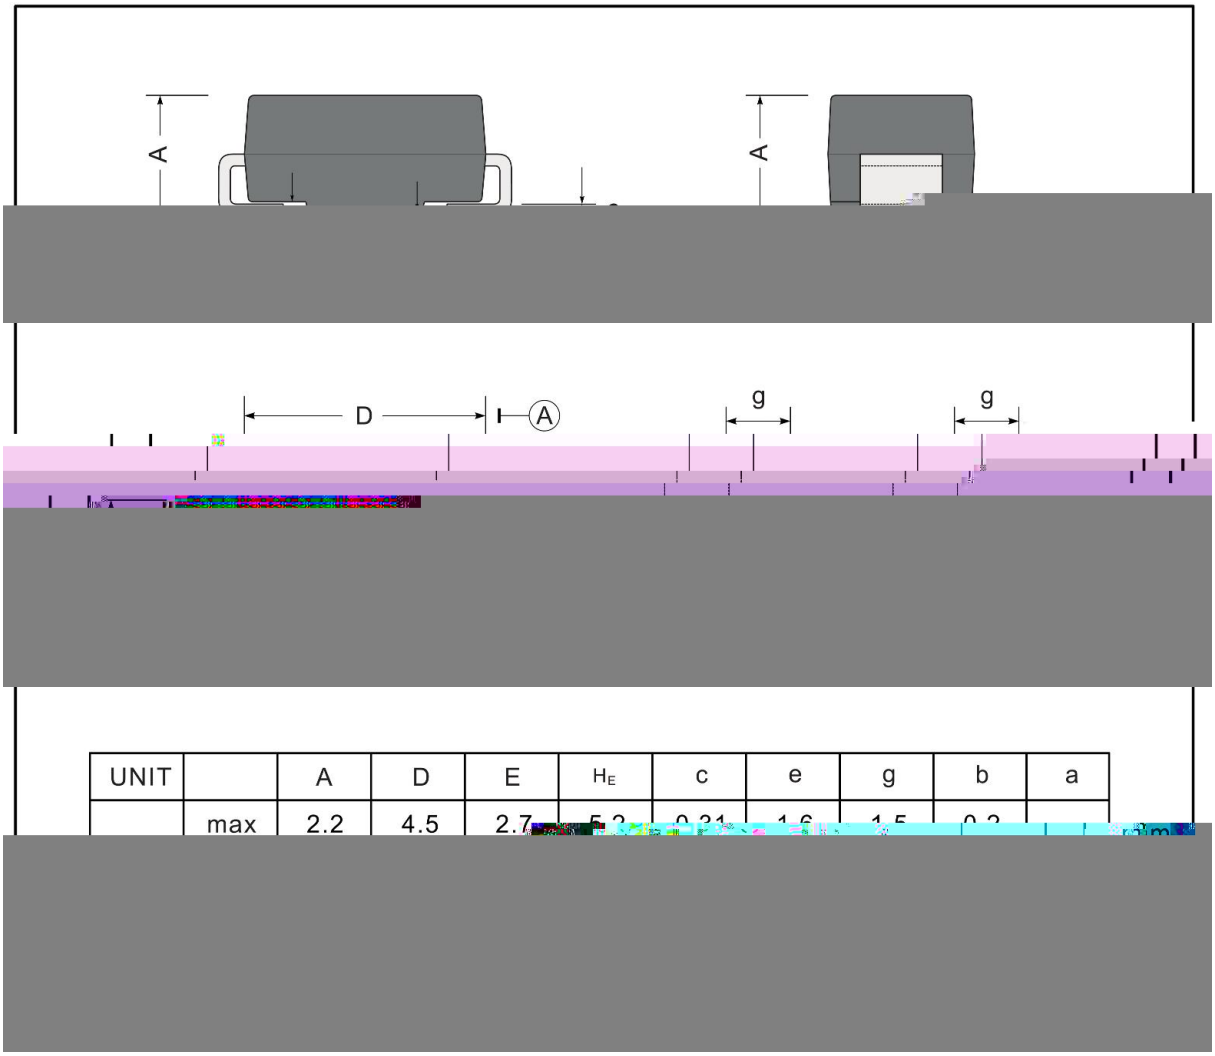

UNIT		A	D	E	H_E	c	e	g	b	a
	max	2.2	4.5	2.7	5.2	0.31	1.6	1.5	0.2	

" # D E / Marking Instructions

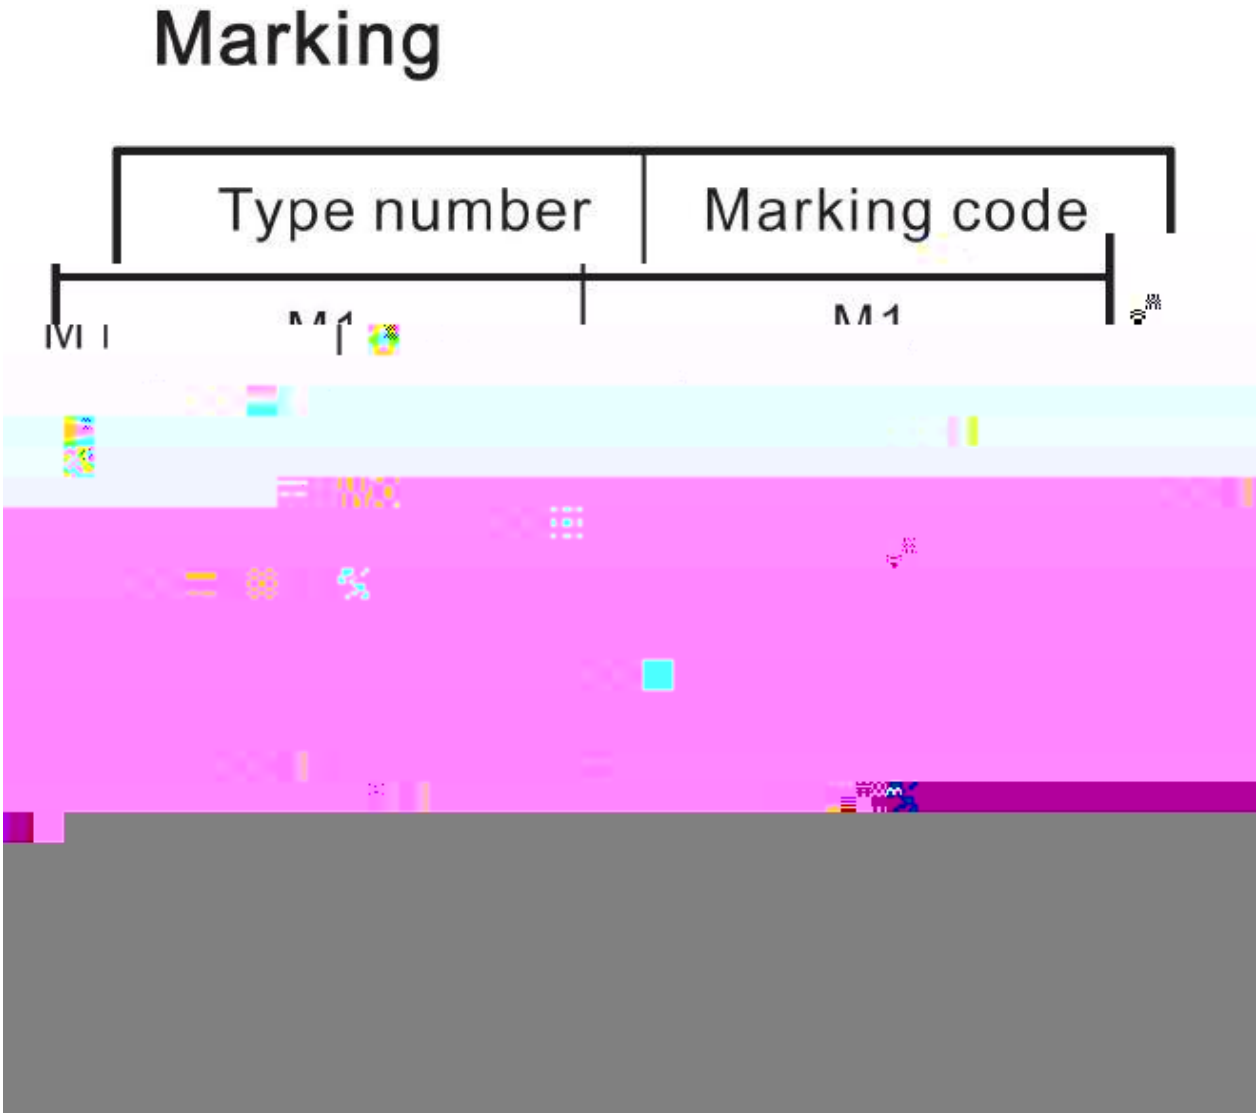

H I J K L = > ? (M N) / OPQRPSTUVSPGWSXYZ[PGYXSG\]G]PY[X^G_X[`PSZabcWdefSPPg

Note:

1 150 180 60 90sec; 1.Preheating:150~180℃, Time:60~90sec.

2 245±5 5±0.5sec; 2.Peak Temp.:245±5℃, Duration:5±0.5sec.

3 2 10℃/sec. 3. Cooling Speed: 2~10℃/sec.

h J i j k l m n / Resistance to Soldering Heat Test Conditions

260±5℃ 10±1 sec. Temp.:260±5℃ Time:10±1 sec

o p q r / Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Reel /	[redacted]	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box 盒	Outer Box 箱