
v Ѭ Parameter	ϒ N Symbol	Ѭ Ө Rating						D Ч Unit
		MB1S-05	MB2S-05	MB4S-05	MB6S-05	MB8S-05	MB10S-05	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V

/ Package Dimensions

MBS

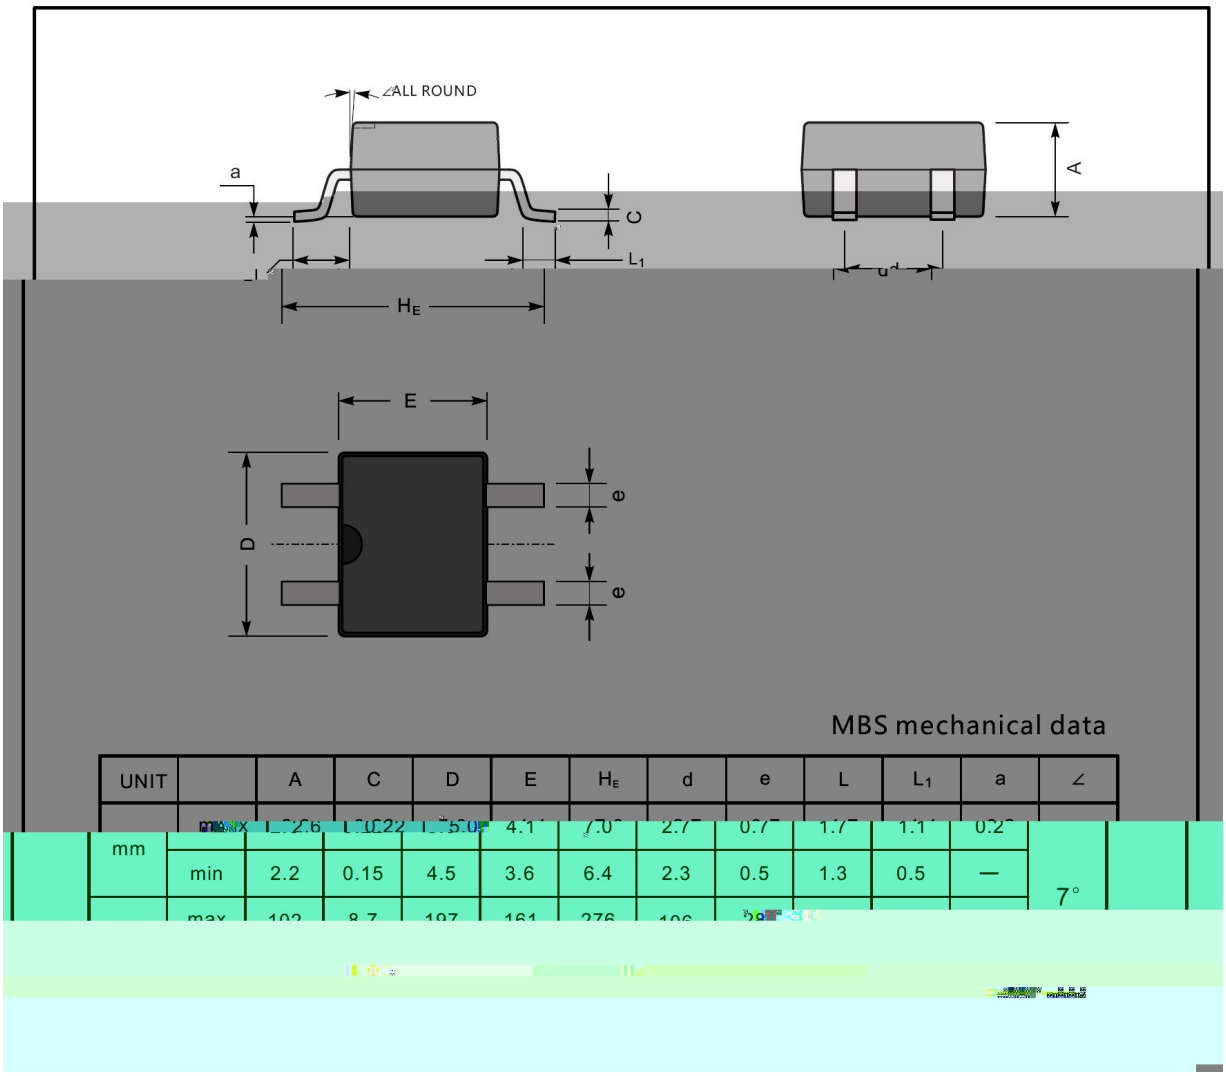


MBS mechanical data


UNIT		A	C	D	E	H_E	d	e	L	L_1	a	∠
mm	max	[illegible]	[illegible]	[illegible]	4.1[illegible]	7.0[illegible]	2.7[illegible]	0.7[illegible]	1.7[illegible]	1.1[illegible]	0.2[illegible]	
	min	2.2	0.15	4.5	3.6	6.4	2.3	0.5	1.3	0.5	—	7°
	max	10[illegible]	8.7	19[illegible]	16[illegible]	27[illegible]	10[illegible]	[illegible]				

/ Marking Instructions

Marking

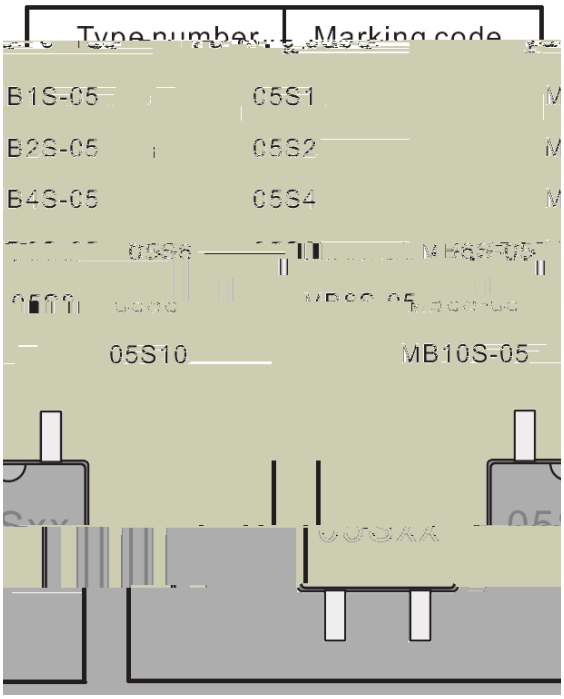

/ Marking Instructions

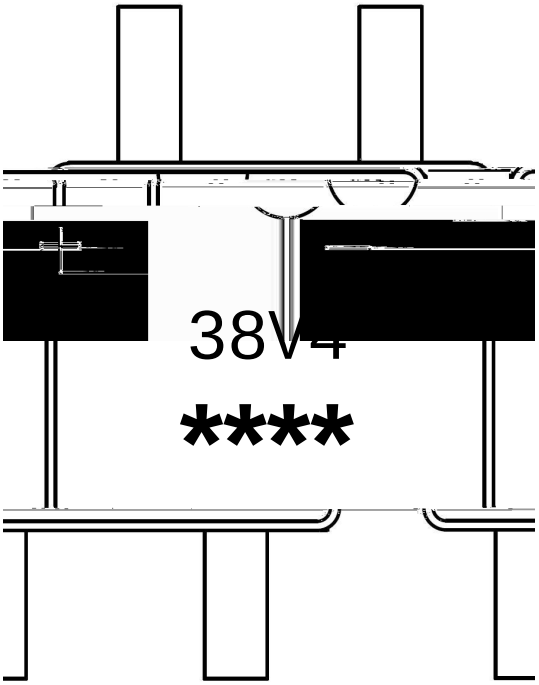

ب ˝ χ

38V4 χ ѫ ʒ ᴺ Ђ

**** χ ѫ ɨ ғ ӈ ᴺ ڳ . ɪ ᵛ 4 Ѧ*ѫ ẉ ώ Ђ ɪ ᵅ ˭ 6 Ѧ*ѫ Ẹ ώ ṇ ӈ ᴺ Ђ

Note:

38V4 χ Product Type Code

**** χ Lot No. Code ɪ The 1st * means:YM Code ɪ The last 3 * means:little Lot No Code