
/ Descriptions

TO-220

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Electrical Characteristic Curve




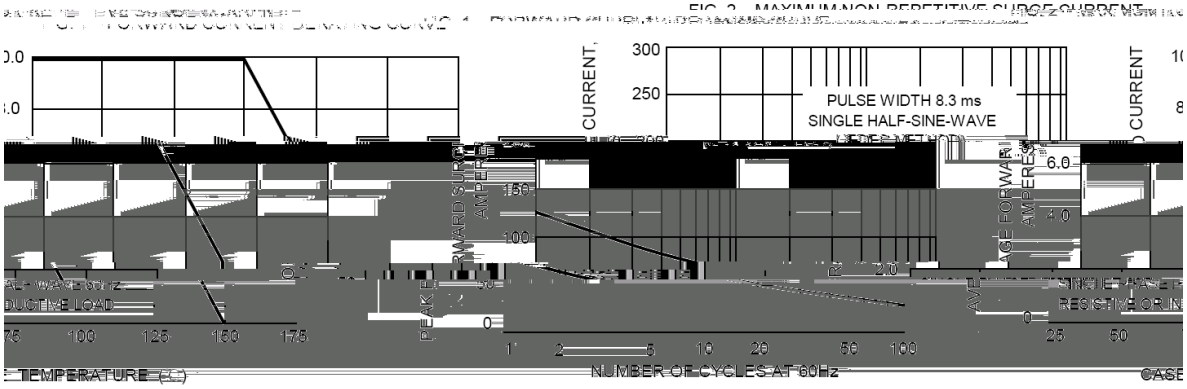


FIG.4-TYPICAL FORWARD CHARACTERISTICS

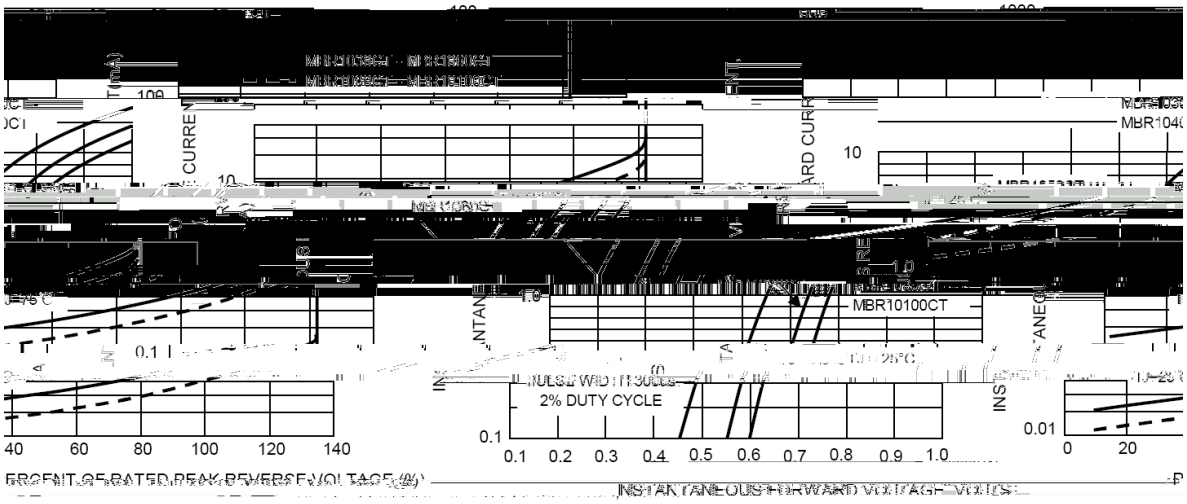


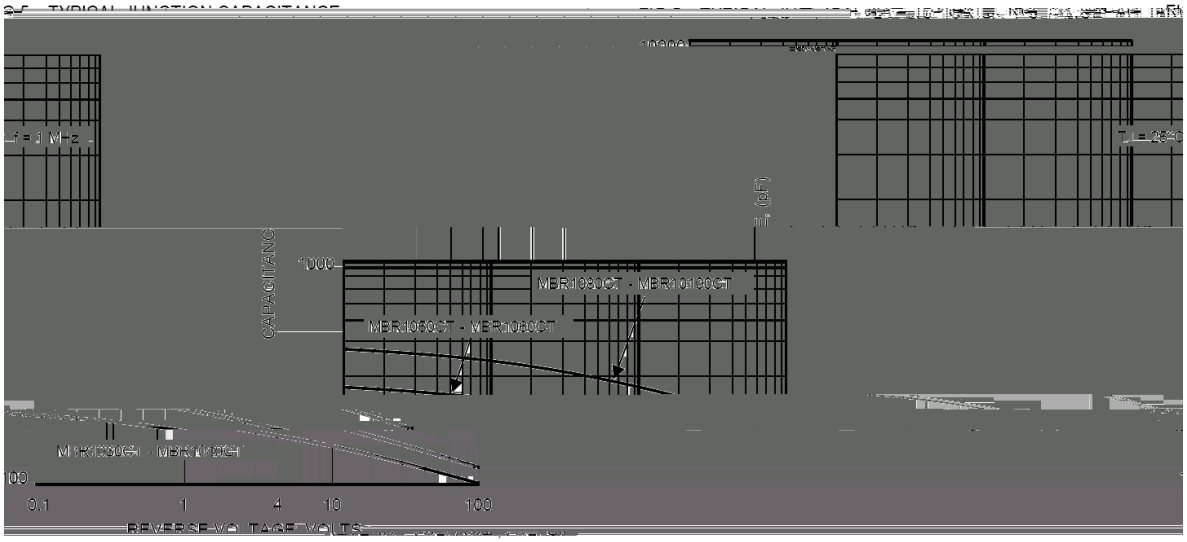

/ PackageDimensions

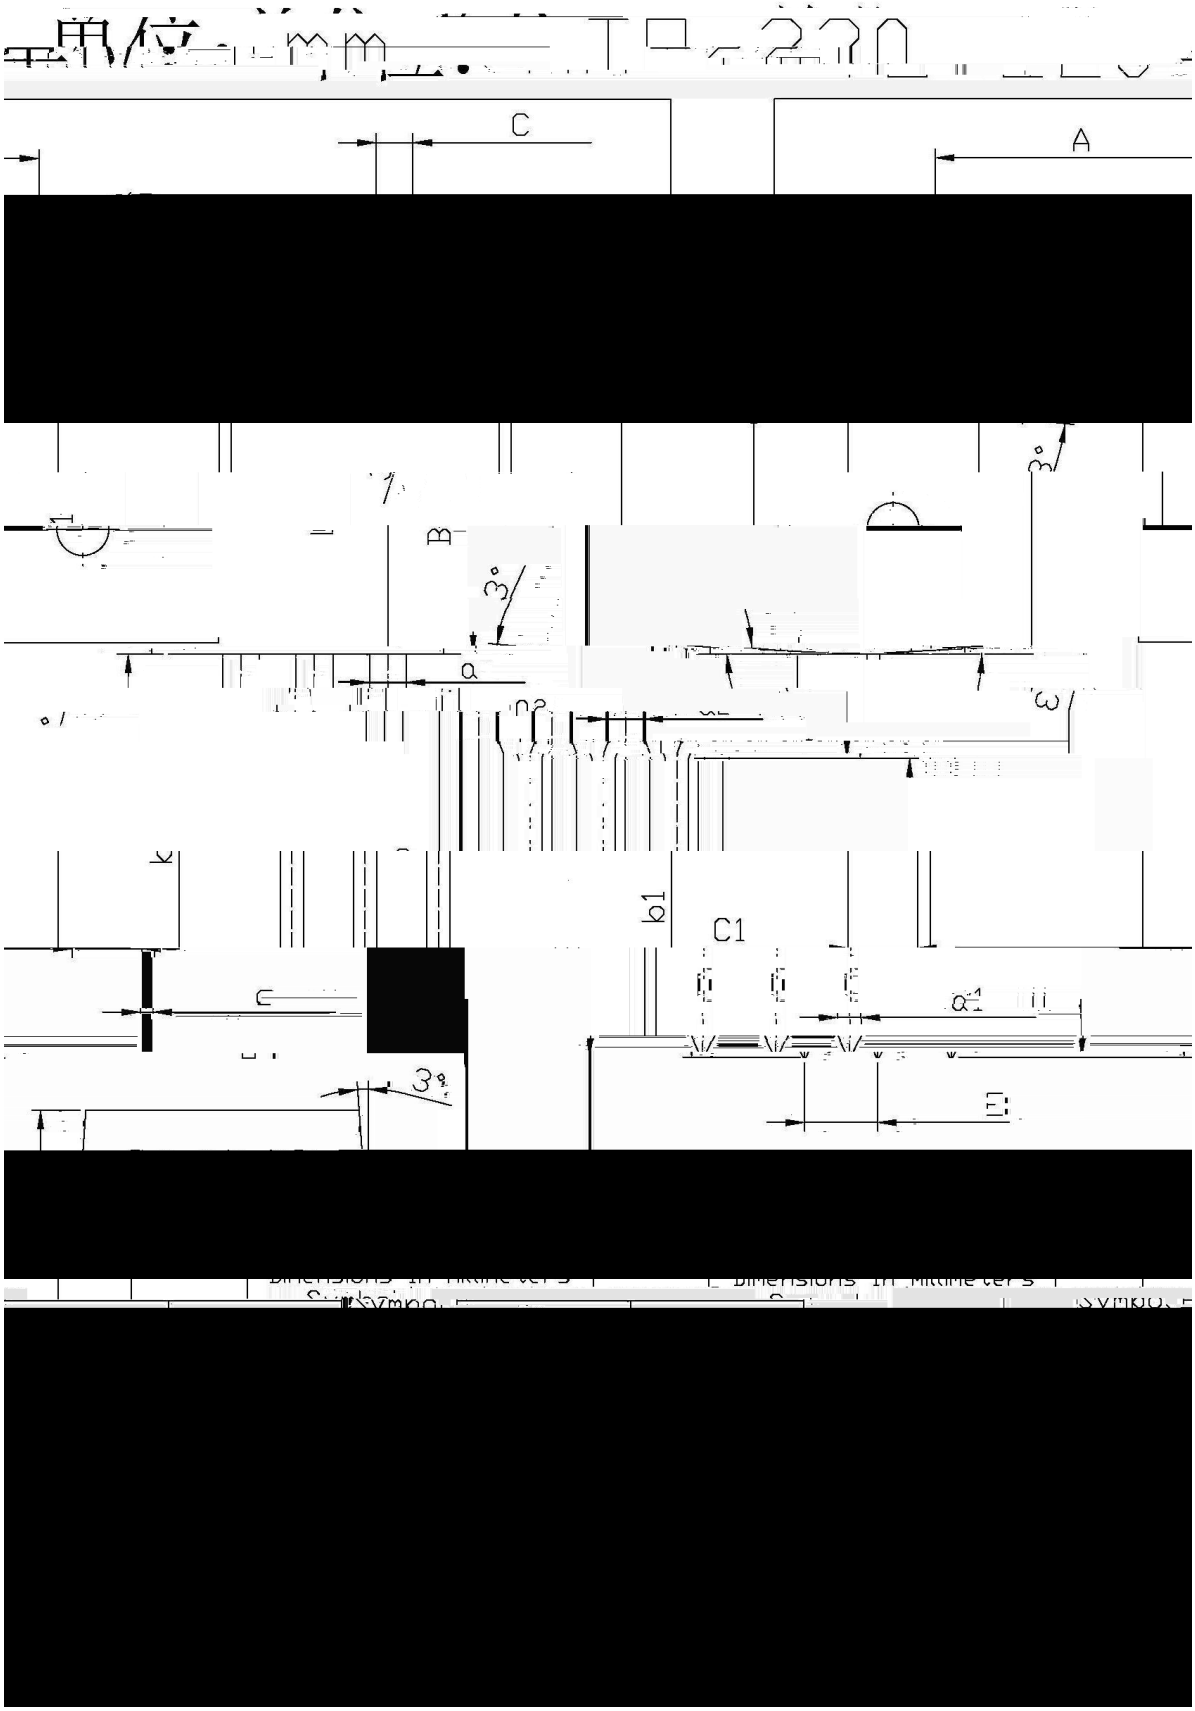

/ Marking Instructions

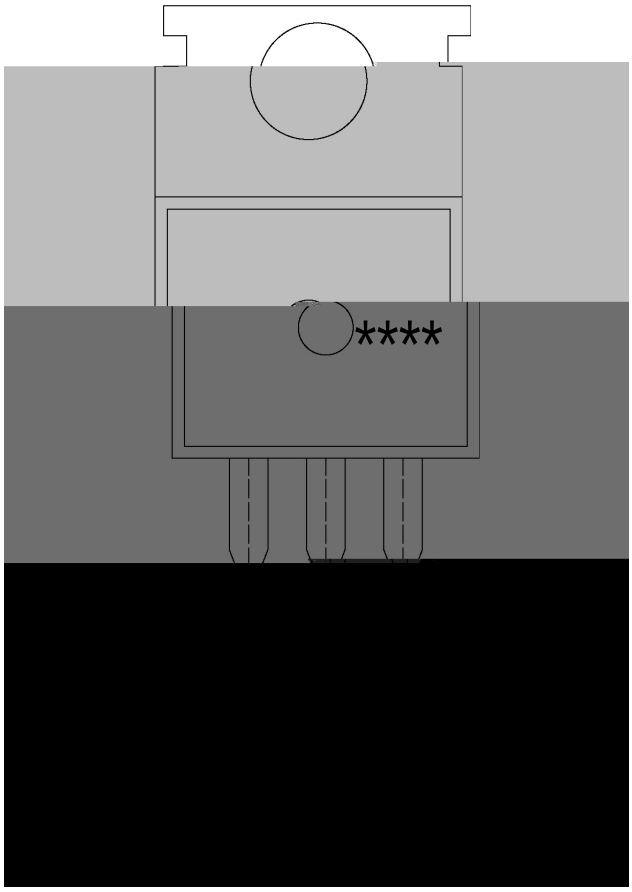


BR

MBR1060

CT:

****

( ) / Temperature Profile for Dip Soldering(Pb-Free)

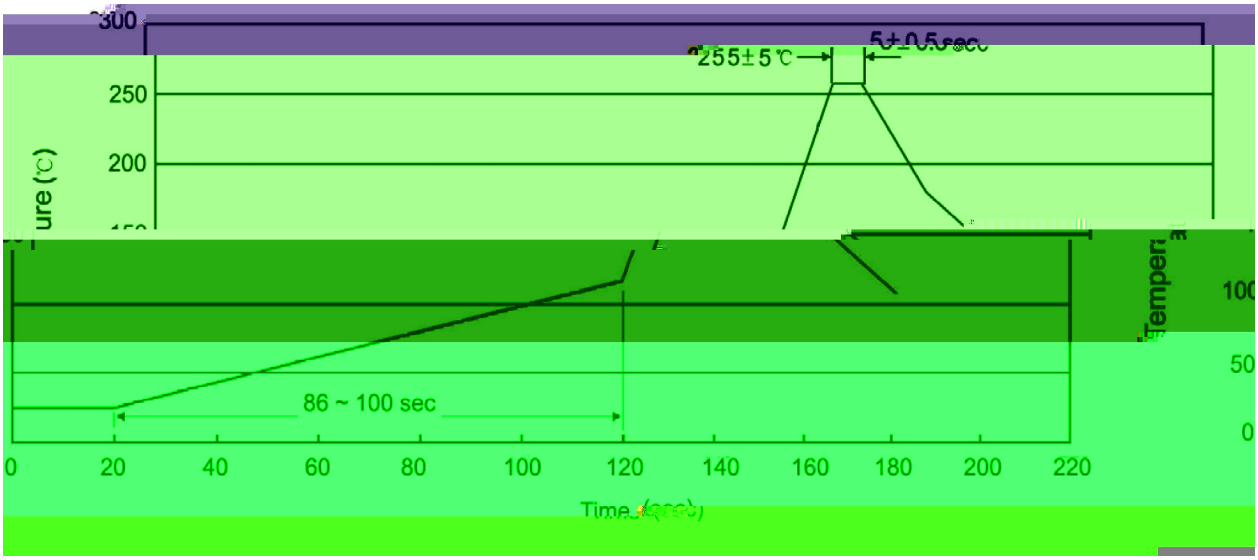

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000			