"Yـ

SOT-23 NPN Silicon NPN transistor in a SOT-23 Plastic Package.

◕ È


M MBTA56

Complementary to MMBTA56.

٧ ِ

Ideal for medium power amplification and switching.

ภ ً ٖ ≠ ٤



ã ﻨ ٗ




PIN1 Base PIN 2 Emitter PIN 3 Collector


ł. ʜ ڸ

h_{FE} Range	100 300
Marking	HK1G


≠ ∃ ÃÁ E ∀ ∫

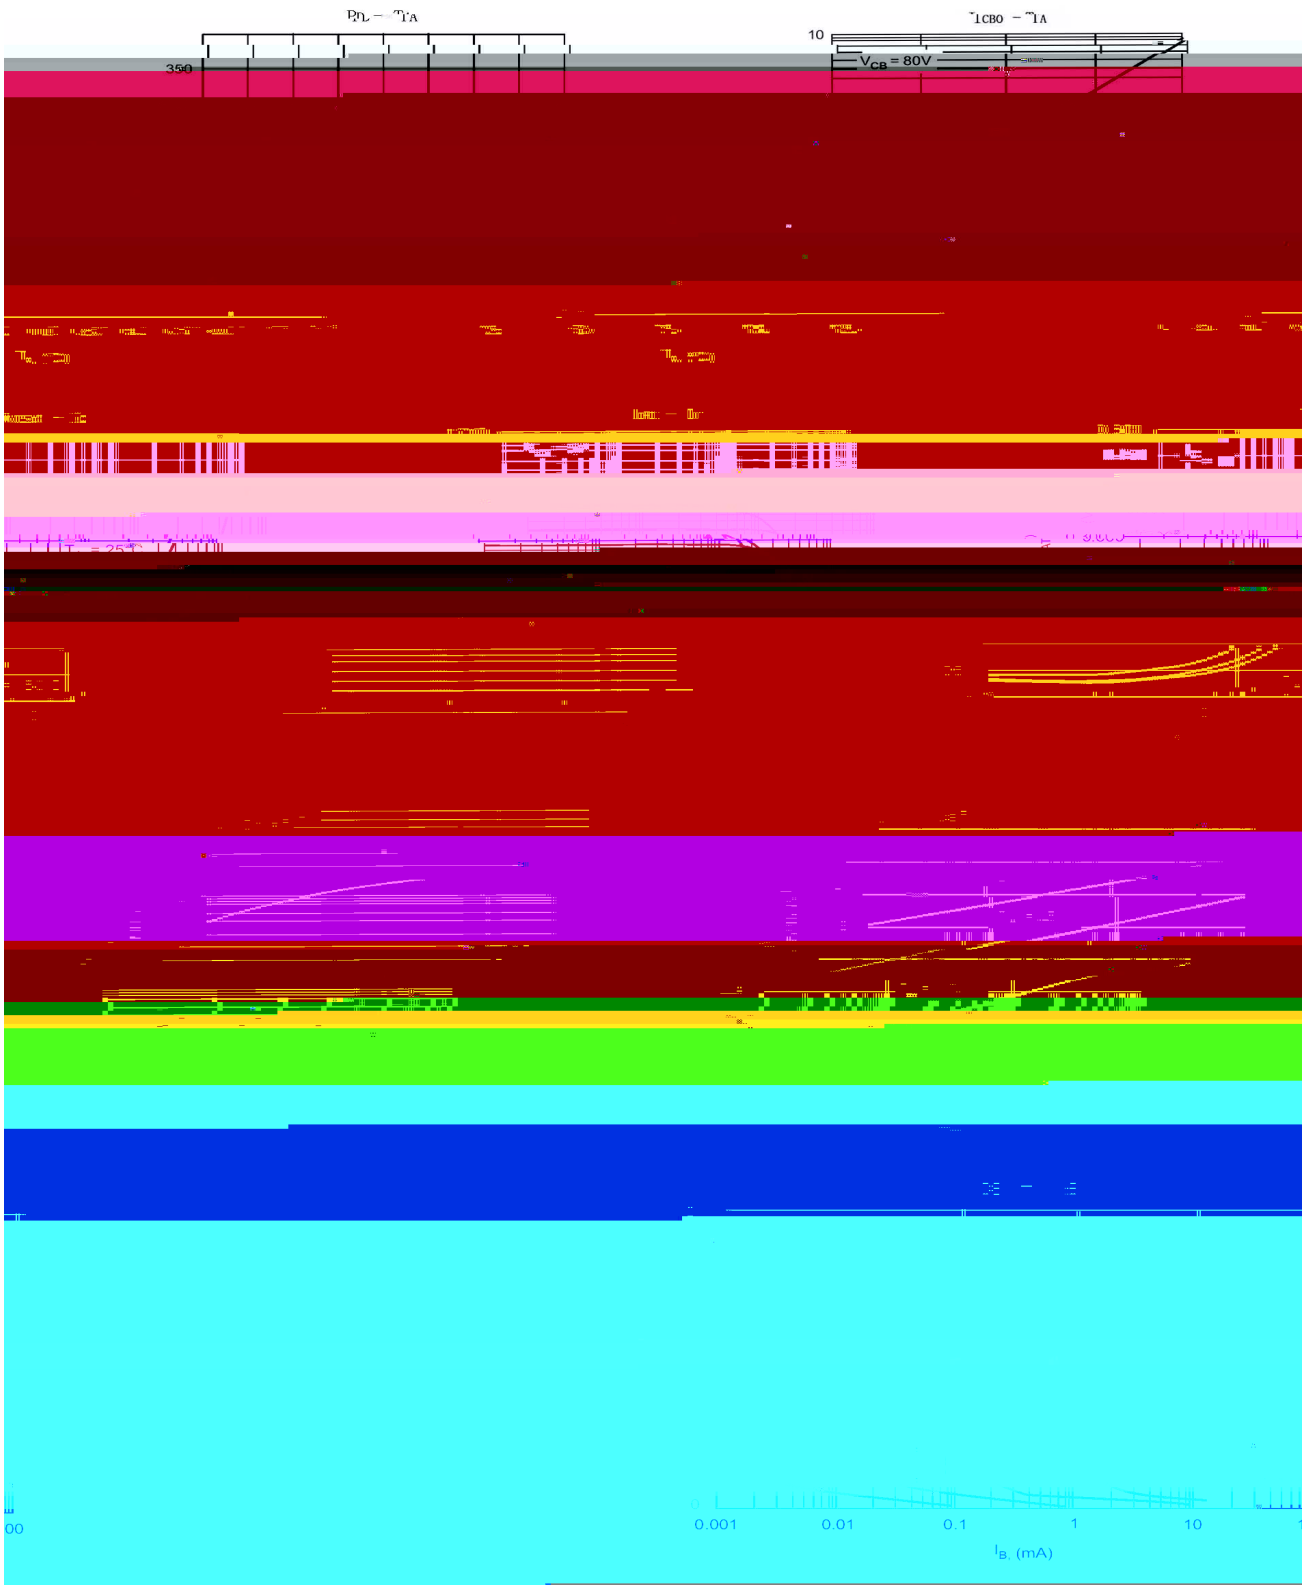

ᵘ ĖÒĻ ƒ

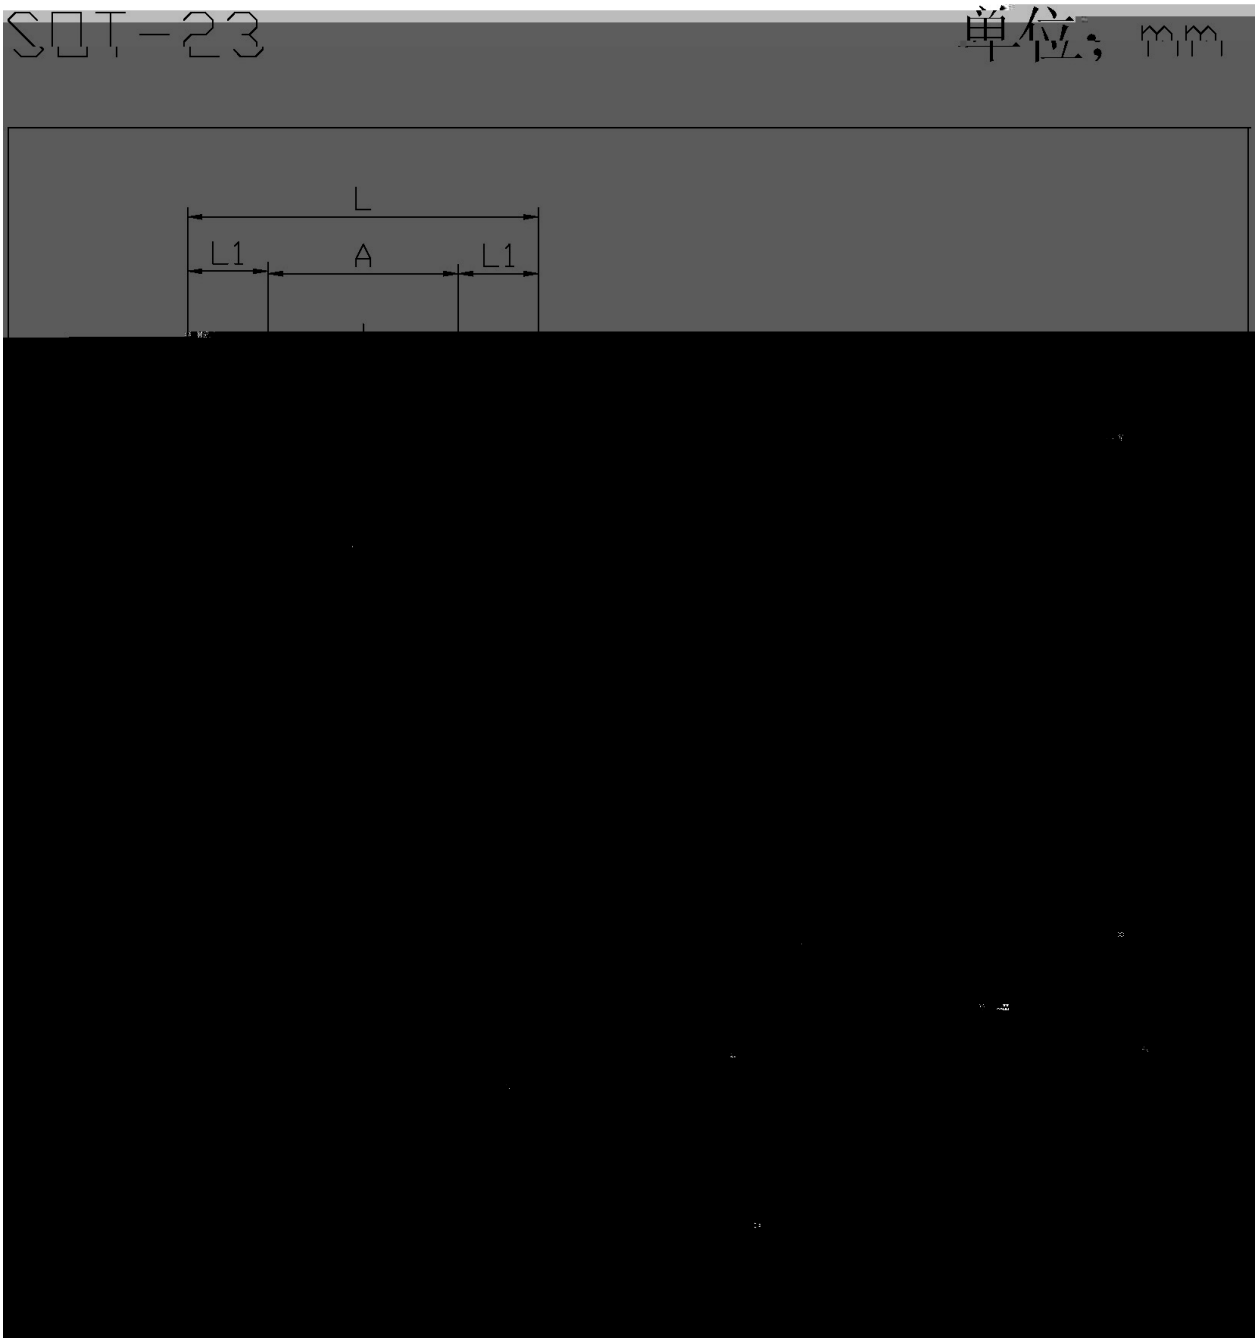

ł. Ļ Ω

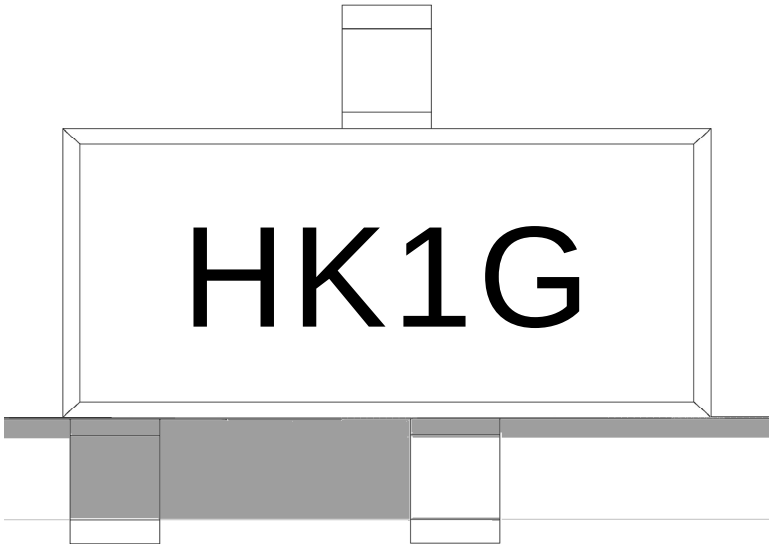

H


K1G

Note:

H: Company Code.

K1G: Product Type Code.

Wh p shudwxuh Suriloh iru LU Uhior z Vroghulqj+Se0luhh,

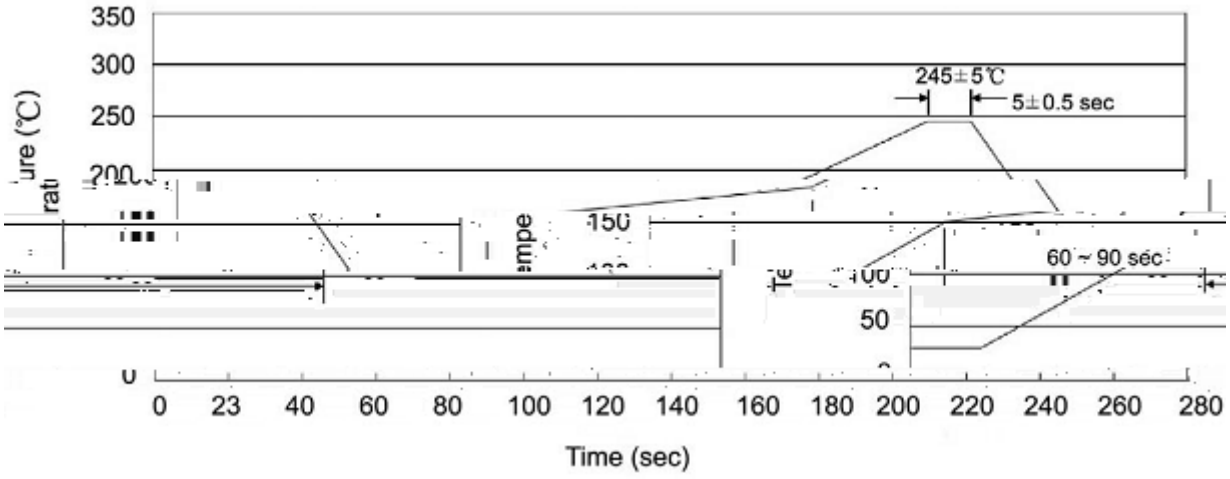

Note:

1 25 150 60 90sec;

1.Preheating:25~150 , Time:60~90sec.

2 245±5 5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.

3 2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260±5 10±1 sec. Temp:260±5 Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205