
/ Descriptions

TO-263

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

		×	
	θ		


ώ

/ Electrical Characteristic Curve


IF - TC

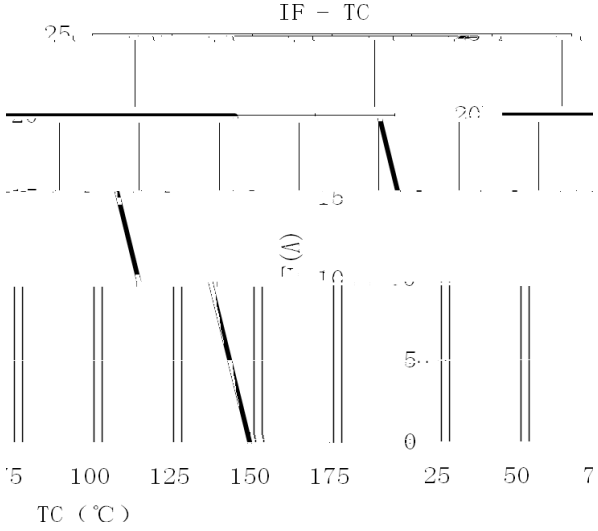


IFSM

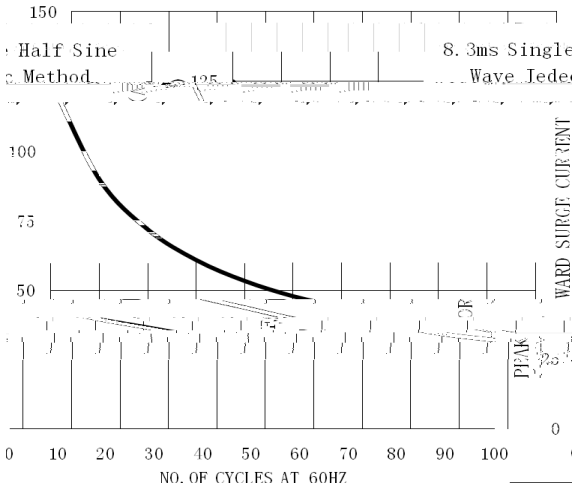


IF - VF

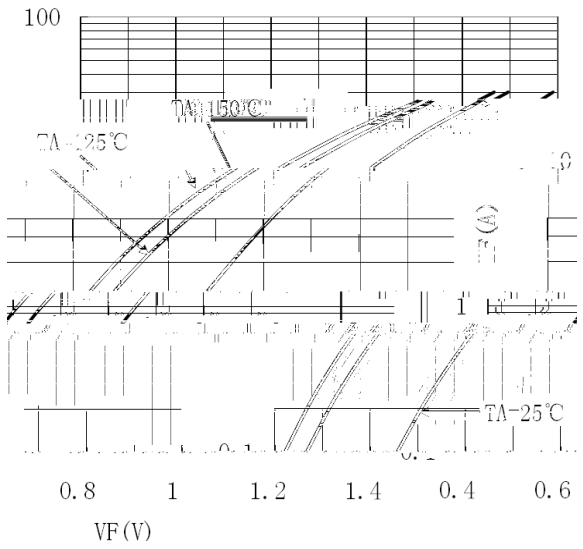

IR - VR

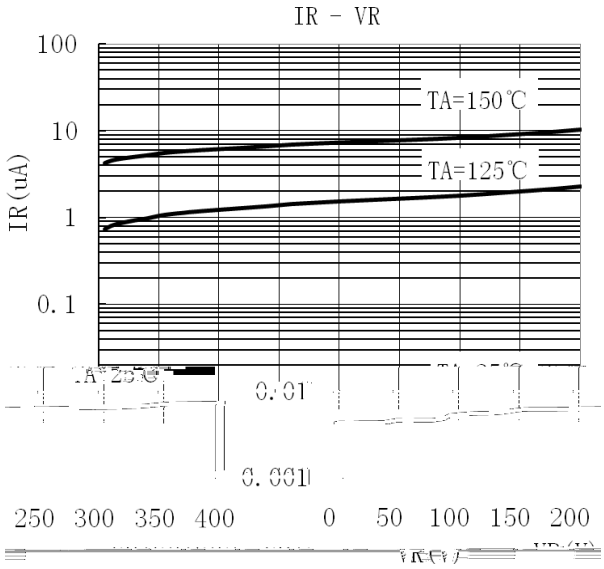


CJ - VR

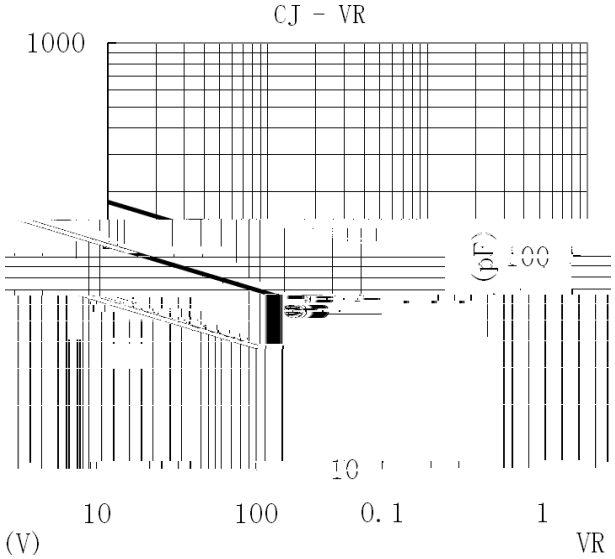

MUR2040BCT

/ Marking Instructions

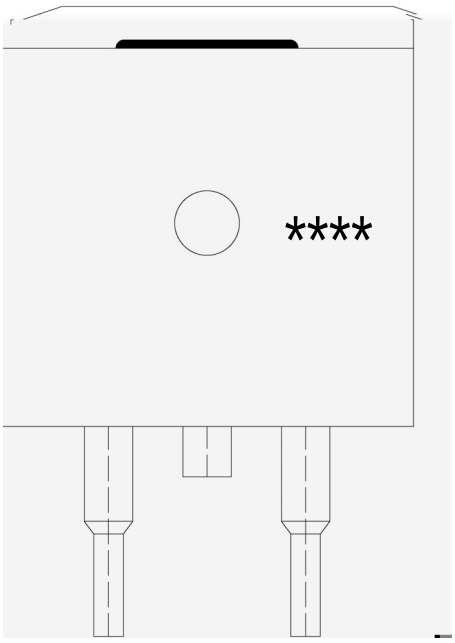

MUR2040


CT:

****

MUR2040

CT

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

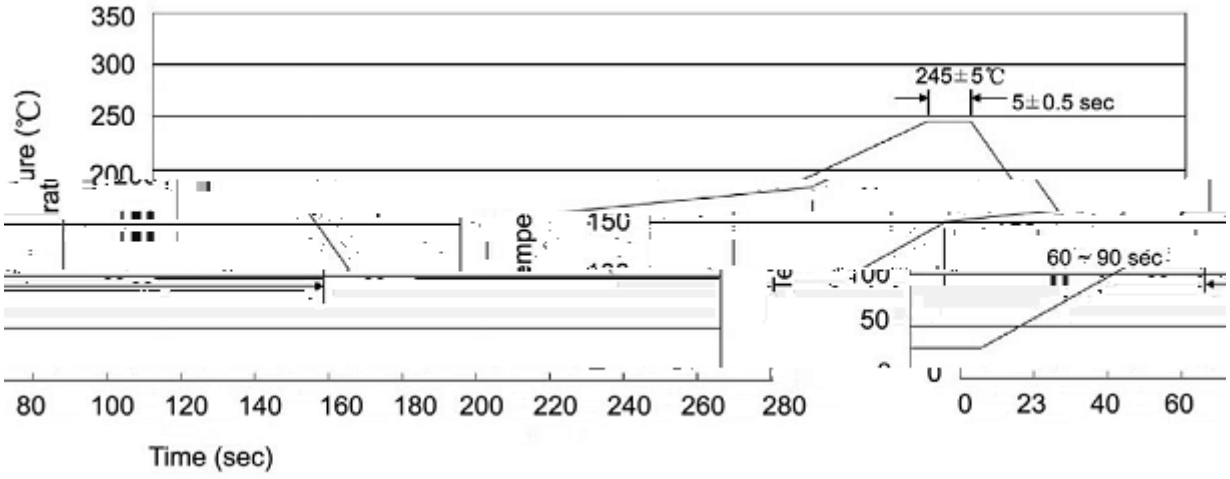

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-263	800	1	800	5	4,000	13 ×24	360×360×50	385×257×392

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-263	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

/ Notices