
/ Descriptions

TO-220F


/ Features




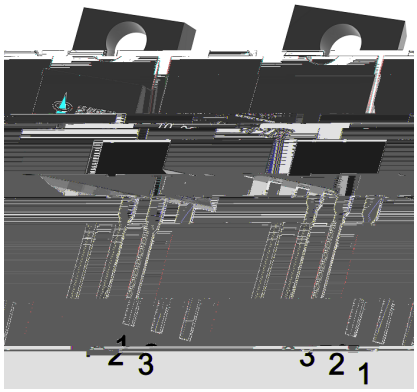


/ Marking

/ Electrical Characteristic Curve

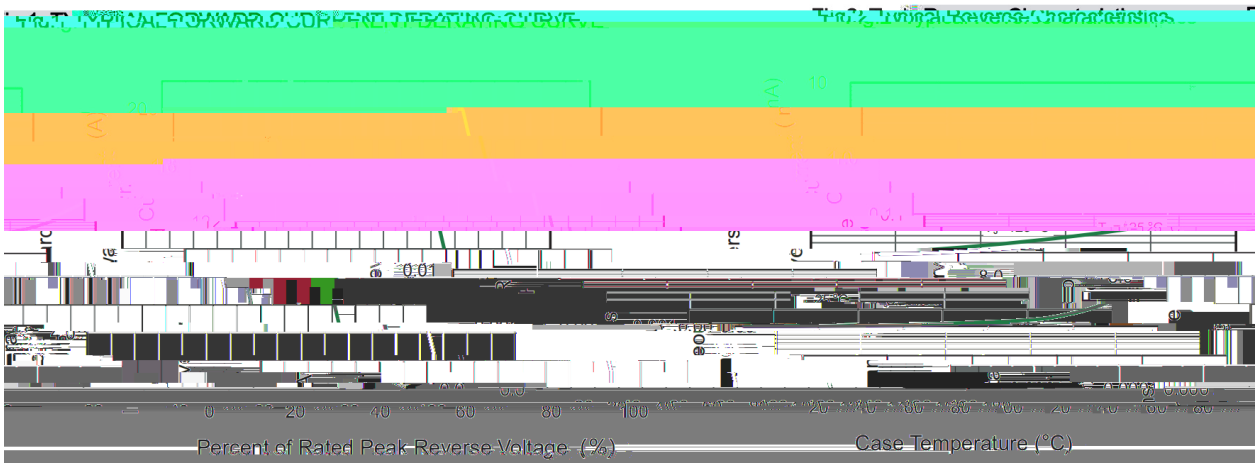


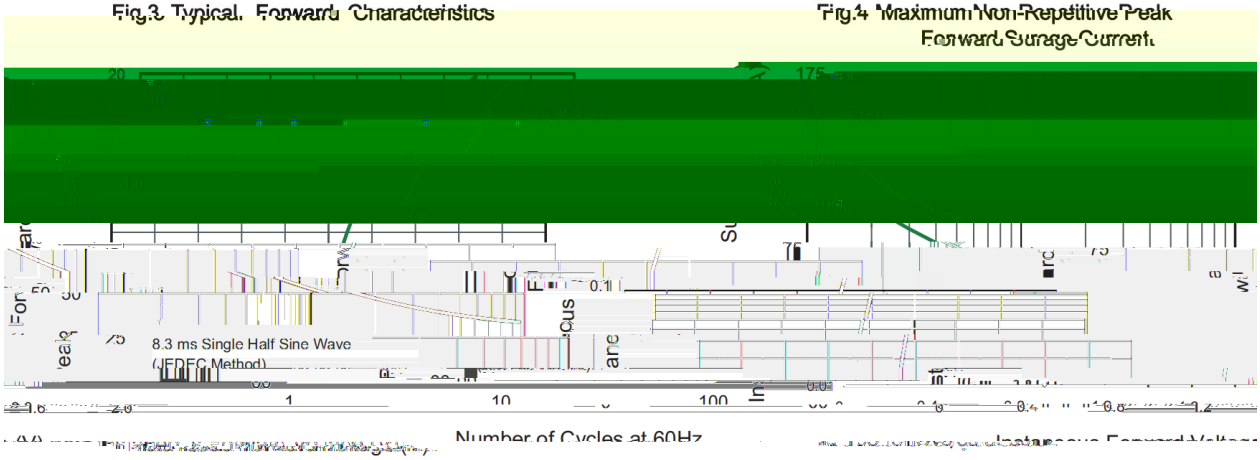

/ Package Dimensions

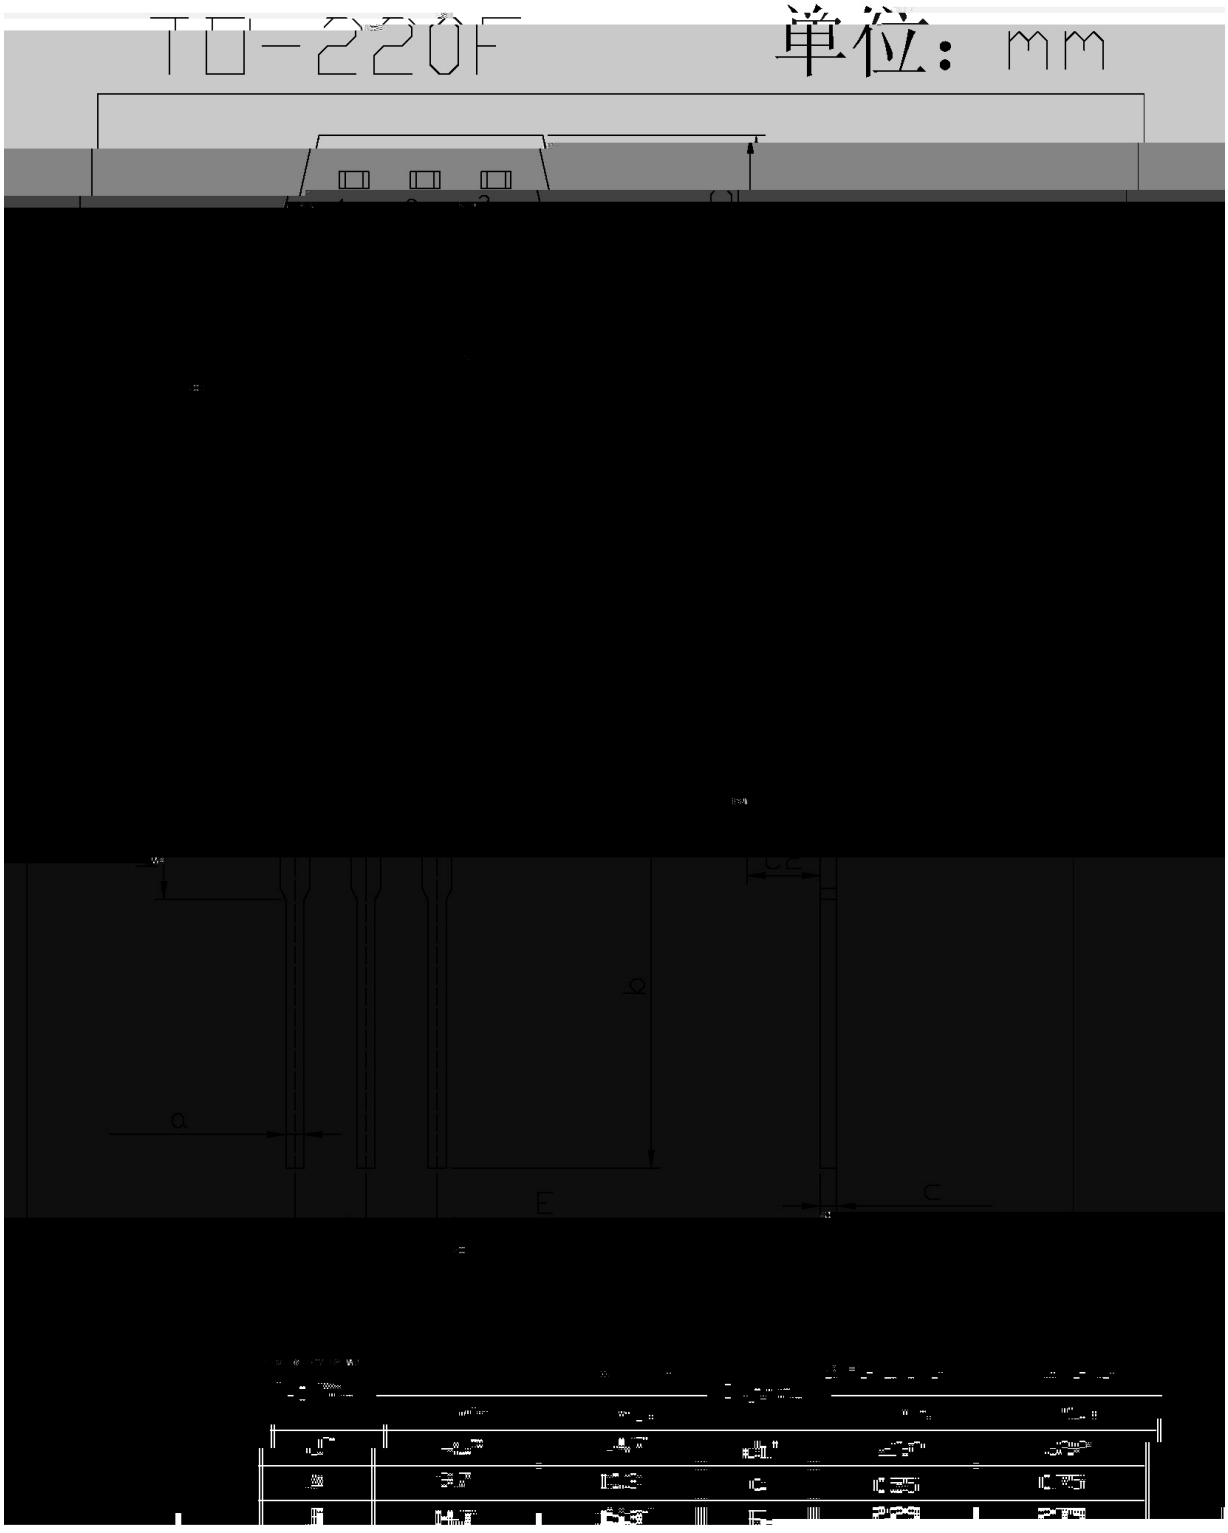

/ Marking Instructions

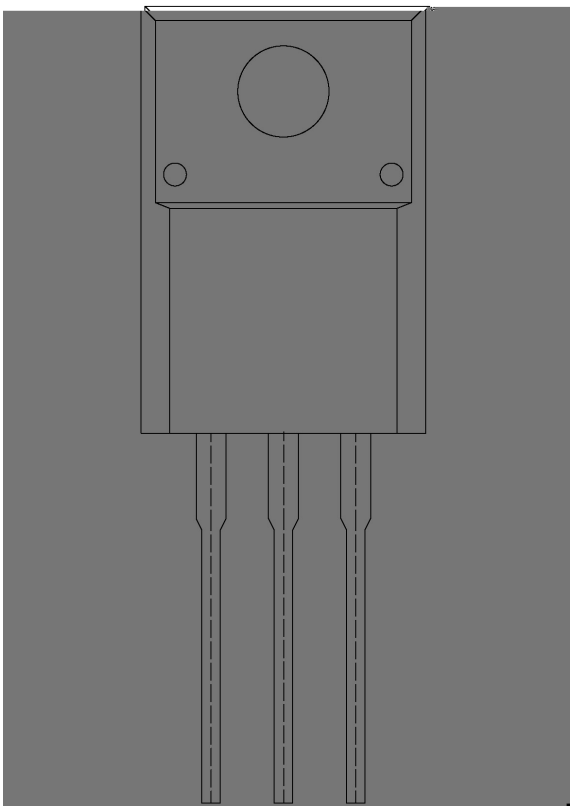


BR

MURF2060

CT:

****

G PD t … • Ž ¢ (x /) / Temperature Profile for Dip Soldering(Pb-Free)



ª ¢ y

1o• Ä ½ “ † 25 ½150 - k ž • 60 ½90sec;

2o• Q › “ † 255 r5 - k ž • 4 Ò 5 r0.5sec;

3o•D N ò i Ò 0 , † 2 ½10 - /sec.

Note:

1.Preheating:25~150 - , Time:60~90sec.

2.Peak Temp.:255 r5 - , Duration:5 r0.5sec.

3. Cooling Speed: 2~10 - /sec.