

TO-3P NPN Silicon NPN transistor in a TO-3P Plastic Package.

100W NJW0302GC

Recommend for 100W high fidelity audio frequency amplifier output stage, Complementary to NJW0302GC.

Power amplifier applications.




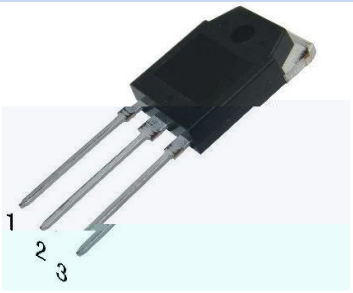



PIN1 Base PIN 2 Collector PIN 3 Emitter

See Marking Instructions.


Rev.A Nov.-2018

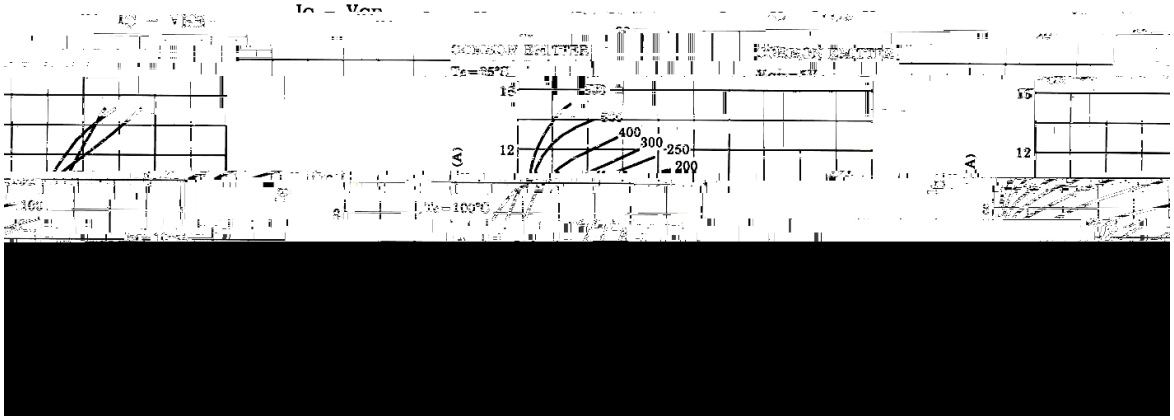

400
300
250
200
(A)
(A)

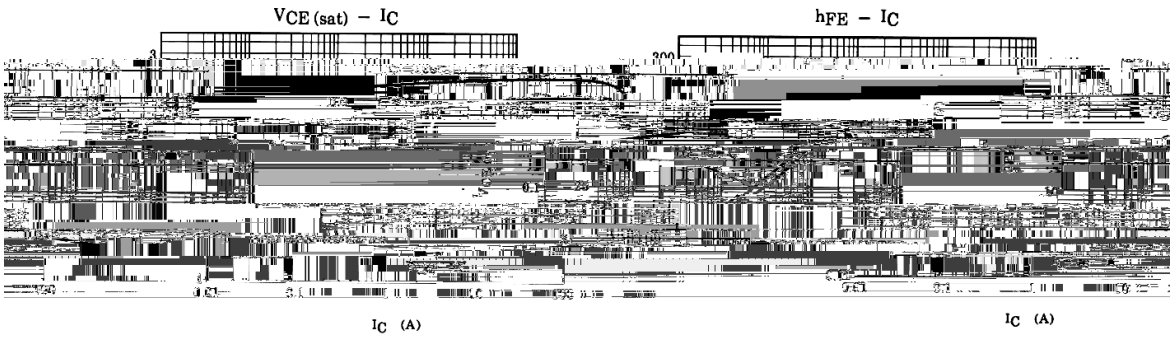

VCE (sat) – IC
hFE – IC
IC (A)
IC (A)

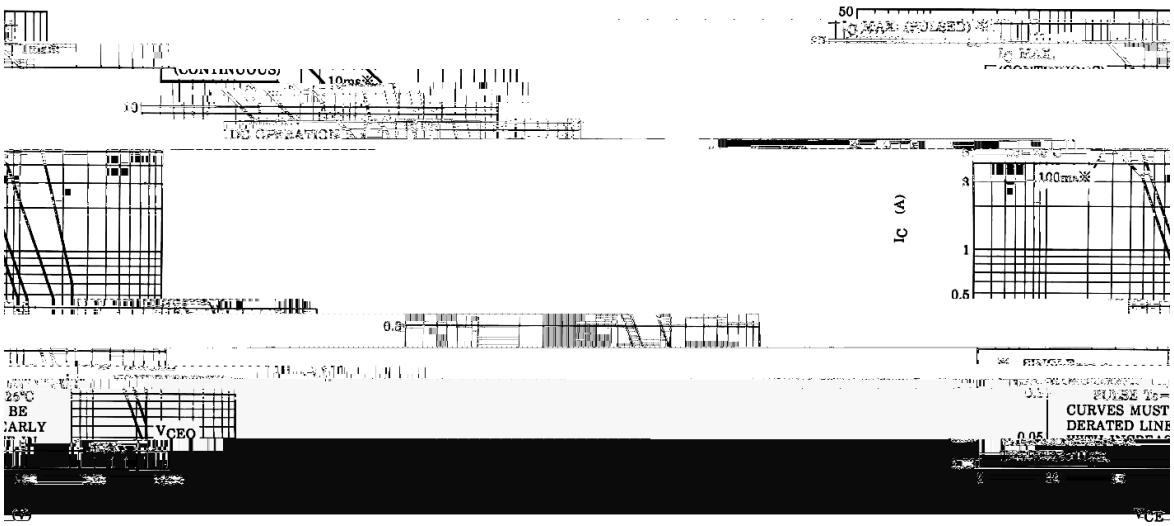
50
IC (A)
3
1
0.5
0.3
VCEO
CURVES MUST
DERATED LINE

TO-3P 单位：mm

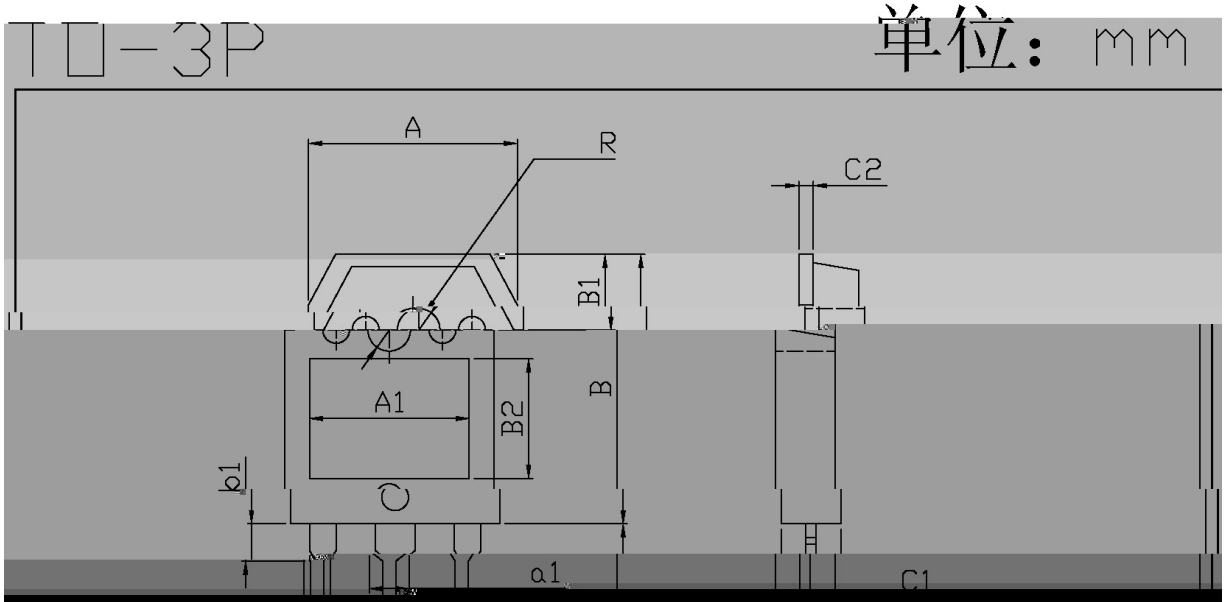

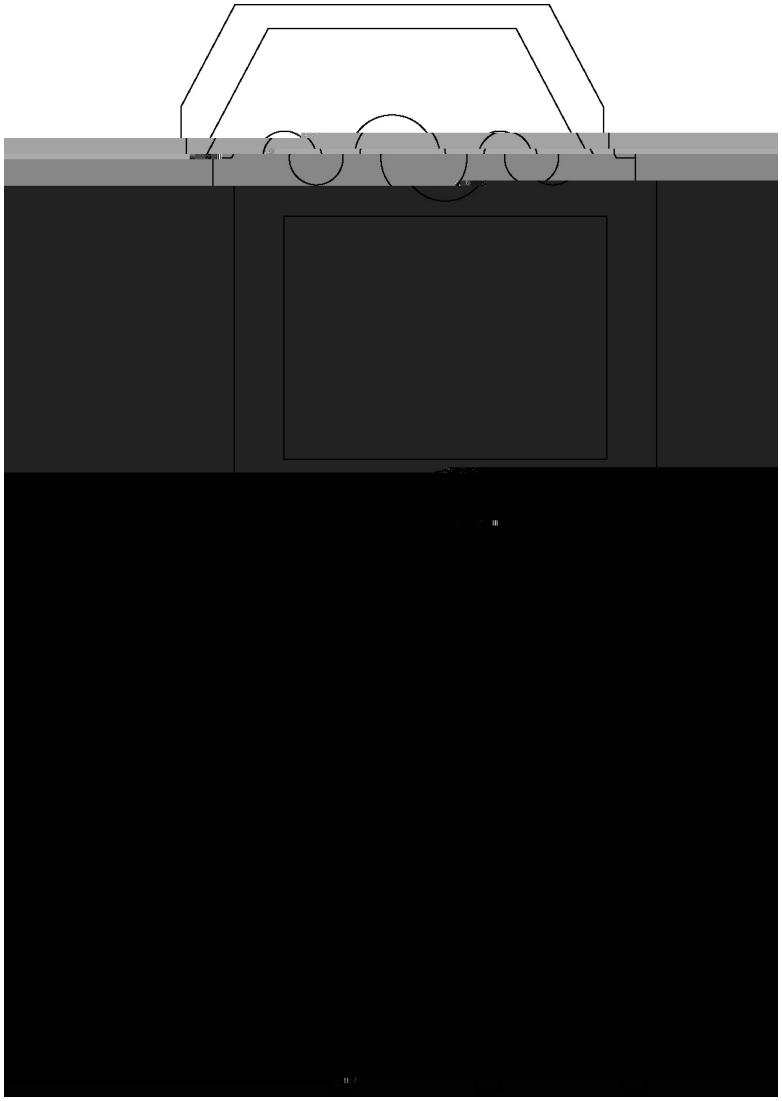

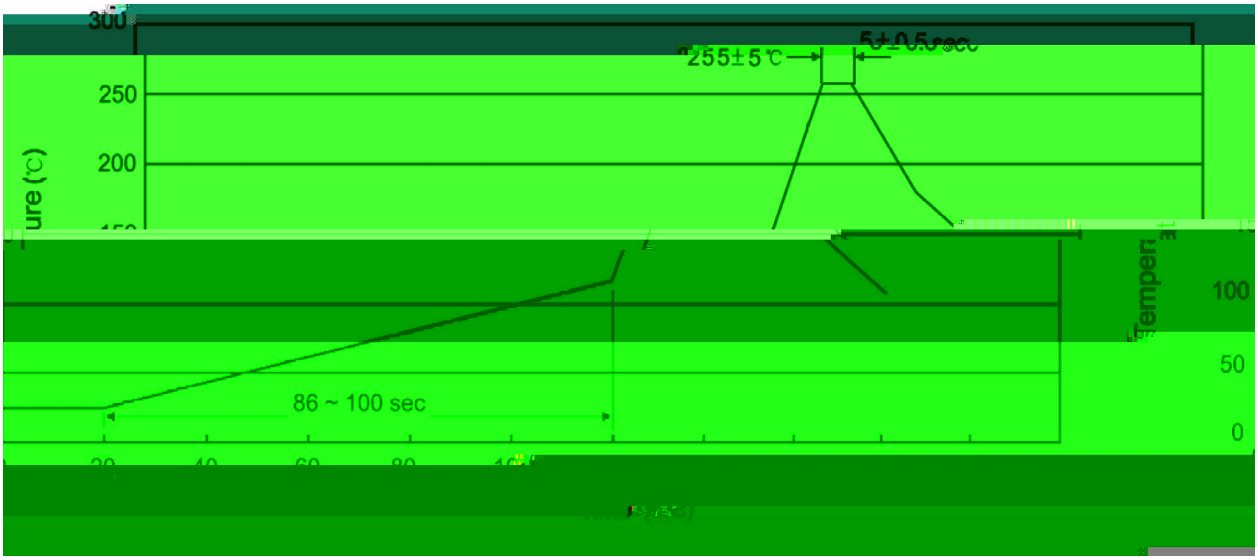

						Note:
1		25	150		60	90sec;
2		255±5				5±0.5sec;
3				2	10	/sec.

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

270±5 `ÇwA÷B•Đ V"!B†'CB ® uW ‘9€ = O$ Đ l E%B"q .a• !t(bv V4• ĐÀ'w…)ER&A4ƒA!Žõvd G