S10AC

SHEET

A	2021-5-31			

A2- n t ضذ

50V~1000V 10A SMC

RoHS 2011/65/EU


	（ ）								
									℃
									℃

			数值							


0 8 9 = > ? / Electrical Characteristic Curve

Fig.1 Forward Current Derating Curve


Fig.2 Typical Reverse Characteristics

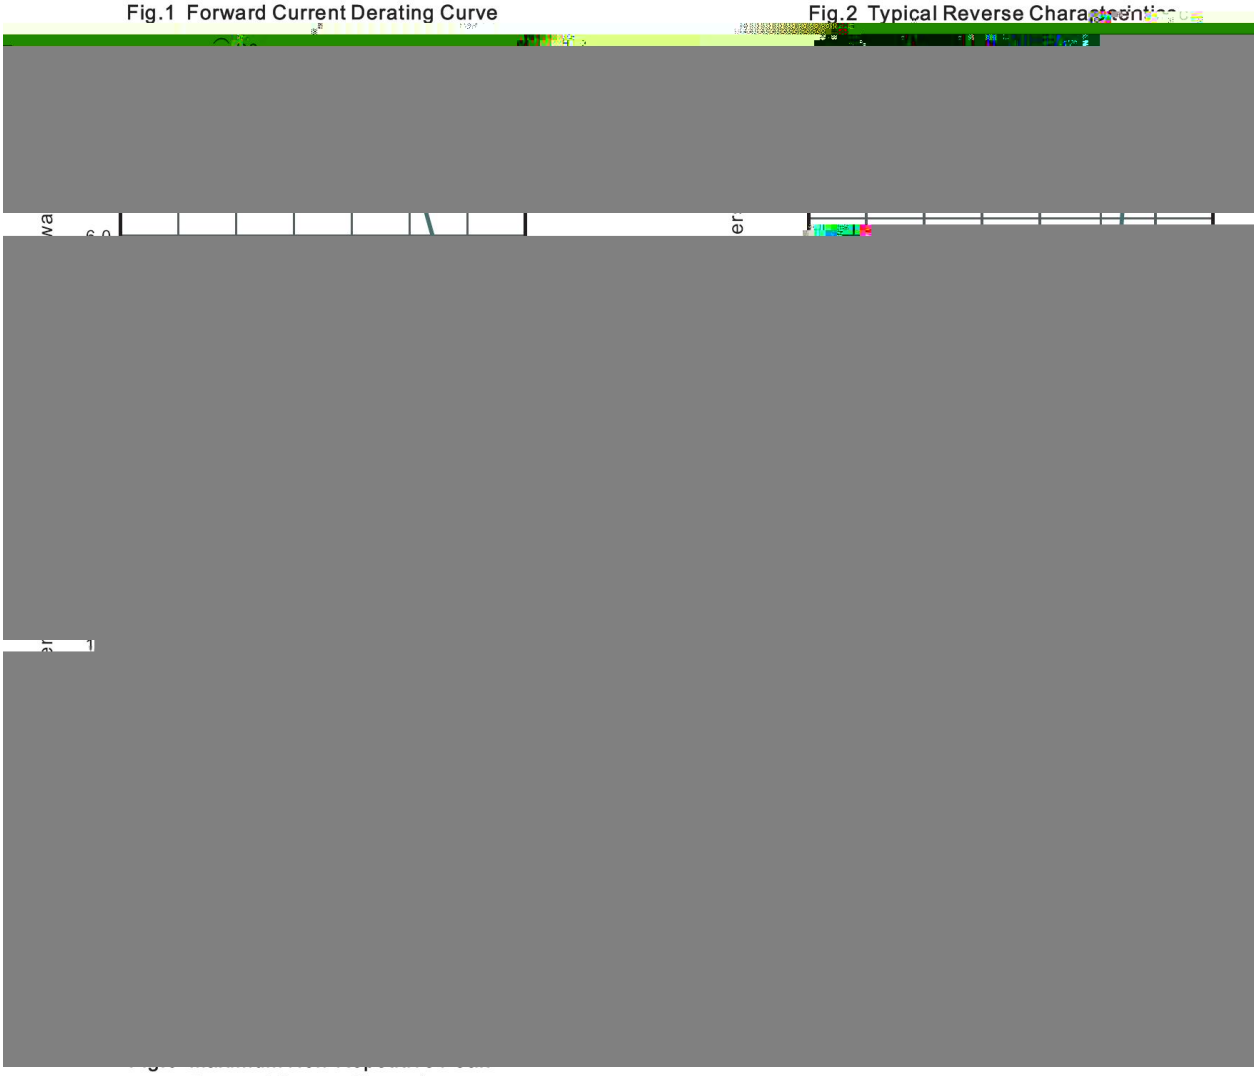

Forward Surage Current

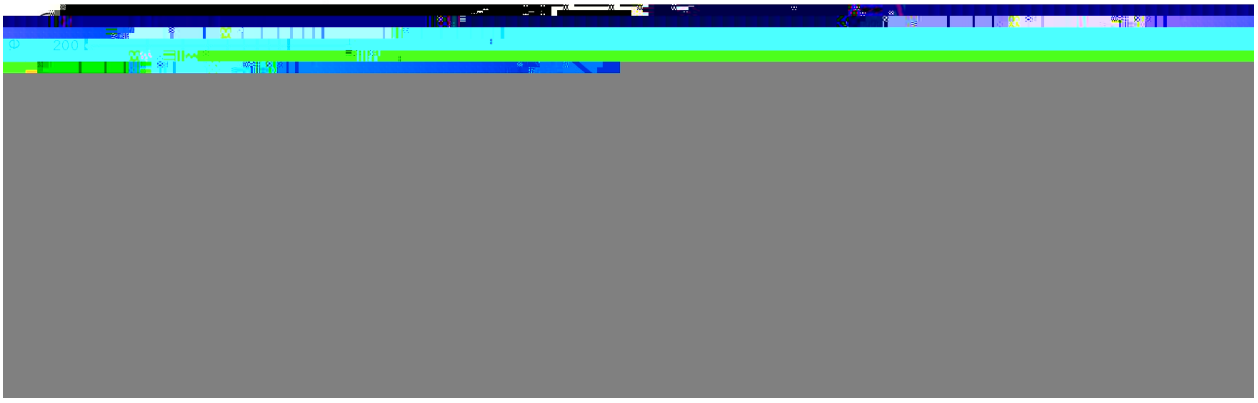

H I J K L = > ? (M N) / OPQRPSTUVSPGWSXYZ[PGYXSG\]G]PY[X^G_X[`PSZabcWdefSPPg

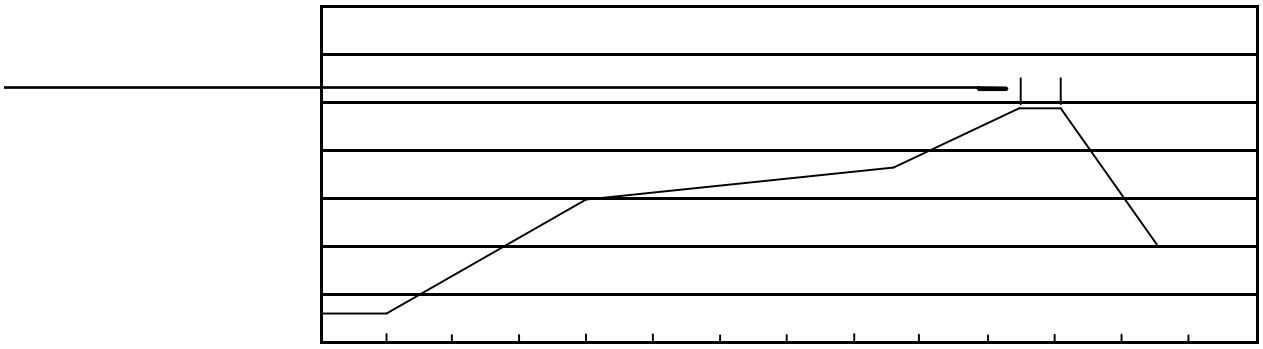

℃

± ± ± ℃ ±

℃ ℃

h J i j k l m n / Resistance to Soldering Heat Test Conditions

± ℃ ± ± ℃ ±

o p q r / Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box 盒	Outer Box 箱
						″		

s * D E / Notices