
Parameter	Symbol	Rating							Unit
		S2AW	S2BW	S2DW	S2GW	S2JW	S2KW	S2MW	
Maximum Repetitive Peakm4velrseW Voltag el( )TJ7131.2 0.2467 TD0 Tc0 TwV									


Maximum MS voltage( )TJ71314 - 0.1467 TD0 Tc0 TwV

/ Electrical Characteristic Curve

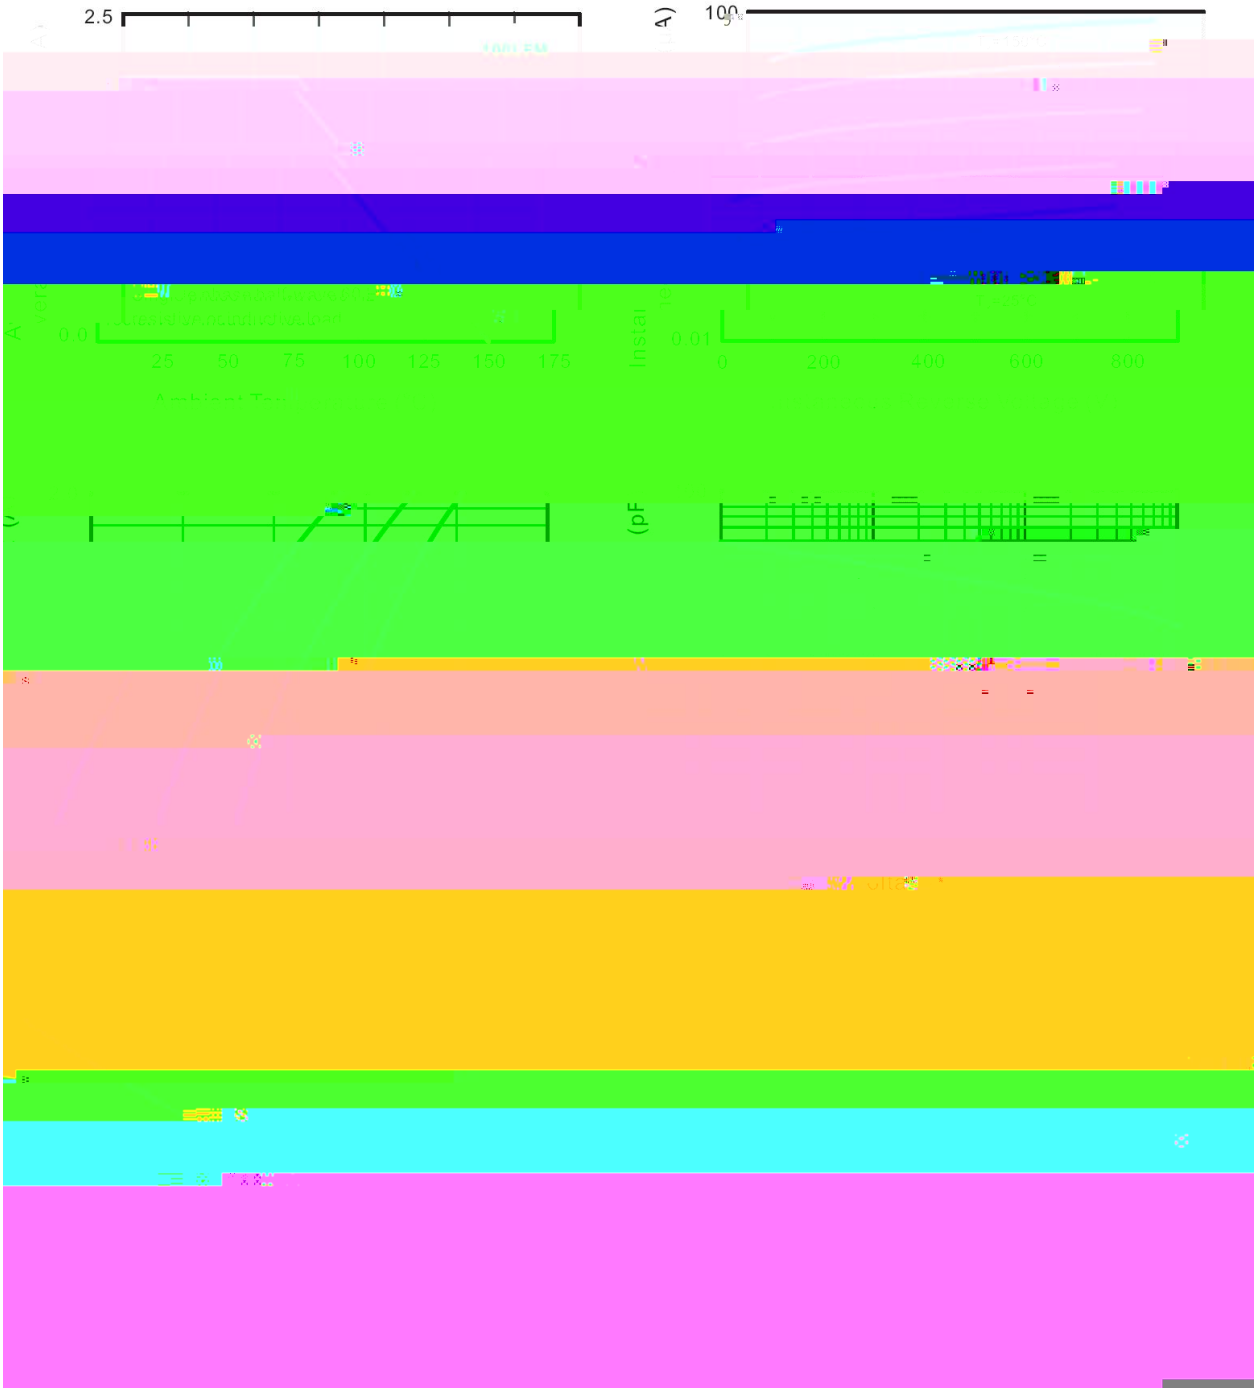


/ Package Dimensions

SOD-123FL

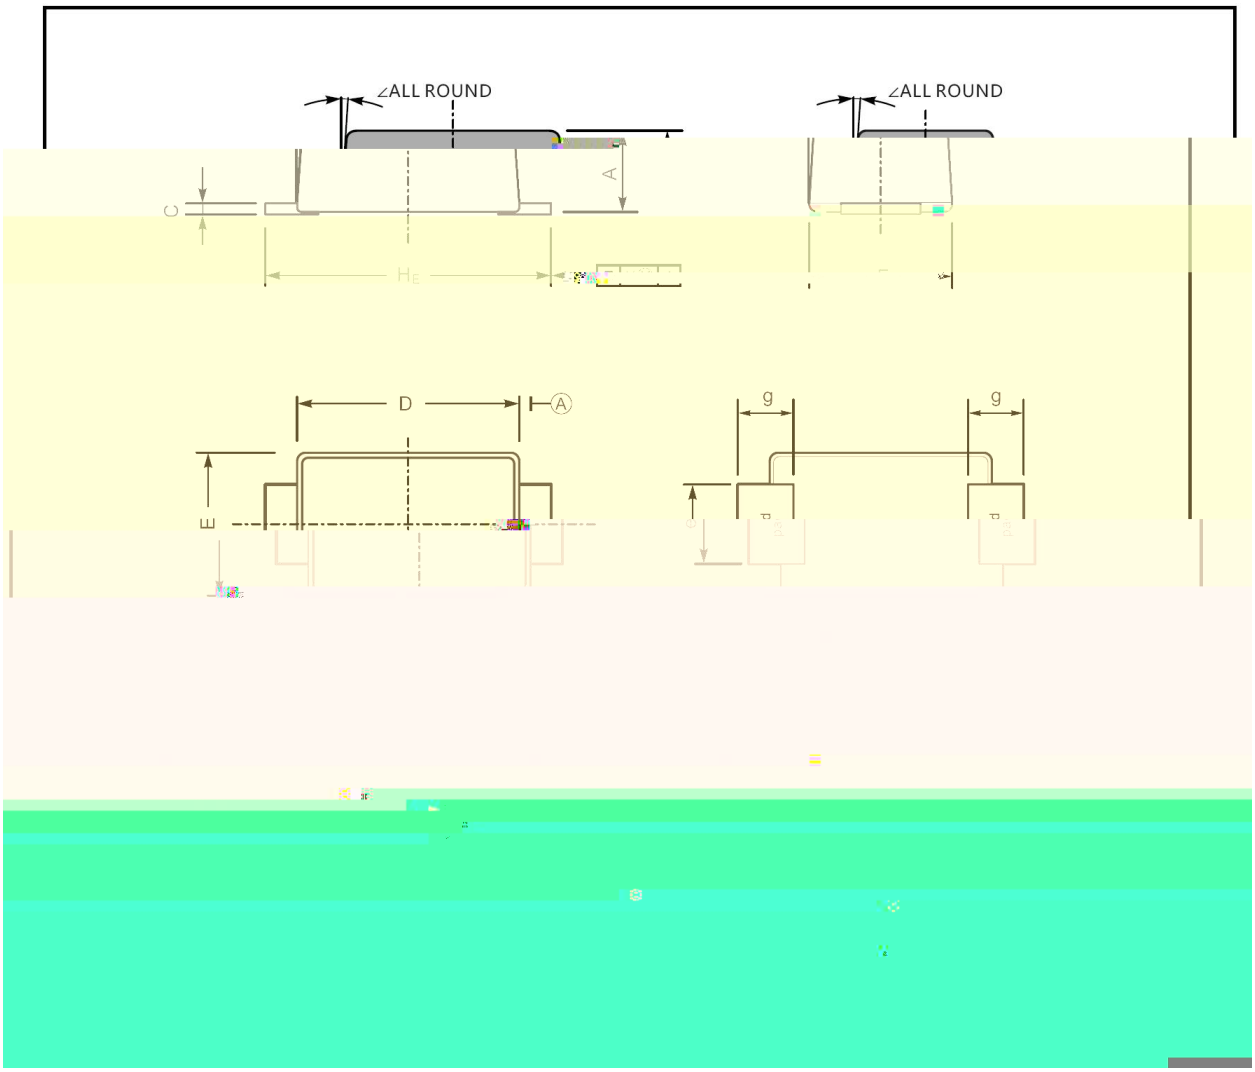


/ Marking Instructions

Marking

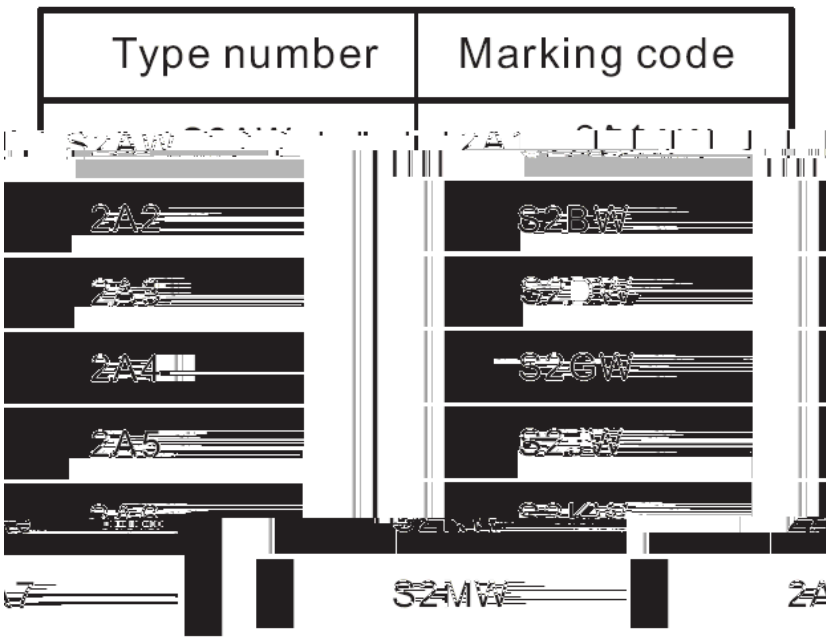

/ Marking Instructions

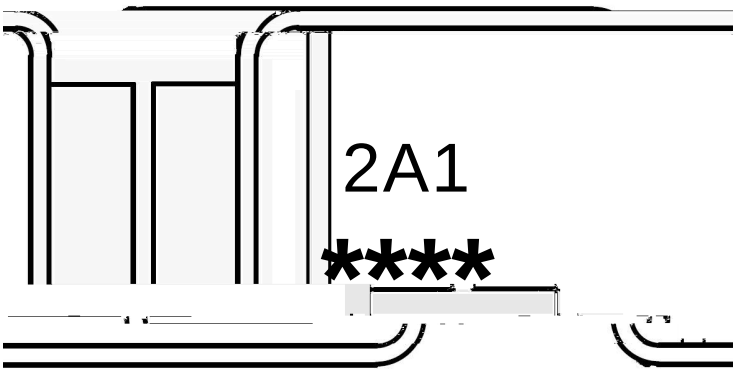

2A1


**** 1 * 3 *

Note:

2A1 Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

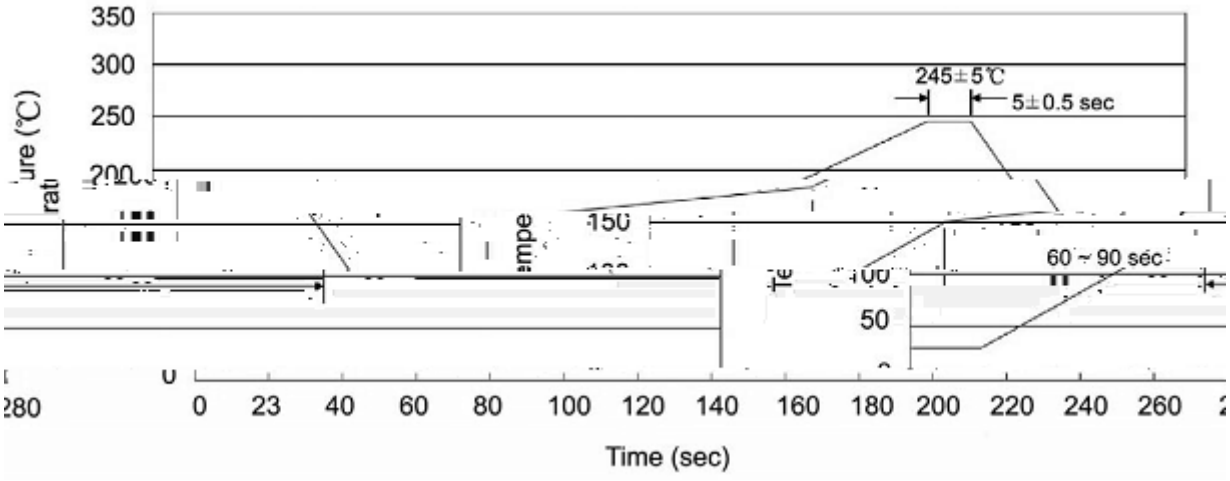

	Note:
1 25 150 60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2 245±5 5±0.5sec;	2.Peak Temp.:245±5 , Duration:5±0.5sec.
3 2 10 /sec.	3. Cooling Speed: 2~10 /sec.

2 ± 4 5