Surface Mount Schottky Barrier Rectifiers, Reverse Voltage 20 to 200V,Forward Current: 3.0A ,SMB package.

Glass Passivated Chip Junction, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. HF product.


General purpose.



SS32B~SS320B


Rev. B Dec.-2023

/ Electrical Characteristic Curve

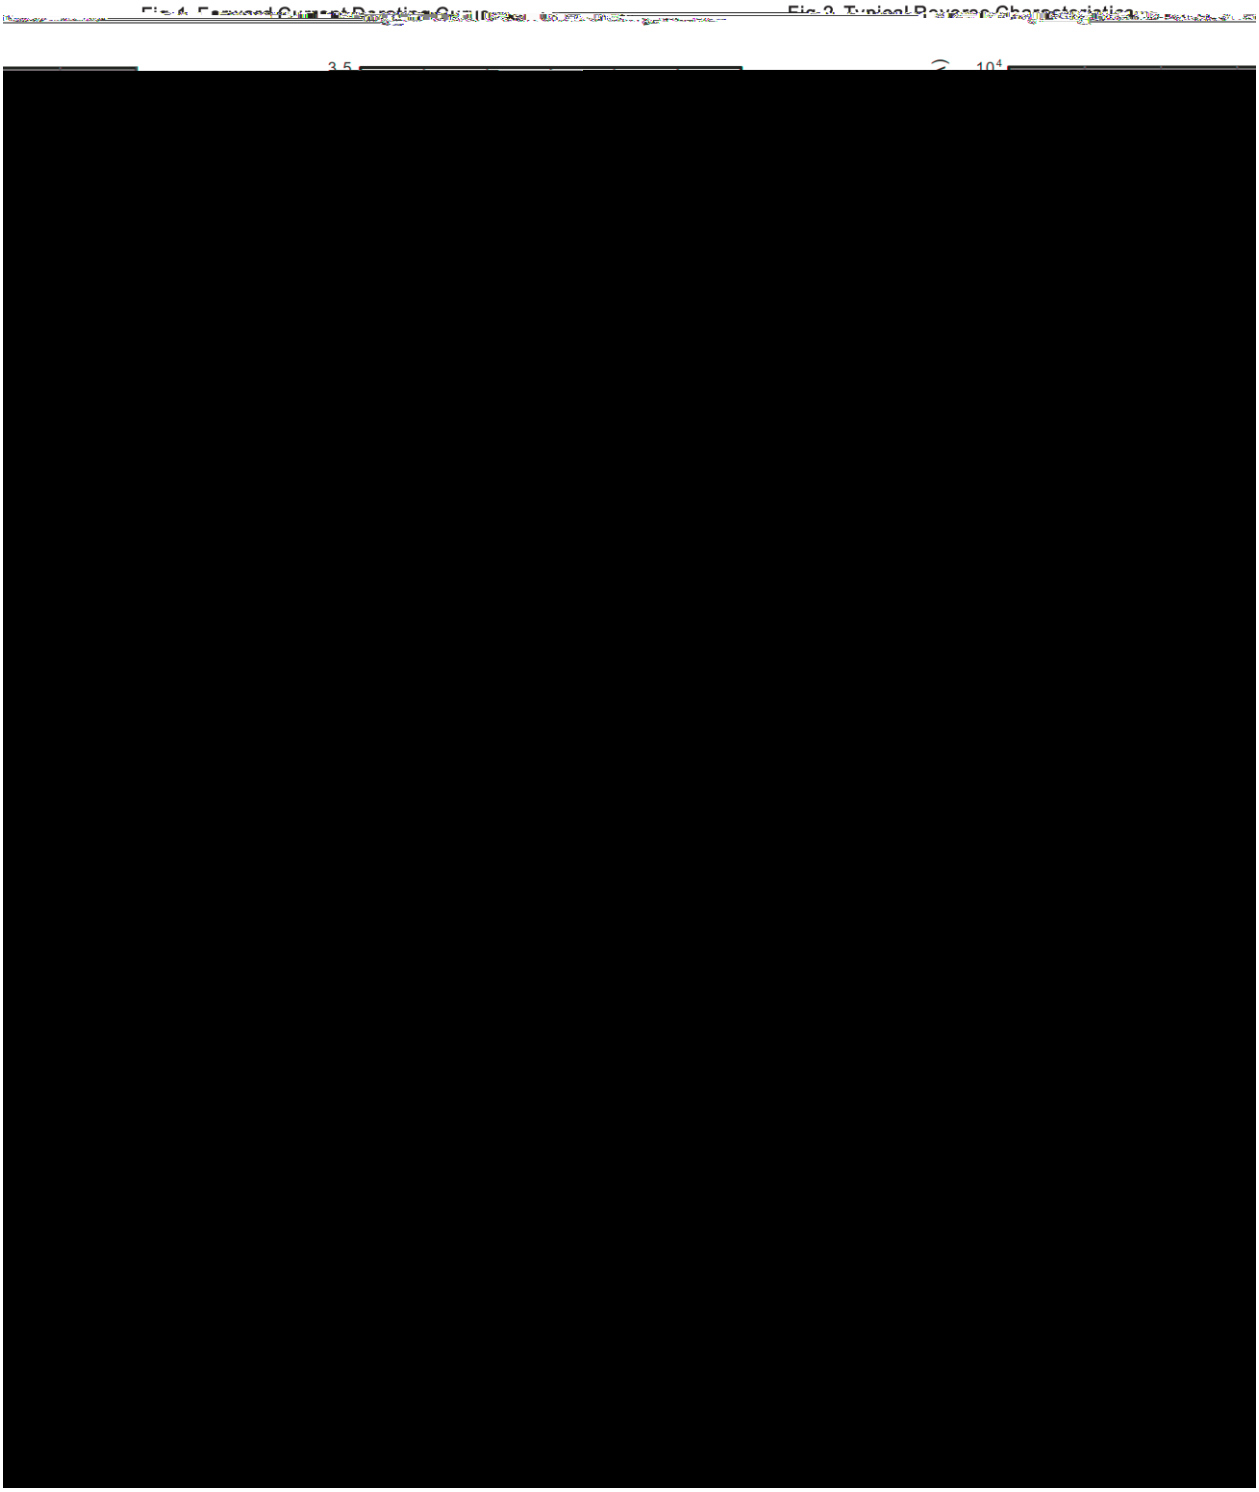

SS32B~SS3

/ Marking Instructions

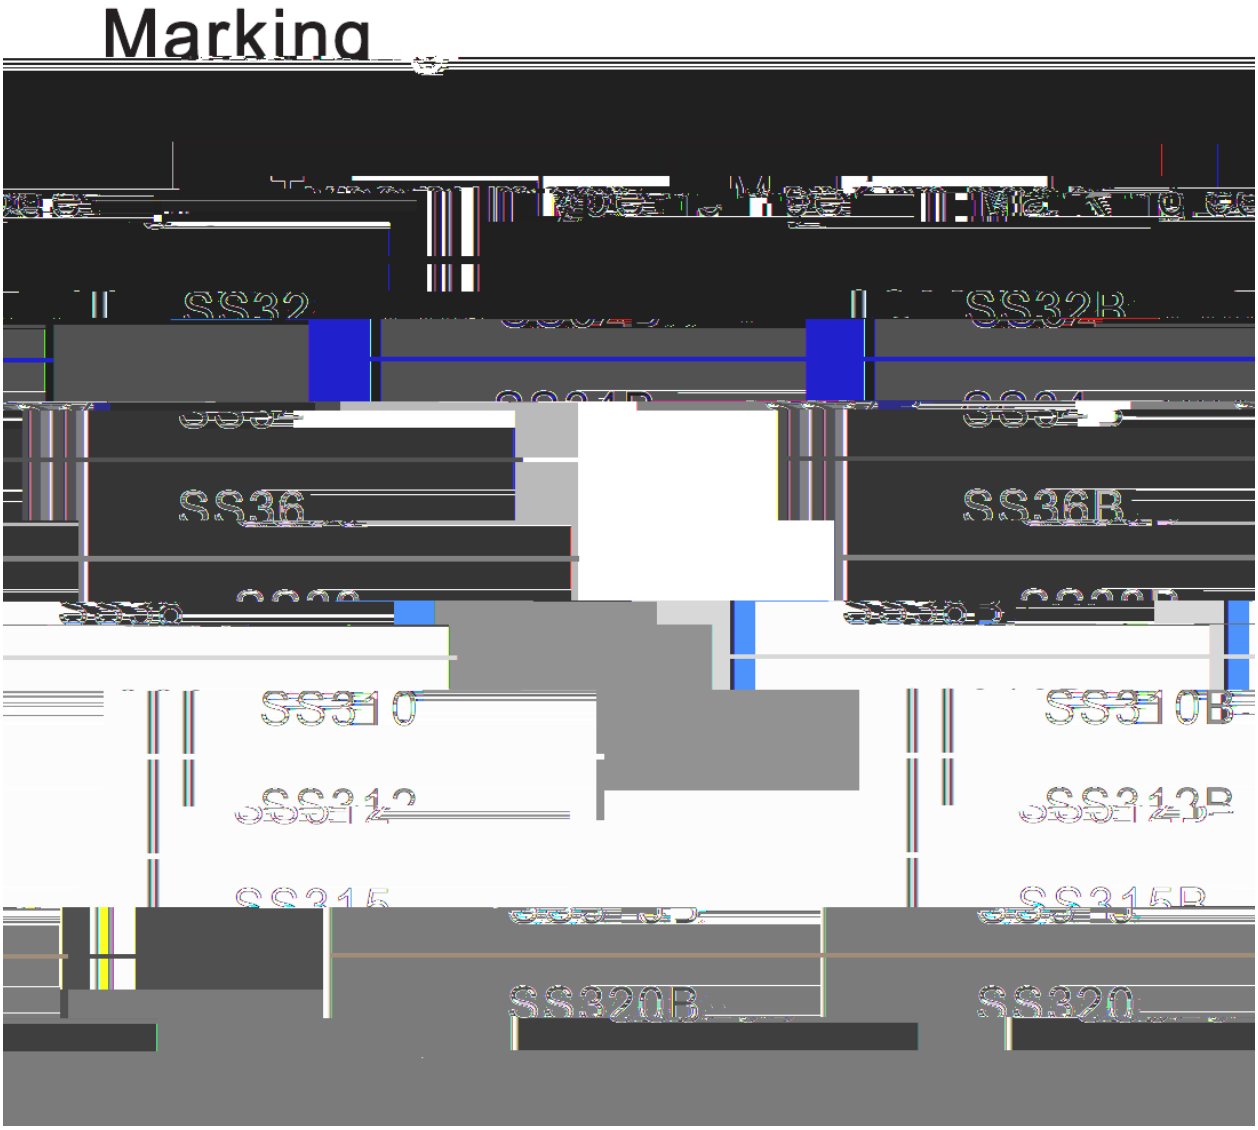

/ Marking Instructions



437 EM37JE **** *

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)



					Note:
1	25	150	60	90sec;	1.Preheating:25~150