
@ A B C D E ? F G H I J K L M N O P Q3R K S M N G P 2T31 K U V W X C Y
Surface Mount Schottky Barrier Rectifiers, Reverse Voltage P 60V,Forward Current: 2.0A ,SMB package.


Z [\ K] ^ _ K] S M ` a N G b c K d e @ A B C Y f g h i Y
Low power loss, High efficiency, High forward surge current capability, For surface mounted applications. HF product.

j k e l T
General purpose.




0 8 9 = > ?

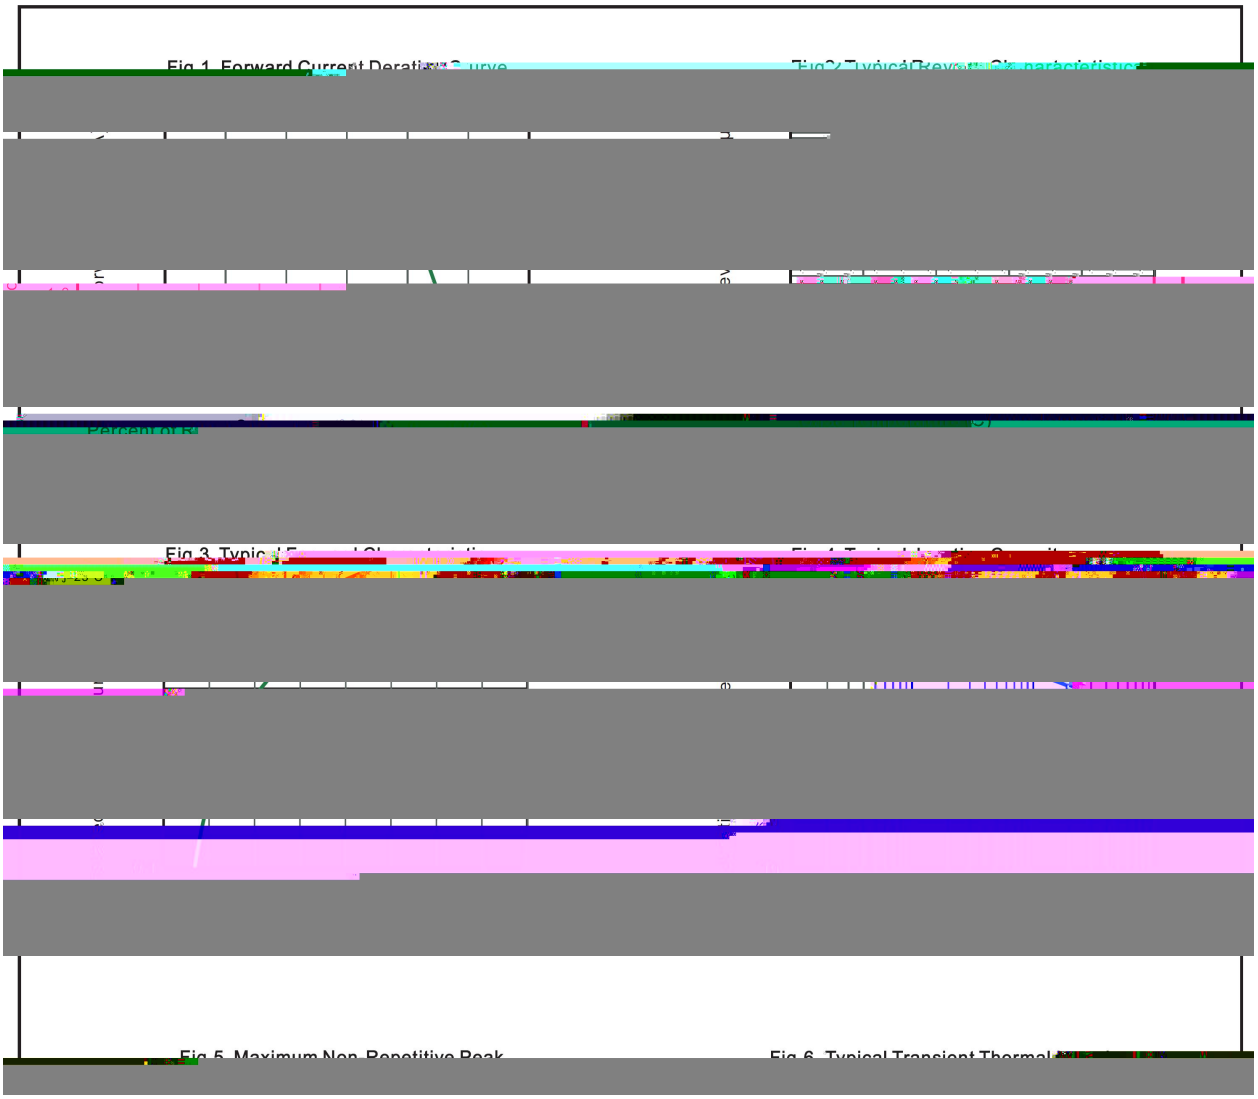

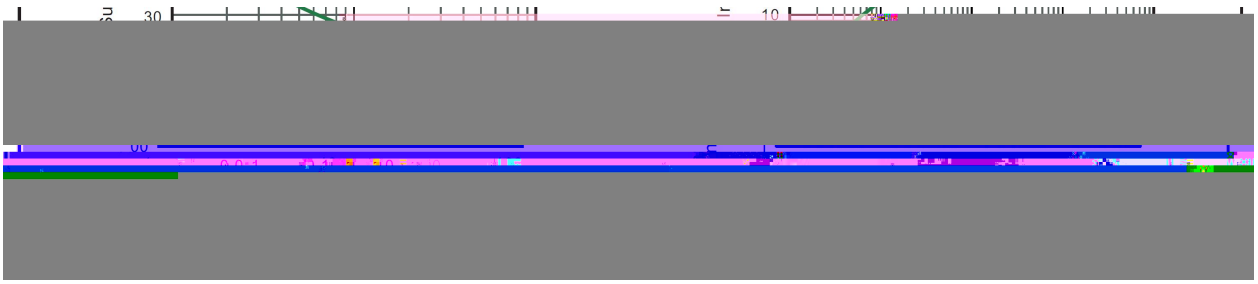


@A B C ?

SMB

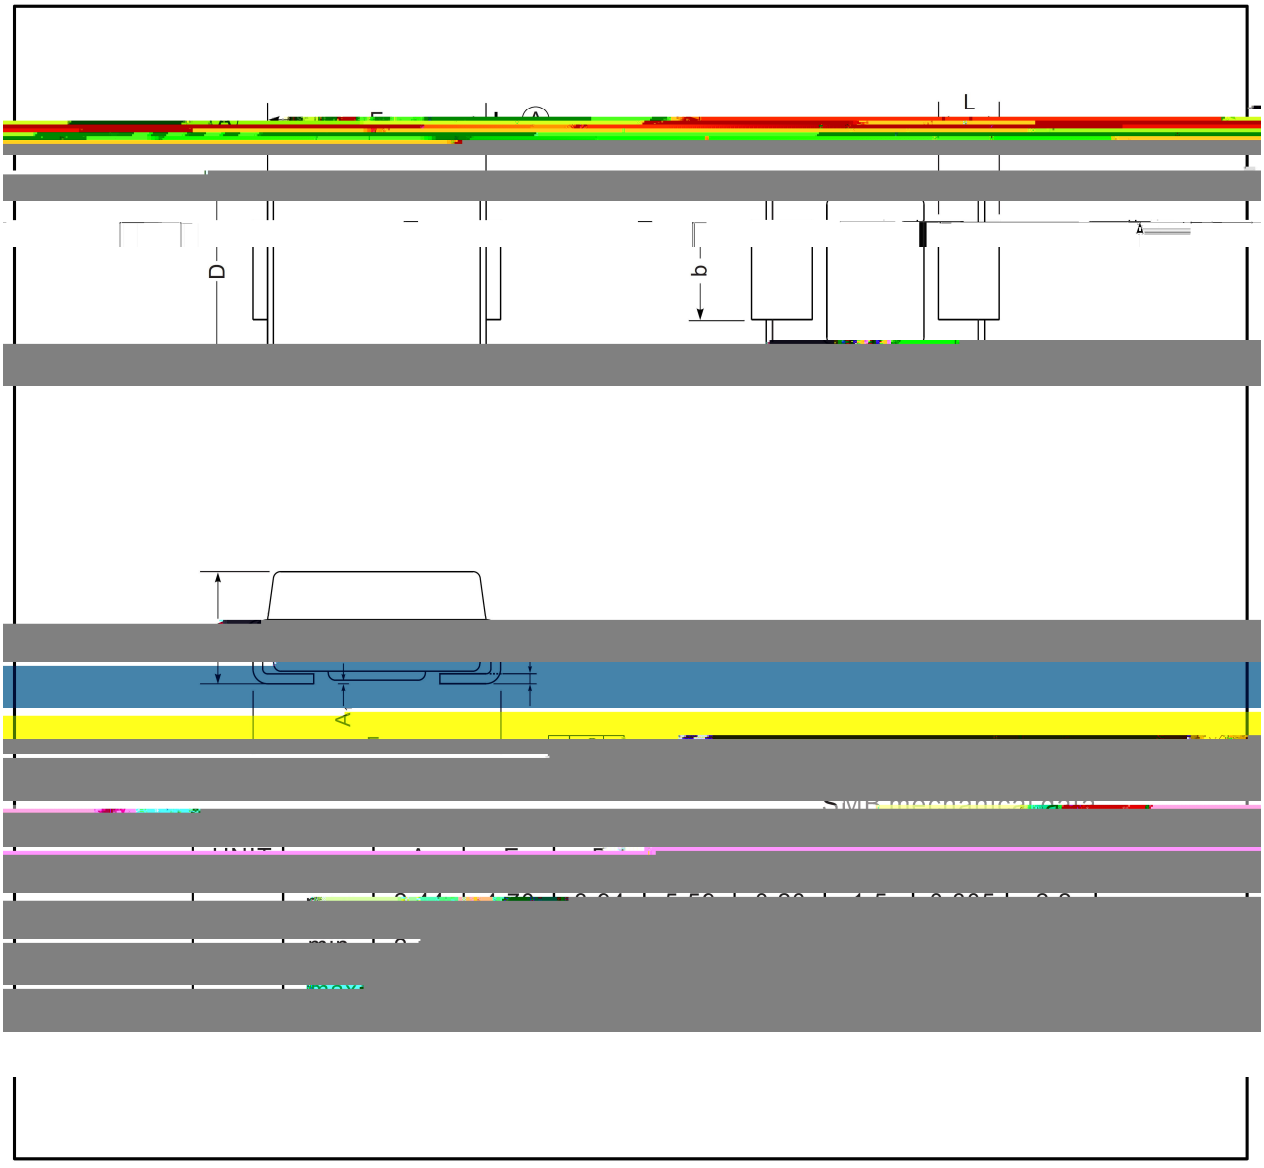


" # D E

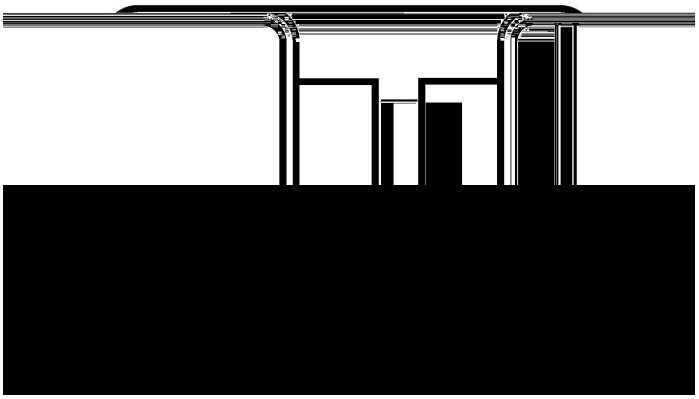

SSL26

1 **F**

H I J K L = > ? M N OPQRPSTUVSPGWSXYZ[PGYXSG\ ] G] PY[X ^ G _X[` PSZabcWdefSPPg

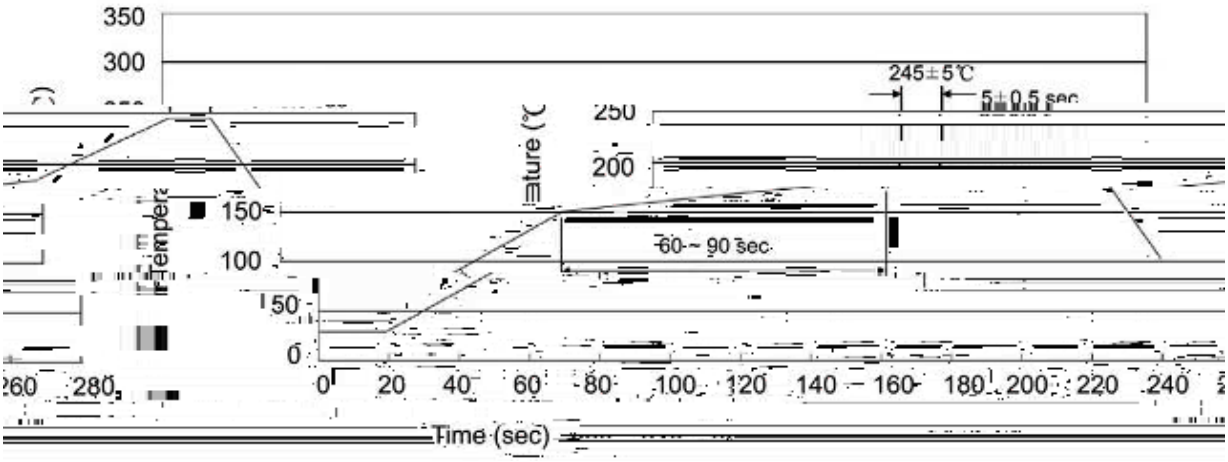

Note:

1 150 180 60 90sec;

1.Preheating:150~180 , Time:60~90sec.

2 245±5 5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.

3 2 10 /sec.

3. Cooling Speed: 2~10 /sec.

h J i j k l m n

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

o p q r

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	nits / /Re 只t卷盘e	s / /Rtl / d r Be 卷盘t盒e	nitl / d r Be 只t盒e	l / d r B/i to xn/ d r Be 盒t箱e	nito xn/ d r Be 只t箱e	s / /Re	l / d r B 盒e	o xn/ d r B 箱e
SMB	3000	5	15000	5	75000	7″ ×11	185X180X105	390X385X205

s * D E